

# Mitutoyo

Mitutoyo Quality

## High-Accuracy Height Gage Linear Height LH-600F/FG

Small Tool Instruments and  
Data Management

**NEW**  
Products



Catalog No.E12012(5)

# Easy operation and High-accuracy

In pursuit of intuitive operation and outstanding ease of use  
Achieves best-in-class accuracy of  $\pm (1.1+0.6L/600) \mu\text{m}$

## High-Accuracy Height Gage Linear Height LH-600F/FG

- Easy operation using keypad and touch screen navigation, even suitable for beginners
- Conduct various measurements such as 2D measurement and perpendicularity measurement with just one tool
- Versatile measurements through optional probes
- Enhanced data output functions make it easier to manage your measurement data



# Linear Height



Easy operation using keypad and touch screen navigation, even suitable for beginners

Contextual guidance on the large-screen touch panel supports your measurements

**Simple, straightforward keys with icons**  
Icons allow the user to find the required operation at a glance.

**Basic measurements**

Height (top) measurement	Height (bottom) measurement	Width (inside) measurement	Width (outside) measurement
Shaft (top) measurement	Shaft (bottom) measurement	Circle (shaft) measurement	Max.-Min. (top) measurement
Hole (bottom) measurement	Hole (top) measurement	Circle (hole) measurement	Max.-Min. (bottom) measurement

**Advanced measurement functions**   **Power**

Part program measurement	2D measurement	Power

**Measurement settings**

Measurement origin setting	Probe selection	Measurement origin switching

**Other**

Home screen	System settings	Data output

**Touch panel with guidance**  
Measurement guidance is displayed on the large touch panel of the 8.4-inch color LCD, enabling intuitive operation.

Guidance screen

Operable with gloves

Fantastic features for shop-floor use

**Automatic scale check**

On start up the user is led through the menu to set the scale origin and run the automated procedure to check the scale for contamination.

**Calibration reminder**

A notification will be displayed before the calibration due date that the user has set.



Home screen

With the intuitive menu, even beginners can easily access various operations and settings.

Touch panel

or

Sheet key

Measurements

- Basic measurements (ABS)
- Basic measurements (ABS, INC×5)
- Angle measurements
- Hole position measurements
- Perpendicularity and straightness measurements
- 2D measurements
- Part program measurements (1D, 2D)

Guidance and measurement navigation

Guidance is available in 21 languages. The display shows each measurement step and it's very easy to use even for beginner.


Select basic measurements

Select a measurement method

Conduct the measurement

View the measurement results

Operation log

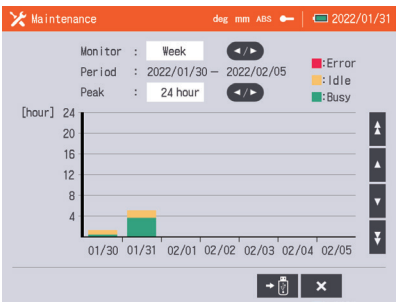

Operation log data is retained for up to 2 months, and can be output to a USB memory device.

Repeat measurement function

Label	000/00	deg	mm	ABS	deg	rad
001	ABS	CIRCLE-001	⌀	Z	88.8033	
002	ABS	CIRCLE-001	⌀	D	24.3765	
003	ABS	CIRCLE-001	⌀	ΔZ	88.8033	
004	ABS	HEIGHT-001	⌞	Z	76.7962	
005	ABS	HEIGHT-001	⌞	ΔZ	-12.0071	



To enable efficient measurements the user can repeat the last measurement with the optional foot switch or on-screen button.

## Various measurements with just one unit

Improved usability and accessibility, including advanced measurement functions


### 2D measurement - Pre-placement -

This function allows the user to register the hole position of the workpiece before measurement.

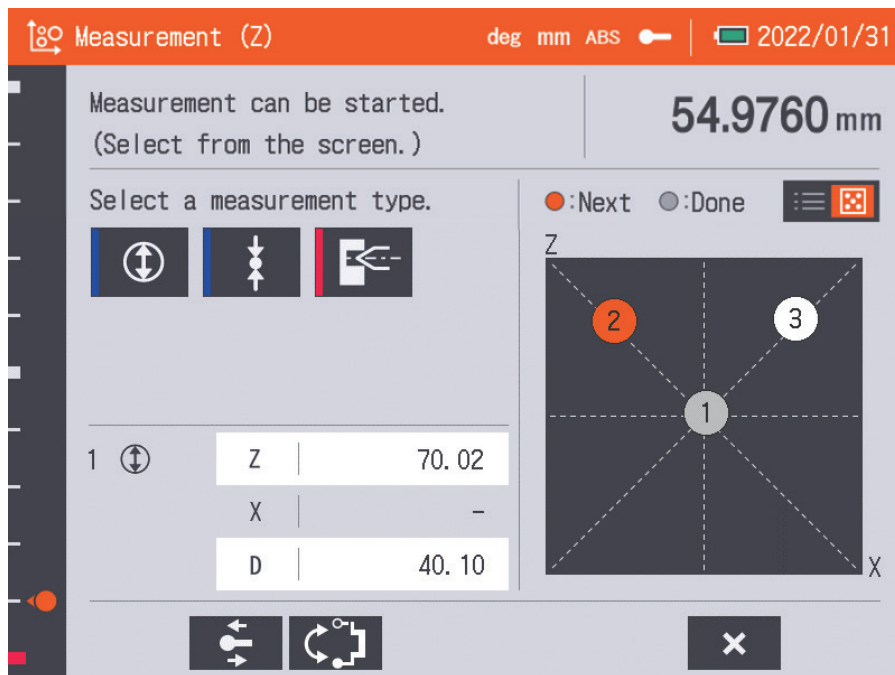


### Perpendicular/straightness measurement - Graph creation -


You can check the measurement results of perpendicularity and straightness in real time during measurement. After measurement, you can easily see the trends of the measurement results in a graph.

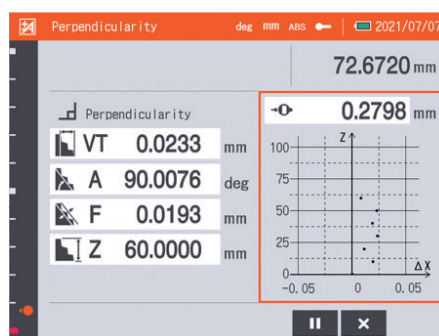


Show results in real time during measurement.

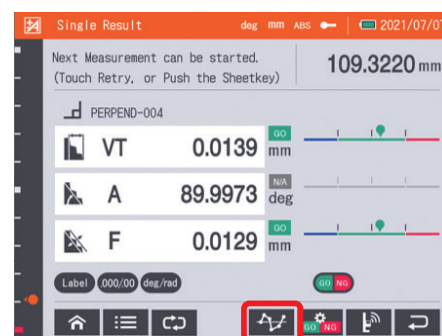

Show results after measurement.

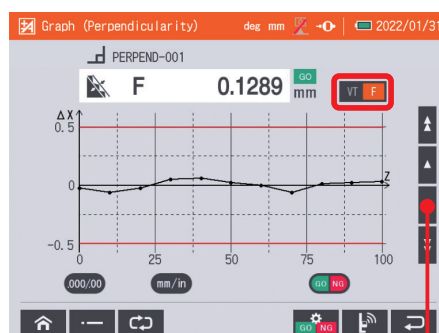


You can monitor the graphs of past measurement results.

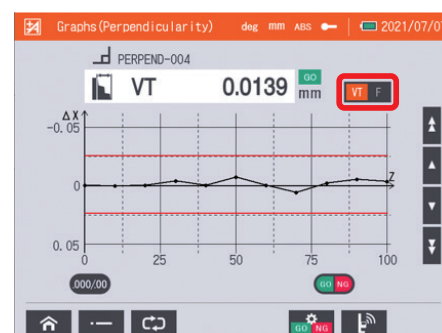

Show measurement results in graph form.


## Part program measurement

You can easily access and use the functions of Create, Run, Edit, and View results of part programs.

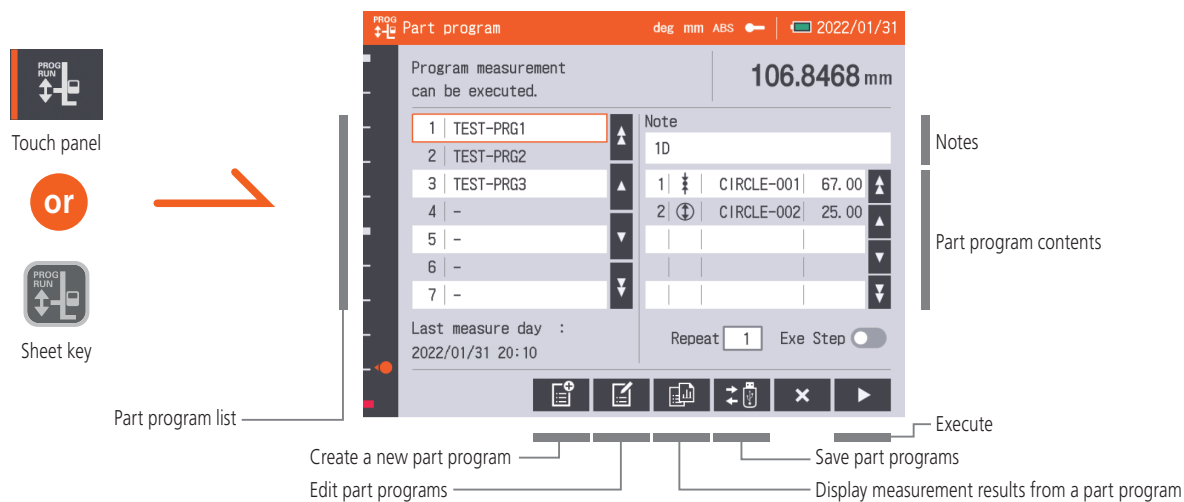

### Example of performing part program measurement

Run the program repeatedly (when the number of executions is  $\neq 1$ )

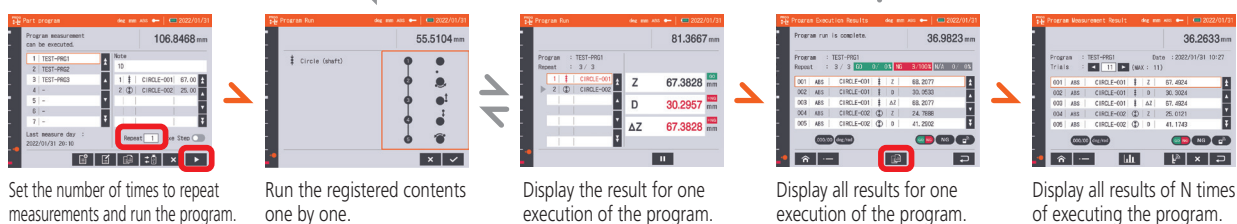


### Copy part programs to other devices


By using a USB memory device, you can copy part programs to other devices.

## Expanded measurement area

With the new optional probes, you can now measure areas that were beyond the capacity of conventional probes.

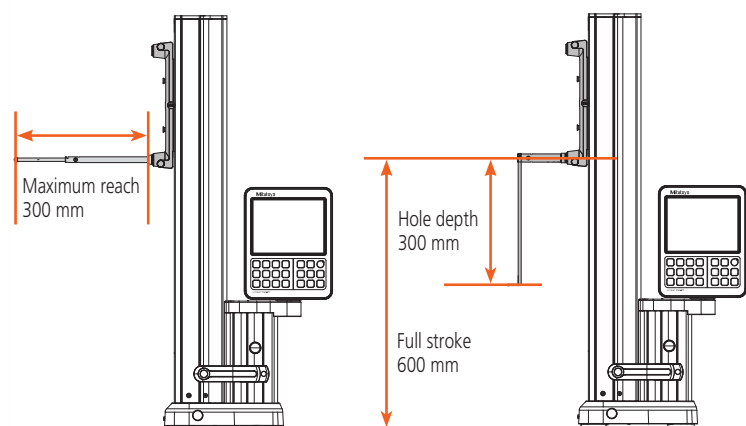

### Example of deep hole measurement

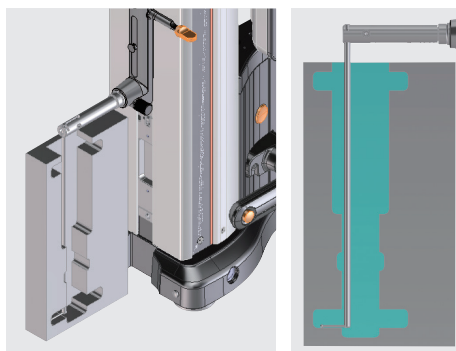




# Versatile measurements through optional probes


An extension holder and a depth stylus extend the measuring range both horizontally and vertically

Three types of optional probes:

- ① The holder and the stylus can be freely combined according to the purpose of measurement, and the measurement area can be changed.
  - ② This type is used for single-use measurements such as measuring a tapered hole or a knife edge.
  - ③ This type is used to measure straightness and perpendicularity.
- ☆ You can adjust the balance of the slider by adjusting the number of auxiliary weights.  
(Magnetic auxiliary weights are easy to add and remove.)

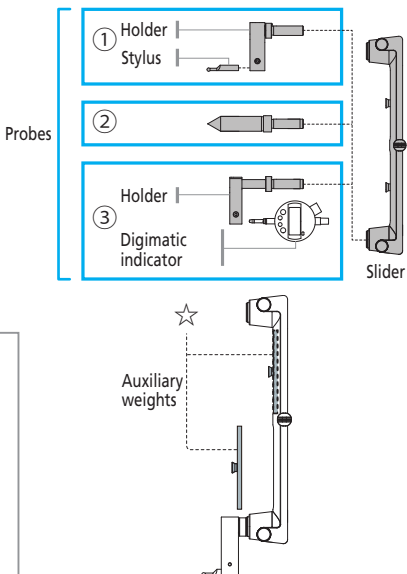

Optional probe mounting positions

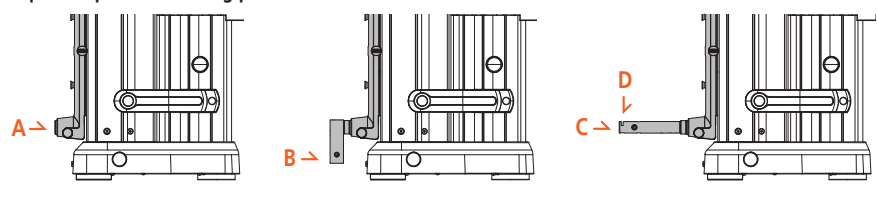























## Holders/styli for position A

		Part No.	Product name	Number of weights
<b>Mounting example</b> For extension holder 100		<b>12AAY343</b>	ø5 stepped probe (standard accessory)	2
		<b>12AAA792</b>	Holder for Dial Indicator (millimeter)	0
		<b>12AAA793</b>	Holder (long)	*1
<b>For depth measurement probes</b>		<b>12AAB136</b>	ø10 cylindrical universal probe	2
		<b>12AAY595</b>	Extension holder 100	*1
<b>For taper stylus (ø20)</b>		<b>12AAY596</b>	Extension holder 200	*1
		<b>12AAC072</b>	Depth probe	2
		<b>12AAC073</b>	Tapered stylus (ø20)	2

\*1: Please refer to page 8 for the number of weights to be used.














## Styli for position B/C

		Part No.	Product name	Number of weights*3
<b>Mounting example</b> Ø5 ball stylus L130 in position B 		<b>12AAF666</b>	Ø1 ball stylus (coaxial type)	2
		<b>957261</b>	Ø2 ball stylus (coaxial type)	2
<b>Mounting example</b> Ø5 ball stylus L130 in position C 		<b>12AAF667</b>	Ø2 ball stylus (coaxial type), ruby ball	2
		<b>957262</b>	Ø3 ball stylus (coaxial type)	2
		<b>957263</b>	Ø4 ball stylus (coaxial type)	2
		<b>12AAB552</b>	Ø10 ball stylus (coaxial type), L=50	2
		<b>12AAF668</b>	Ø10 ball stylus (coaxial type), L=82	1
		<b>12AAF669</b>	Ø10 ball stylus (coaxial type), L=120	1
		<b>12AAF670</b>	Ø5 disk stylus	2
		<b>12AAF671</b>	Ø10 disk stylus	2
		<b>957264</b>	Ø14 disk stylus	2
		<b>957265</b>	Ø20 disk stylus	2
		<b>12AAF672</b>	Ø1 ball stylus (eccentric type)	2
		<b>12AAF673</b>	Ø2 ball stylus (eccentric type)	2
		<b>12AAA788</b>	Ø4 ball stylus (eccentric type)	2
		<b>12AAA789</b>	Ø6 ball stylus (eccentric type)	1
		<b>226117</b>	Shank with M2 thread*2	2
		<b>226118</b>	Shank with M3 thread*2	2
		<b>12AAY597</b>	Ø5 ball stylus L130	1
		<b>12AAY598</b>	Ø25 disk stylus	1

\*2: Stylus for coordinate measuring machine can be mounted. \*3: When using an extension holder Note: Where the material is not described, the tip of the stylus is carbide.


## Styli for position D

		Part No.	Product name	Number of weights*4
<b>Mounting example</b> Depth stylus 70 is mounted in position D 		<b>12AAY599</b>	Depth stylus 70	2
		<b>12AAY600</b>	Depth stylus 150	1
<b>Mounting example</b> Depth stylus 150 Ø4 ball is mounted in position D 		<b>12AAY601</b>	Depth stylus 300	0
		<b>12AAY602</b>	Depth stylus 70 Ø2 ball	2
		<b>12AAY603</b>	Depth stylus 150 Ø2 ball	1
		<b>12AAY604</b>	Depth stylus 300 Ø2 ball	0
		<b>12AAY605</b>	Depth stylus 70 Ø4 ball	2
		<b>12AAY606</b>	Depth stylus 150 Ø4 ball	1
		<b>12AAY607</b>	Depth stylus 300 Ø4 ball	0

\*4: Can only be attached to the extension holder. \* Where the material is not described, the tip of the stylus is carbide.

# Enhanced data output functions make it easier to manage your measurement data

Data output improves work efficiency and the reliability of recorded data

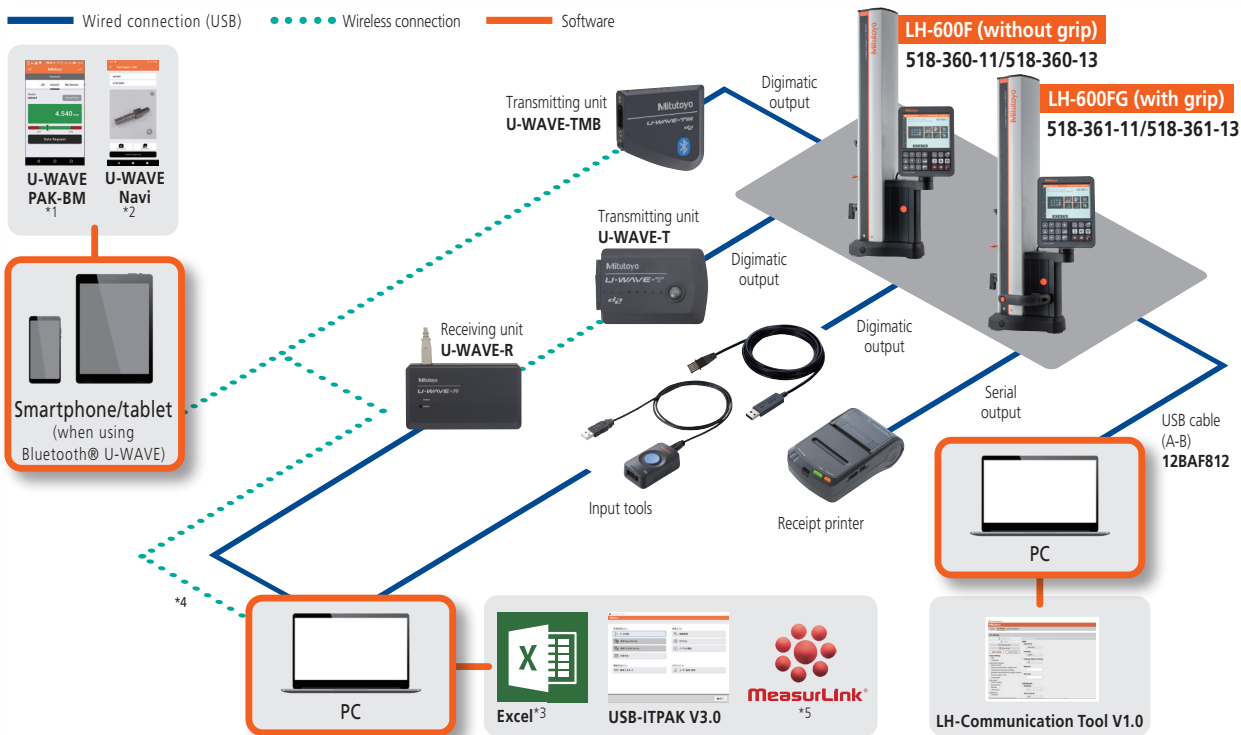

\*1: Available at Apple Store and Google Play for free download. \*2: Available at Google Play for free download.  
\*3: Excel is a registered trademark of Microsoft Corporation. \*4: It is also possible to connect with a Bluetooth compatible PC.  
\*5: MeasurLink® is a registered trademark of Mitutoyo Corporation (Japan) and Mitutoyo America Corporation (USA).

## Optional products for outputting measurement data

Part No.	Product name
12AAY481	Receipt printer (for Japan)*6
12AAY482	Receipt printer (for North America)*6
12AAY483	Receipt printer (for EU countries, excluding the UK)*6
12AAY484	Receipt printer (for the UK)*6
12AAN052	Printer paper for receipt printer (set of 10)
12AAY485	Printer mounting attachment
12AAN146	Connection cable for printer (USB memory device)*7
12BAF812	USB cable (type A - type B) (2 m)
543-700B	Digimatic indicator (ID-C0512NXXB)
543-701B	Digimatic indicator (ID-C0512MNXB)
519-521	Lever head probe MLH-521
519-561	Mu-checker M-561


\*6: A small printer (optionally battery-powered) that can be mounted on the main unit. It includes a printer cable and mounting bracket.  
\*7: USB memory devices should be formatted with FAT16/32. NTFS and exFAT are not supported.

Part No.	Product name
936937	Digimatic cable (1 m)
965014	Digimatic cable (2 m)
264-505	Digimatic mini processor (DP-1VA)
06AGQ001F	Input tool (USB-ITN-SF)
264-020	Input tool (IT-020U)
06AGL011	Bidirectional digimatic S1 cable, Flat and straight (1 m)
06AGL021	Bidirectional digimatic S1 cable, Flat and straight (2 m)
12AAJ088	Foot switch
02AZD810D	U-WAVE-R
264-626	U-WAVE-TMB (IP67 type)
264-627	U-WAVE-TMB (Buzzer type)
02AZD730G	U-WAVE-T (IP67 type)
02AZD880G	U-WAVE-T (Buzzer type)
12AAY486	U-WAVE T mounting bracket
02AZG011	Bidirectional Digimatic S1 cable (160 m)

## LH-Communication Tool V1.0 software for creating inspection reports and configuring system settings

You can easily create and save inspection reports and configure device parameters.

\* Available at Mitutoyo website for free download.  
\* To connect to a PC, use a USB cable (type A-B).

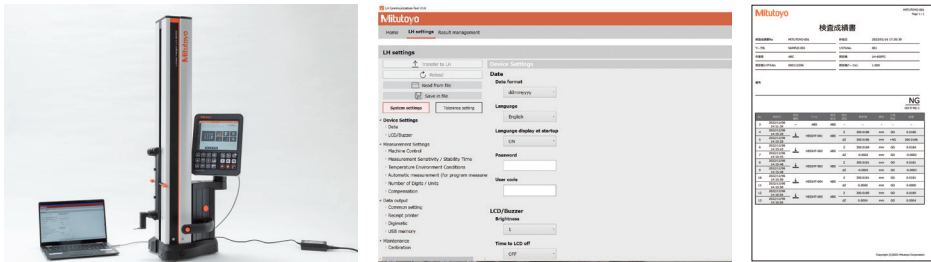



## Specifications

Model		LH-600F	LH-600FG
Order No.	mm	518-360-11	518-361-11
	inch/mm	518-360-13	518-361-13
Power grip		without power grip	with power grip
Measuring range (Stroke)		0 to 977 mm (600 mm) 0 to 38 in (24 in)	
Resolution		0.0001/0.001/0.01/0.1 mm (selectable) 0.000001/0.00001/0.0001/0.001 in (selectable)	
Accuracy (at 20 °C)	Indication accuracy* <sup>8</sup>	$\pm (1.1 + 0.6L / 600) \mu\text{m}$ , L= Measured length (mm)	
	Repeatability* <sup>8</sup>	Plane: 0.4 $\mu\text{m}$ (2 $\sigma$ ), Hole: 0.9 $\mu\text{m}$ (2 $\sigma$ )	
	Perpendicularity (forward and backward)* <sup>9</sup>	5 $\mu\text{m}$ (after compensation)	
	Straightness (forward and backward)* <sup>9</sup>	4 $\mu\text{m}$ (mechanical accuracy)	
Driving method(speed)		Motor-driven (5, 10, 15, 20, 25, 30, 40 mm/s: 7 steps) / Manual	
Scale unit		Photoelectric incremental encoder STVC-20Z	
Measuring force		1 N (automatic constant-force function)	
Main unit moving mode		Full-floating (moving) / Semi-floating (measuring) Air bearing (built-in compressor)	
Display unit		8.4 inch touch-screen, LCD	
Adjustment of display unit		Stepless tilt adjustment: 0 to 40° Stepless swivel adjustment: -30 to 180°	
Preventive maintenance		Scale status notification, calibration schedule notification	
Probe diameter compensation		· Semi-automatic compensation using the probe diameter calibration block (standard accessory) · Compensation by inputting the probe diameter	
Power supply		AC adapter 100-240V $\pm$ 10% 50/60Hz/ Battery (NiMH)	
Battery operation time* <sup>10</sup>		Battery powered(standard): 4 hours, Powered by 2 batteries: 8 hours	
Battery charging time* <sup>11</sup>		Approx. 3.5 hours (can be used while charging)	
Dimensions (WxDxH)		238 (W) x 492 (D) x 996 (H) mm	
Mass		26.1 kg	26.6 kg
Operating temperature / humidity ranges		5 to 40 °C/ 20 to 80% RH (non-condensing)	
Data output		Digimatic d2/ S1 (bi-directional communication)	


\*8: Specification determined at in-house ambient temperature

\*10: In-house standard(floating and motor-driven vertical movement, operated at 25%)

\*9: Guaranteed when using the Lever Head (519-521) and Mu-Checker (519-561).

\*11: When ambient temperature is 30 °C or higher, the battery may not be charged sufficiently.

## Dimensions

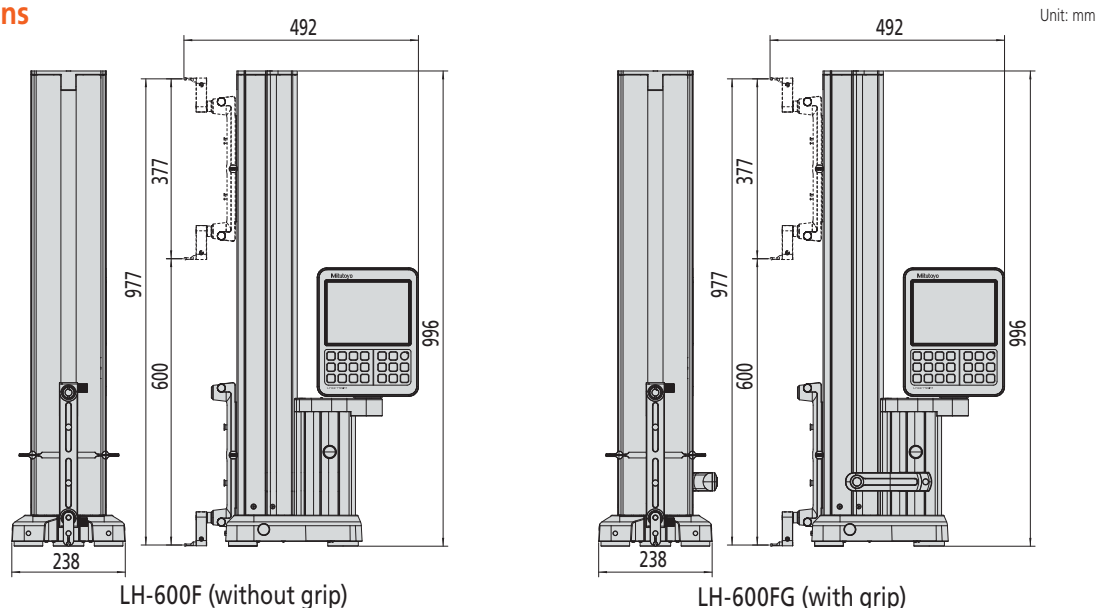

## Standard accessories

ø5 stepped probe, ball-diameter compensation block (with cover and base), auxiliary weight (2 pcs. pre-mounted), battery pack (1 pc)\*<sup>12</sup>, AC adapter, power cable for AC adapter (optional), clear cover, conveying handle, cap, hex wrench, manual set, inspection certificate, Touch pen, protective sheet, Phillips screwdriver

\*12: One piece included as standard. Optional additional battery (using total of two batteries) for longer battery-powered operation.

## Special accessories

Additional battery pack (Part No.: **12AAF712**), model workpiece (Part No.: **12AAA879**)



**Whatever your challenges are, Mitutoyo supports you from start to finish.**

Mitutoyo is not only a manufacturer of top quality measuring products but one that also offers qualified support for the lifetime of the equipment, backed up by comprehensive services that ensure your staff can make the very best use of the investment.

Apart from the basics of calibration and repair, Mitutoyo offers product and metrology training, as well as IT support for the sophisticated software used in modern measuring technology. We can also design, build, test and deliver measuring solutions and even, if deemed cost-effective, take your critical measurement challenges in-house on a sub-contract basis.



**Find additional product literature and our product catalogue**

<https://www.mitutoyo.co.jp/global.html>

Our products are classified as regulated items under Japanese Foreign Exchange and Foreign Trade Law. Please consult us in advance if you wish to export our products to any other country. If the purchased product is exported, even though it is not a regulated item (Catch-All controls item), the customer service available for that product may be affected. If you have any questions, please consult your local Mitutoyo sales office.

Note: Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon. MITUTOYO and MiCAT are either registered trademarks or trademarks of Mitutoyo Corp. in Japan and/or other countries/regions. Other product, company and brand names mentioned herein are for identification purposes only and may be the trademarks of their respective holders.

# Mitutoyo

**Mitutoyo Corporation**

20-1, Sakado 1-Chome,  
Takatsu-ku, Kawasaki-shi,  
Kanagawa 213-8533, Japan  
T +81 (0) 44 813-8230  
F +81 (0) 44 813-8231  
<https://www.mitutoyo.co.jp>