

Digimatic Indicators

High-performance ABS Digimatic Indicator ID-FNX (Digimatic S1 supported) SERIES 543 — with Back-lit LCD Screen

- ID-F Series is a next-generation indicator with various new functions, supporting bidirectional communication. With the addition of the appropriate data cable and software, remote zero setting and gage setting can all be implemented from a connected PC, thereby improving your work efficiency.
- This series adopts an external power supply to operate a bright backlit display. The display color helps you make tolerance judgment at a glance.

Green indication for GO judgment Red indication for \pm NG judgment



- The next calibration due date can be set with an alarm to improve instrument management.
- The ABS (ABSOLUTE) scale restores the last origin position* automatically when the indicator is turned on, and realizes high reliability by eliminating over-speed errors.

* Refer to "Precautions for use" on page 07-2.



SPECIFICATIONS

Metric		ISO/JIS Type							Power source	Mass (g)
Code No.*3	Range (mm)	Resolution (mm)	Maximum permissible error (MPE)*1 (mm)				Maximum permissible limit (MPL)	Measuring force (N)		
			Partial measuring range P_{MPE}	Total measuring range E_{MPE}	Hysteresis H_{MPE}	Repeatability R_{MPE}				
543-855	12.7	0.0005/ 0.001/0.01 (selectable)	0.0025	0.0025	0.002	0.002	1.5 or less	AC adapter (5.9 V)		180
543-855B (flat back)							1.8 or less			170
543-851	25.4						2.3 or less			240
543-853	50.8		0.004	0.004						330
543-857			0.003	0.003						

Inch / Metric		ASME/ANSI/AGD Type							Power source	Mass (g)
Code No.*3	Range	Resolution	Maximum permissible error (MPE)*1 (in)			Maximum permissible limit (MPL)	Measuring force (N)			
			Overall*2	Hysteresis	Repeatability					
543-856	0.5 in/ 12.7 mm	0.00002/ 0.00005/ 0.0001/ 0.0005/ 0.001 in, 0.005/ 0.001/ 0.01 mm (selectable)	± 0.00010	0.00008	0.00008	1.5 or less	AC adapter (5.9 V)			200
543-856B (flat back)						1.8 or less				170
543-852	1 in/ 25.4 mm					2.3 or less				240
543-854	2 in/ 50.8 mm		± 0.00016							330
543-858			± 0.00012							

- Display: 7-digit display, sign, and analog bar with 2-color backlight
- Response speed: Unlimited

*1 These values apply to normal measurements at 20 °C.

*2 Overall magnification and linearity

*3 To denote your AC power cable add the following suffixes to the code No.: **A** for UL/CSA and PSE, **D** for CEE, **DC** for CCC, **E** for BS, **K** for KC, **No suffix** is required for JIS/100 V.

MeasurLinkTM ENABLED
Data Management Software by Mitutoyo

ABSOLUTETM



DIGIMATIC S1

Functions

- Peak detection (MAX/MIN)
 - Runout range measurement (MAX - MIN)
- Note: Peak detection
- 1) Sampling rate:
 - Resolution 0.0005 mm 50 readings/s
 - Resolution 0.001 mm, 0.01 mm 500 readings/s
 - 2) Capturing speed:
 - Resolution 0.0005 mm 50 μ m/s
 - Resolution 0.001 mm, 0.01 mm 500 μ m/s
- Zero-setting (INC system)
 - Presetting (ABS system)
 - Measuring direction switching
 - Tolerance judgment
 - Resolution switching
 - Simple calculation $f(x) = Ax$
 - Analog resolution selection
 - Data hold (when not connected to an external device)
 - Function Lock
 - Calibration schedule warning
 - Data output
 - Display rotation (330°)
 - Error alarm display

Product catalog
E12049



Video




Optional Accessories


Code No.	Type	Description
264-020	—	USB Input Tool Series USB Keyboard Signal Conversion Type IT-020U
06AGL011	SF	Connection cable (1 m)
06AGL021	SF	Connection cable (2 m)
06AGQ001F	SF	USB Input Tool Direct (2 m)
02AZG011	SF	Connection cable for U-WAVE-T (160 mm)
02AZG021	SF	Connection cable for U-WAVE-T For foot switch
264-622	IP67	U-WAVE-TM
264-623	Buzzer	U-WAVE-TM
02AZD810D	—	U-WAVE-R
264-626	IP67	U-WAVE-TMB
264-627	Buzzer	U-WAVE-TMB
02AZF700	—	Connecting unit for U-WAVE-TM/TMB (for ID-F/ID-C Series 12.7 mm/0.5 inch type only)
02AZF670	—	U-WAVE-TM/TMB mounting bracket: for Digimatic Indicators

- Lifting
Lifting lever: **21EZA198** (12.7 mm/0.5 inch type)
Lifting cable: **21JZA295** Stroke 12.7 mm: 12.7 mm/0.5 inch type
With auto-stop function: **21JZA301** (overall length 300 mm) 12.7 mm/0.5 inch type
Lifting knob: **21EZA105** (12.7 mm/0.5 inch type)
21EZA197 (25.4 mm/1 inch type)
21EZA200 (50.8 mm/2 inch type)
Lifting lever: **21EAA426**
(supplied with 25.4 mm and 50.8 mm models as standard.)
- Auxiliary spindle spring:
02ACA571 (25.4 mm/1 inch type)
02ACA773 (50.8 mm/2 inch type)
- Measurement data collection software
USB-ITPAK V3.0: 06AGR543
- Contact points for Mitutoyo's Digimatic indicators (optional)
Refer to pages 07-63 to 07-68 for details.
- Interchangeable back covers (optional)
Refer to pages 07-69 to 07-70 for details.
- Measuring stands (optional)
Refer to pages 07-97 to 07-103 for details.

DIMENSIONS

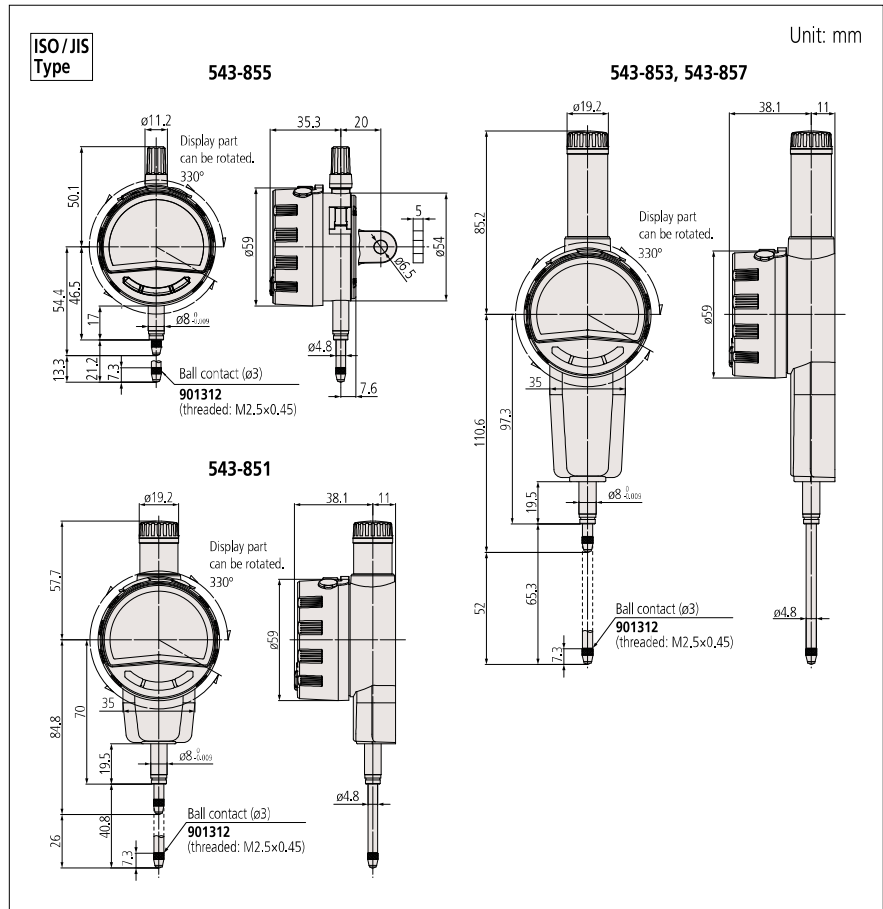

07
Indicators

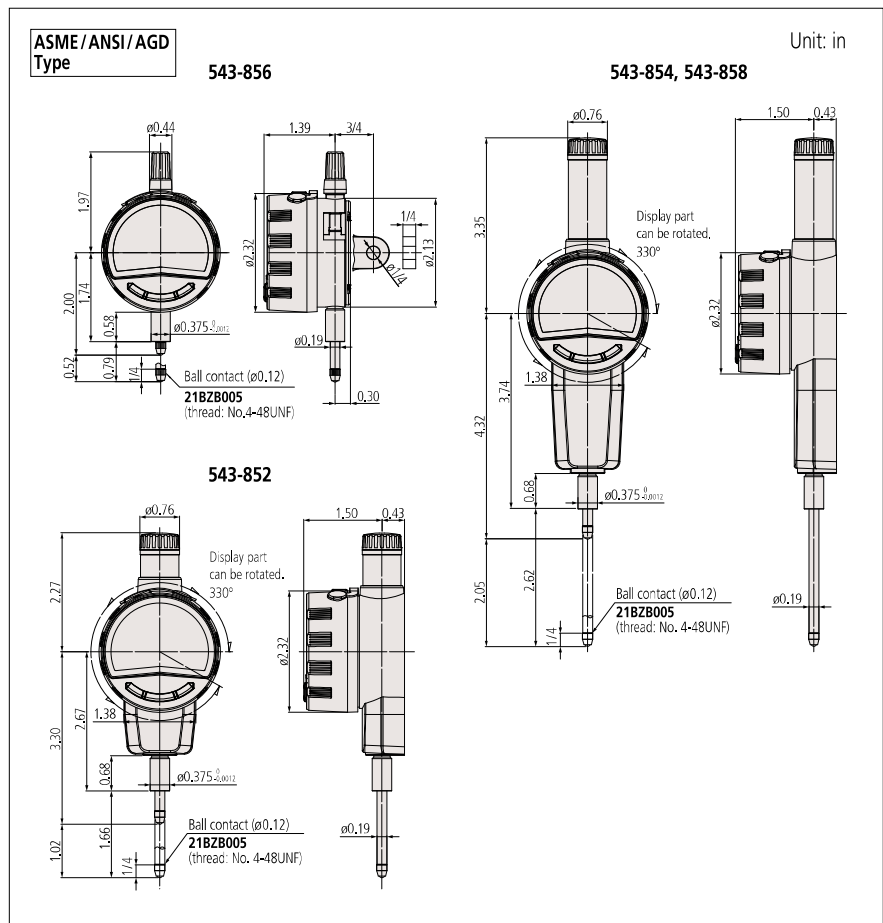

Digimatic Indicators

ABSOLUTE Digimatic Indicator ID-CNX (Digimatic S1 supported) SERIES 543 — Standard Type

- **ID-C** Series is a next-generation indicator with many new functions, supporting bidirectional communication. With the addition of the appropriate data cable and software, remote zero setting and gage setting can all be implemented from a connected PC, thereby improving your work efficiency.
- The digital display and analog bar indications help you to intuitively read the approach to the origin and tolerance values.
- The next calibration due date can be set with an alarm to improve instrument management.
- The ABS (ABSOLUTE) scale restores the last origin position* automatically when the indicator is turned on, and realizes high reliability by eliminating over-speed errors.
- Equipped with a data output port that enables incorporation into measurement networking and statistical process control systems. (Refer to page 09-3)



Measuring range
12.7 mm
543-700B

Measuring range
25.4 mm
543-720B

SPECIFICATIONS

Metric		ISO/JIS Type									
Code No.		Range (mm)	Resolution (mm)	Maximum permissible error (MPE)*1 (mm)				Maximum permissible limit (MPL)		Mass (g)	
w/lug	Flat back			Partial measuring range P_{MPE}	Total measuring range T_{MPE}	Hysteresis H_{MPE}	Repeatability R_{MPE}	Measuring force (N)		w/lug	Flat back
543-700	543-700B	12.7	0.0005/ 0.001/0.01 (selectable)	0.003	0.003	0.002	0.002	1.5 or less		175	165
543-705*2	543-705B*2							0.4 to 0.7		170	160
—	543-720B							1.8 or less		—	195
—	543-730B	25.4	0.01	0.005	0.005	0.002	0.002	2.3 or less		—	260
543-710	543-710B	12.7						0.9 or less		170	160
543-715*2	543-715B*2	25.4						0.2 to 0.5		165	155
—	543-725B	50.8	0.04	0.02	0.02	0.02	0.01	1.8 or less		—	190
—	543-735B	50.8						2.3 or less		—	245

Inch / Metric		ISO/JIS Type									
Code No.		Range	Resolution	Maximum permissible error (MPE)*3 (mm)				Maximum permissible limit (MPL)		Mass (g)	
w/lug	Flat back			Partial measuring range P_{MPE}	Total measuring range T_{MPE}	Hysteresis H_{MPE}	Repeatability R_{MPE}	Measuring force (N)		w/lug	Flat back
543-701	543-701B	0.5 in/12.7 mm	0.00002/0.00005/ 0.0001/0.0005 in, 0.0005/0.001/ 0.01 mm (selectable)	0.003	0.003	0.002	0.002	1.5 or less		175	165
543-706*2	543-706B*2							0.4 to 0.7		170	160
—	543-721B							1.8 or less		—	195
—	543-731B	1 in/25.4 mm	0.0005 in/ 0.01 mm	0.005	0.005	0.002	0.002	2.3 or less		—	260
543-711	543-711B	2 in/50.8 mm						0.9 or less		170	160
543-716*2	543-716B*2	0.5 in/12.7 mm						0.2 to 0.5		165	155
—	543-726B	1 in/25.4 mm	0.04	0.02	0.02	0.02	0.01	1.8 or less		—	190
—	543-736B	2 in/50.8 mm						2.3 or less		—	245

Inch / Metric		ASME/ANSI/AGD Type									
Code No.		Range	Resolution	Maximum permissible error (MPE)*3 (in)			Maximum permissible limit (MPL)	Mass (g)			
w/lug	Flat back			Overall*4	Hysteresis	Repeatability		Measuring force (N)		w/lug	Flat back
543-702	543-702B	0.5 in/12.7 mm	0.00002/0.00005/ 0.0001/0.0005 in, 0.0005/0.001/0.01 mm (selectable)	±0.00012	0.00008	0.00008	1.5 or less	0.4 to 0.7		195	165
543-707*2	543-707B*2							1.8 or less		190	160
—	543-722B							2.3 or less		—	195
—	543-732B	1 in/25.4 mm	0.0005 in/0.01 mm	±0.00020	0.0010	0.0005	0.9 or less	2.3 or less		—	260
543-712	543-712B	2 in/50.8 mm						0.2 to 0.5		190	160
543-717*2	543-717B*2	0.5 in/12.7 mm						1.8 or less		185	155
—	543-727B	1 in/25.4 mm	±0.0015	0.0010	0.0005	0.0005	2.3 or less	1.8 or less		—	190
—	543-737B	2 in/50.8 mm						2.3 or less		—	245

- Display: 7-digit display, sign, and analog bar
- Power source: CR2032 battery (1 pc.), included as standard (for operational checks)
- Battery life: Approx. 2,700 hours of continuous use. Approx. 2.5 years under normal use.
(Depends on use of the indicator. The above values are reference values.)
- Response speed: Unlimited (except for scanning measurement)

*1 These values apply to normal measurements at 20 °C (Resolution: 0.0005 mm, Calculation coefficient: A=1)
*2 Low measuring force *3 These values apply to normal measurements at 20 °C. *4 Overall magnification and linearity



Functions

- Peak detection (MAX/MIN)
- Runout range measurement (MAX - MIN)
- Zero-setting (INC system)
- Presetting (ABS system)
- Measuring direction switching
- Tolerance judgment
- Resolution switching
(For 0.0005 mm or 0.00002 inch resolution type)
- Simple calculation: $f(x) = Ax$
- Function Lock
- Calibration schedule warning
- Auto power OFF
- Data output
- Display value holding (when no external device is connected)
- 330° rotary display
- Low battery/voltage alarm display
- Error alarm display

Example of ID-CNX installed on optional bore gage



Note: Direction setting, etc. is necessary when ID-CNX is used with a bore gage. Refer to the operation manual for details.

Spindle orientation for measurement

- Standard models with measuring range 12.7 mm:
Usable in all orientations.
- Models with measuring range 25.4 or 50.8 mm:
Usable between the contact point pointing downward and spindle in horizontal orientation. To use the contact point pointing upward, the auxiliary spindle spring (optional) is required.
- Low measuring force model: See "Setting measuring force on low measuring force models" below.

Setting measuring force on low measuring force models

The measuring force of models with low measuring force can be set by combining standard accessory springs and weights.

• 543-715(B)/716(B)/717(B)

Spindle orientation	Spring	Weight (approximately 0.1 N)	Maximum measuring force (N)
Pointing vertically downward	Yes	Yes	0.5 or less
	Yes	No	0.4 or less
	No	Yes	0.3 or less
	No	No	0.2 or less
Horizontal	Yes	No	0.3 or less

Note: Operation using configurations other than shown above is not guaranteed.

• 543-705(B)/706(B)/707(B)

Spindle orientation	Spring	Weight (approximately 0.1 N)	Maximum measuring force (N)
Pointing vertically downward	Yes	Yes	0.7 or less
	Yes	No	0.6 or less
	No	Yes	0.4 or less
	No	No	Not guaranteed

Note: Operation using configurations other than shown above is not guaranteed.

Product catalog
E12049



Video




Code No.	Type	Description
264-020	—	USB Input Tool Series USB Keyboard Signal Conversion Type IT-020U
06AGL011	SF	Connection cable (1 m)
06AGL021	SF	Connection cable (2 m)
06AGQ001F	SF	USB Input Tool Direct (2 m)
02AZG011	SF	Connection cable for U-WAVE-T (160 mm)
02AZG021	SF	Connection cable for U-WAVE-T For foot switch
264-622	IP67	U-WAVE-TM
264-623	Buzzer	U-WAVE-TM
02AZD810D	—	U-WAVE-R
264-626	IP67	U-WAVE-TMB
264-627	Buzzer	U-WAVE-TMB
02AZF700	—	Connecting unit for U-WAVE-TM/TMB (for ID-F/ID-C Series 12.7 mm/0.5 inch type only)
02AZF670	—	U-WAVE-TM/TMB mounting bracket: for Digimatic Indicators



- ## DIMENSIONS


ISO / JIS
Type

Unit: in

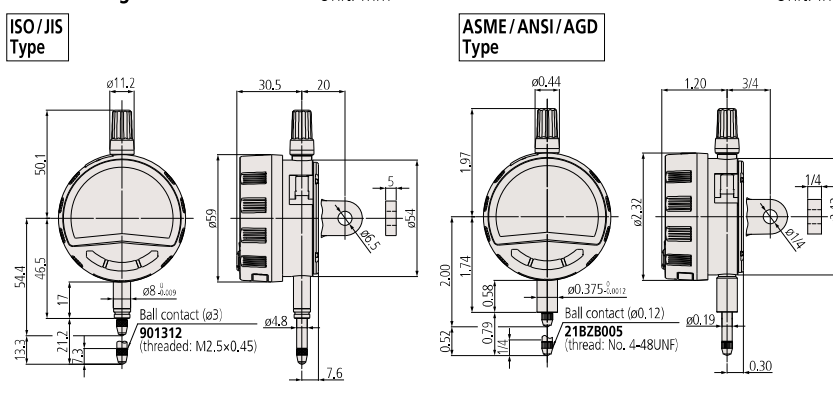


ISO / JIS
Type

Unit: in

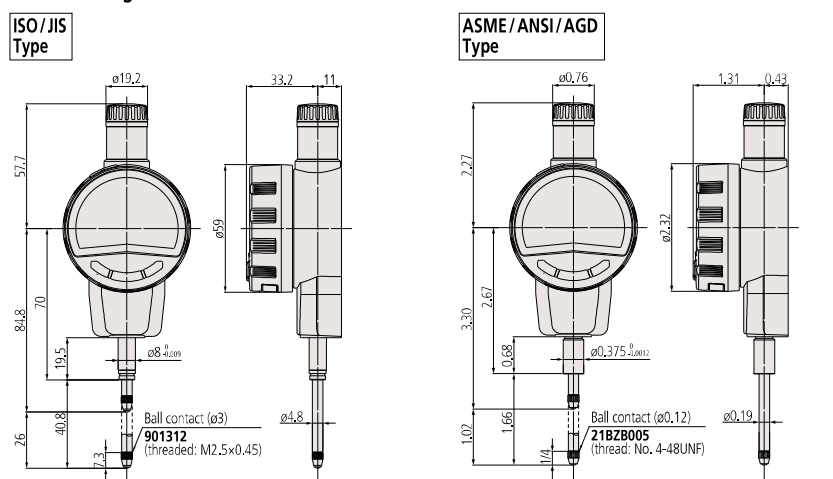

ISO / JIS
Type

Unit: in

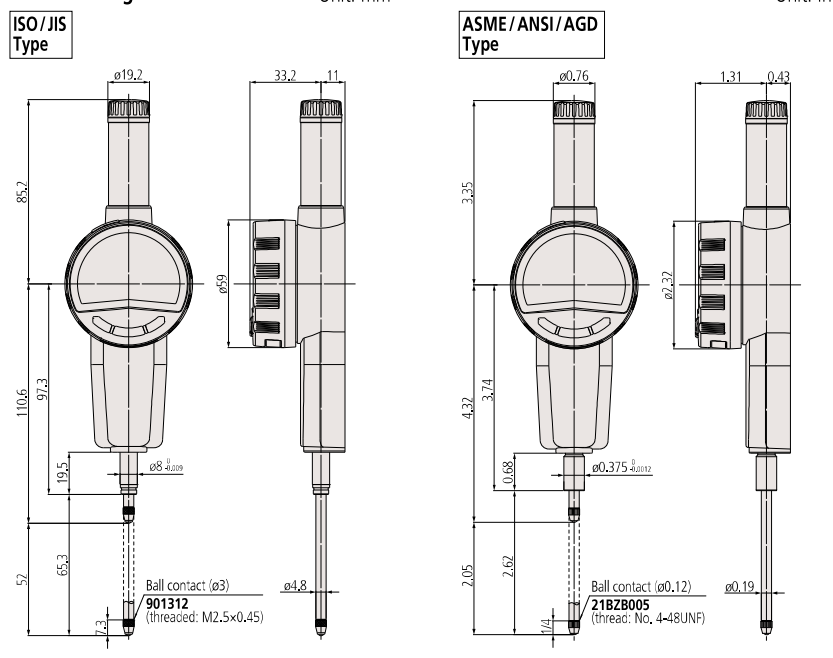

07 ■ Indicators

Digimatic Indicators

Digimatic Indicators

ABSOLUTE Digimatic Indicator ID-N/B SERIES 543 — with Dust/Water Protection Conforming to IP66

- Slim body design (body width: only 35 mm). Rated to IP66: Can be used confidently even in adverse environments.
- The ABS (ABSOLUTE) scale restores the last origin position* automatically when the indicator is turned on, and realizes high reliability by eliminating over-speed errors.
- Back plunger design (**ID-B**) is widely used for dial indicators. A 5 mm-stroke plunger with a higher degree of accuracy has been implemented by adopting a direct reading scale for plunger displacement.
- Tolerance judgment can be performed by setting upper and lower tolerance limits.
- Equipped with a data output port that enables incorporation into measurement networking and statistical process control systems. (Refer to page 09-3)

* Refer to "Precautions for use" on page 07-2.



543-575

543-585

SPECIFICATIONS

Metric		ISO/JIS Type						Remarks
Code No.	Range (mm)	Resolution (mm)	Maximum permissible error (MPE)*1 (mm)				Maximum permissible limit (MPL)	
			Partial measuring range P_{MPE}	Total measuring range E_{MPE}	Hysteresis H_{MPE}	Repeatability R_{MPE}	Measuring force (N)	
543-570	12.7	0.01	0.02	0.02	0.02	0.01	2.5 or less	Slim type
543-580	5.08						2.0 or less	Back Plunger type
543-575	12.7	0.001/0.01 (selectable)	0.003/0.01	0.003/0.01	0.002	0.002	2.5 or less	Slim type
543-585	5.08						2.0 or less	Back Plunger type

Inch/ Metric		ASME/ANSI/AGD Type					
Code No.	Range (in)	Resolution	Maximum permissible error (MPE)*1 (in)			Maximum permissible limit (MPL)	Remarks
			Overall*2	Hysteresis	Repeatability	Measuring force (N)	
543-571	0.5	0.0005 in/ 0.01 mm 0.0005/ 0.0005 in, 0.001/ 0.01 mm (selectable)	±0.0010	0.0010	0.0005	2.5 or less	Slim type
543-581	0.2					2.0 or less	Back Plunger type
543-576	0.5		±0.00010	0.00010	0.00010	2.5 or less	Slim type
543-586	0.2					2.0 or less	Back Plunger type

• Power source: SR44 battery (1 pc.), **938882** included as standard (for operational checks)

*1 These values apply to normal measurements at 20 °C.

*2 Overall magnification and linearity

Bifurcated connection cable with zero-setting terminal (optional)

21EAA210 (1 m), **21EAA211** (2 m)

Two of the wires inside the cable are separated for zero setting without touching the SET switch on the main body.

Use these wires in combination with commercially available switches. Zero setting is performed by briefly connecting these two wires together (less than a second), and ABS preset & recall by connecting for a second or more.




SPC cable



Bifurcated connection cable with zero-setting terminal

Mitutoyo

Typical application

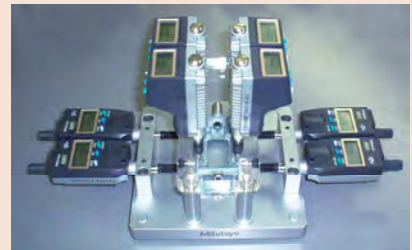

Functions

- Zero-setting (INC system)
- Presetting (ABS system)
- Measuring direction switching
- Tolerance judgment
- Display readout reversal
- Resolution switching (For 0.001 mm or 0.00005 in resolution type)
- Data output
- Display value holding (when no external device is connected)
- Low battery voltage alarm display
- Error alarm display

Optional Accessories

Code No.	Type	Description
264-020	—	USB Input Tool Series USB Keyboard Signal Conversion Type IT-020U
21EAA194	G	Connection cable (1 m)
21EAA190	G	Connection cable (2 m)
06AFM380G	G	USB Input Tool Direct (2 m)
02AZD730G	IP67	U-WAVE-T
02AZD880G	Buzzer	U-WAVE-T
02AZD790G	G	Connection cable for U-WAVE-T (160 mm)
02AZE140G	G	Connection cable for U-WAVE-T For foot switch
264-622	IP67	U-WAVE-TM
264-623	Buzzer	U-WAVE-TM
02AZD810D	—	U-WAVE-R
264-626	IP67	U-WAVE-TMB
264-627	Buzzer	U-WAVE-TMB
02AZF675	—	U-WAVE-TM/TMB mounting bracket: for ID-N (Slim Type)*

* Cannot be used with **ID-B** (Back Plunger Type) since it may apply stress to the cable.

Typical application



Rated to IP66 water-and dust-proofing standard, and oil resistance improved.



Optional Accessories

- Lug
21EZA145 (ISO/JIS type)
21EZA146 (ASME/ANSI/AGD type)
- Contact points for Mitutoyo's Digimatic indicators (optional)
Refer to pages 07-63 to 07-68 for details.
- Lifting knob (only for **ID-N**)
21EZA105 (ISO/JIS type)
21EZA150 (ASME/ANSI/AGD type)
Spindle can be manually lifted. Remove the spindle cap for **ID-N** and attach the lifting knob to the spindle. Note that water resistance is not maintained in this configuration.

Typical application using the lifting knob



- Rubber boot
For oil resistance (NBR) **21EAA423** (for **ID-N**)
21AAB562 (for **ID-B**)
For durability (silicone) **238774** (for **ID-N**)
21EAA212 (for **ID-B**)

DIMENSIONS



Slim Type ID-N

ISO/JIS
Type

Unit: mm

Unit: in



ASME/ANSI/AGD
Type

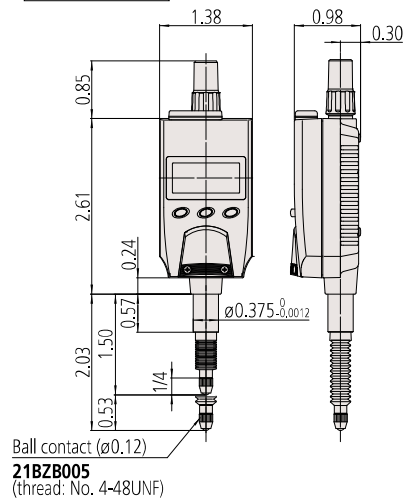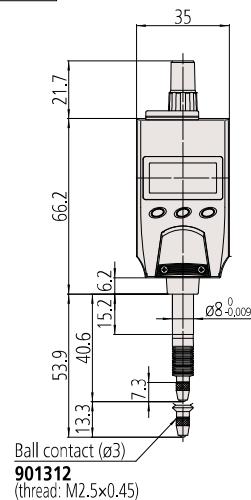

Back plunger Type ID-B

ISO/JIS
Type

ASME/ANSI/AGD
Type

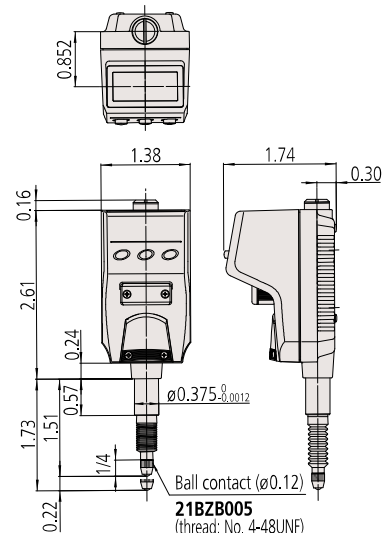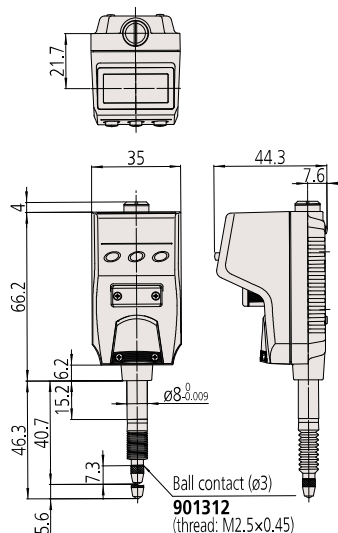

Digimatic Indicators

ABSOLUTE Digimatic Indicator ID-SX2 SERIES 543

- A standard model of indicator that is reliable and easy to use with basic functions.
- This model consumes less power than other advanced models and can operate longer without frequent battery replacement.
- The ABS (ABSOLUTE) scale restores the last origin position* automatically when the indicator is turned on, and realizes high reliability by eliminating over-speed errors.
- Equipped with a data output port that enables incorporation into measurement networking and statistical process control systems. (Refer to page 09-3)

* Refer to "Precautions for use" on page 07-2.



543-781-10

SPECIFICATIONS

Metric		ISO/JIS Type									
Code No.	Range (mm)	Resolution (mm)	Maximum permissible error (MPE)*1 (mm)				Maximum permissible limit (MPL)	Back type	Battery life*2	Mass (g)	Dust/Water protection level*3
			Partial measuring range P_{MPE}	Total measuring range T_{MPE}	Hysteresis H_{MPE}	Repeatability R_{MPE}					
543-790-10	12.7	0.001	0.003	0.003	0.002	0.002	1.5 or less	With lug	Approx. 18,000 hours (Continuous use) Approx. 5 years (Normal use)	150	IP42
543-790B-10								Flat		140	
543-794-10								With lug		155	
543-794B-10								Flat		155	
543-781-10	12.7	0.01	0.02	0.02	0.02	0.01	1.5 or less	With lug	Approx. 20,000 hours (Continuous use) Approx. 5 years (Normal use)	150	IP42
543-781B-10								Flat		140	

Inch/Metric		ISO/JIS Type									
Code No.	Range	Resolution	Maximum permissible error (MPE)*1 (mm)				Maximum permissible limit (MPL)	Back type	Battery life*2	Mass (g)	Dust/Water protection level*3
			Partial measuring range P_{MPE}	Total measuring range T_{MPE}	Hysteresis H_{MPE}	Repeatability R_{MPE}					
543-791-10	0.5 in/ 12.7 mm	0.00005 in/ 0.001 mm	0.003	0.003	0.002	0.002	1.5 or less	With lug	Approx. 18,000 hours (Continuous use) Approx. 5 years (Normal use)	150	IP42
543-791B-10								Flat		140	
543-795-10								With lug		155	
543-795B-10								Flat		155	
543-782-10	0.5 in/ 12.7 mm	0.0005 in/ 0.01 mm	0.02	0.02	0.02	0.01	1.5 or less	With lug	Approx. 20,000 hours (Continuous use) Approx. 5 years (Normal use)	150	IP42
543-782B-10								Flat		140	

Inch/ Metric		ASME/ANSI/AGD Type									
Code No.	Range	Resolution	Maximum permissible error (MPE)*1 (in)			Maximum permissible limit (MPL)	Back type	Battery life*2	Mass (g)	Dust/Water protection level*3	
			Overall*4	Hysteresis	Repeatability						
543-792-10	0.5 in/ 12.7 mm	0.00005 in/ 0.001 mm	±0.00010	0.00010	0.00010	1.5 or less	With lug	Approx. 18,000 hours (Continuous use) Approx. 5 years (Normal use)	165	IP42	
543-792B-10		Flat					140				
543-793-10		With lug					165				
543-793B-10		Flat				140					
543-796-10		0.00005 in/ 0.001 mm				2.5 or less	With lug		155		IP53
543-796B-10							Flat		155		
543-783-10	0.0005 in/ 0.01 mm	±0.0010	0.0010	0.0005	1.5 or less	With lug	Approx. 20,000 hours (Continuous use) Approx. 5 years (Normal use)	165	IP42		
543-783B-10						Flat	140				

- Display: 6-digit display, sign
- Usable orientation: All
- Position detection method: ABSOLUTE electrostatic linear encoder
- Power source: SR44 battery (1 pc.). **938882** included as standard (for operational checks)
- Response speed: Unlimited (except for scanning measurement)

*1 These values apply to normal measurements at 20 °C.

*2 The battery life varies, depending on the number of times a Digimatic indicator is used as well as the way it is used.

The values listed above are approximations.

*3 This is only valid when the data socket cover is in place. Does not apply if the cover is removed, a lifting accessory is attached, or a connection cable is attached.

*4 Overall magnification and linearity

MeasurLink[™] ENABLED
Data Management Software by Mitutoyo

ABSOLUTE[™]

IP53



Applicable models:
See **SPECIFICATIONS**

Functions

- Origin set (Zero-setting)
- Measuring direction switching
- Data output
- Low battery voltage alarm display
- Error alarm display



Optional Accessories

Code No.	Type	Description
264-020	—	USB Input Tool Series USB Keyboard Signal Conversion Type IT-020U
905338	F	Connection cable (1 m)
905409	F	Connection cable (2 m)
06AFM380F	F	USB Input Tool Direct* (2 m)
02AZD790F	F	Connection cable for U-WAVE-T (160 mm)
02AZE140F	F	Connection cable for U-WAVE-T For foot switch
264-622	IP67	U-WAVE-TM
264-623	Buzzer	U-WAVE-TM
02AZD810D	—	U-WAVE-R
264-626	IP67	U-WAVE-TMB
264-627	Buzzer	U-WAVE-TMB
02AZF670	—	U-WAVE-TM/TMB mounting bracket: for Digimatic Indicators

* Please separately purchase **USB-ITPAK** since there is no data output switch on the measurement instrument. (Refer to pages 09-15 to 09-17 for details.)

- Lifting
Lifting lever **21EZA198**
Lifting knob **21EZA105**
Lifting cable **21JZA295**
With auto-stop function:
21JZA301 (overall length 300 mm)
- Contact points for Mitutoyo's Digimatic indicators (optional)
Refer to pages 07-63 to 07-68 for details.
- Interchangeable back covers (optional)
Refer to pages 07-69 to 07-70 for details.
- Measuring stands (optional)
Refer to pages 07-97 to 07-103 for details.

DIMENSIONS

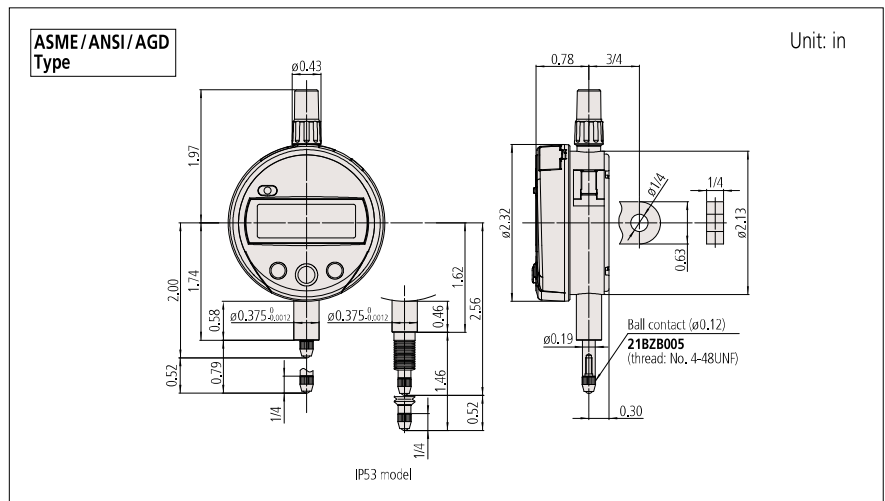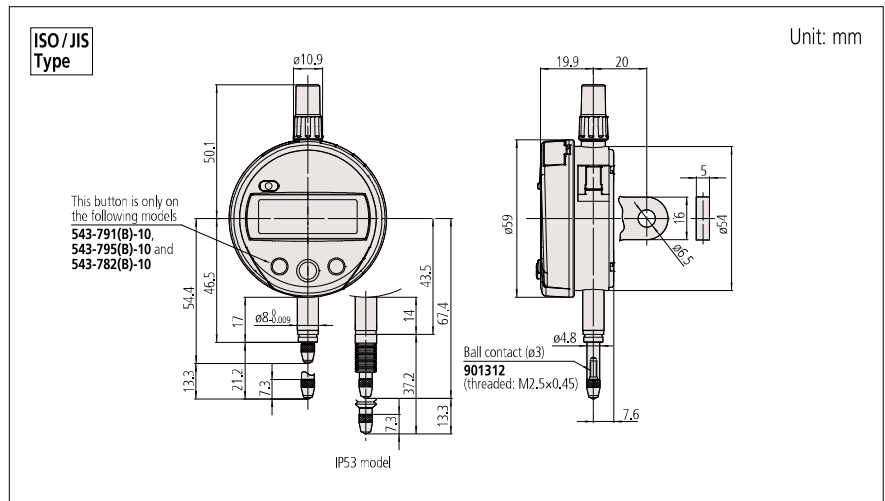

Digimatic Indicators

ABSOLUTE Digimatic Indicator ID-U SERIES 575 — Slim and Economical Design

- Cost-effective and user-friendly type with basic functions.
- Battery life: approx. 20,000 hours in continuous use.
- The ABS (ABSOLUTE) scale restores the last origin position* automatically when the indicator is turned on, and realizes high reliability by eliminating over-speed errors.
- Equipped with a data output port that enables incorporation into measurement networking and statistical process control systems. (Refer to page 09-3)

* Refer to "Precautions for use" on page 07-2.



575-121

SPECIFICATIONS

Metric		ISO/JIS Type					
Code No.	Range (mm)	Resolution (mm)	Maximum permissible error (MPE)*1 (mm)				Maximum permissible limit (MPL)
			Partial measuring range P_{MPE}	Total measuring range E_{MPE}	Hysteresis H_{MPE}	Repeatability R_{MPE}	Measuring force (N)
575-121	25.4	0.01	0.02	0.02	0.02	0.01	1.8 or less

Inch / Metric		ISO/JIS Type					
Code No.	Range	Resolution	Maximum permissible error (MPE)*1 (mm)				Maximum permissible limit (MPL)
			Partial measuring range P_{MPE}	Total measuring range E_{MPE}	Hysteresis H_{MPE}	Repeatability R_{MPE}	Measuring force (N)
575-122	1 in / 25.4 mm	0.0005 in / 0.01 mm	0.02	0.02	0.02	0.01	1.8 or less

Inch / Metric		ASME/ANSI/AGD type				
Code No.	Range	Resolution	Maximum permissible error (MPE)*1 (in)			Maximum permissible limit (MPL)
			Overall*2	Hysteresis	Repeatability	Measuring force (N)
575-123	1 in / 25.4 mm	0.0005 in / 0.01 mm	±0.0010	0.0010	0.0005	1.8 or less

- Display: 5-digit display, sign
- Power source: SR44 battery (1 pc.), **938882** included as standard (for operational checks)
- Battery life: Approx. 20,000 hours of continuous use. Approx. 5 years under normal use.

Note: It varies depending on use frequency and method. Please take the values as rough indications.

- Lifting lever: **21EAA426** (standard accessory)

*1 These values apply to normal measurements at 20 °C.

*2 Overall magnification and linearity

MeasurLinkTM ENABLED
Data Management Software by Mitutoyo



ABSOLUTETM

Function

- Origin set (Zero-setting)
- Measuring direction switching
- Data output
- Low battery voltage alarm display
- Error alarm display



Optional Accessories

Code No.	Type	Description
264-020	—	USB Input Tool Series USB Keyboard Signal Conversion Type IT-020U
905338	F	Connection cable (1 m)
905409	F	Connection cable (2 m)
06AFM380F	F	USB Input Tool Direct* (2 m)
02AZD730G	IP67	U-WAVE-T
02AZD880G	Buzzer	U-WAVE-T
02AZD790F	F	Connection cable for U-WAVE-T (160 mm)
02AZE140F	F	Connection cable for U-WAVE-T For foot switch
02AZD810D	—	U-WAVE-R
02AZE200	—	U-WAVE-T mounting bracket

* Please separately purchase **USB-ITPAK** since there is no data output switch on the measurement instrument. (Refer to pages 09-15 to 09-17 for details.)

- Spindle lifting cable (stroke: 10 mm): **21JZA295**
- With auto-stop function:
21JZA301 (overall length 300 mm)
- Contact points for Mitutoyo's Digimatic indicators (optional)
Refer to pages 07-63 to 07-68 for details.
- Measuring stands (optional)
Refer to pages 07-97 to 07-103 for details.

DIMENSIONS

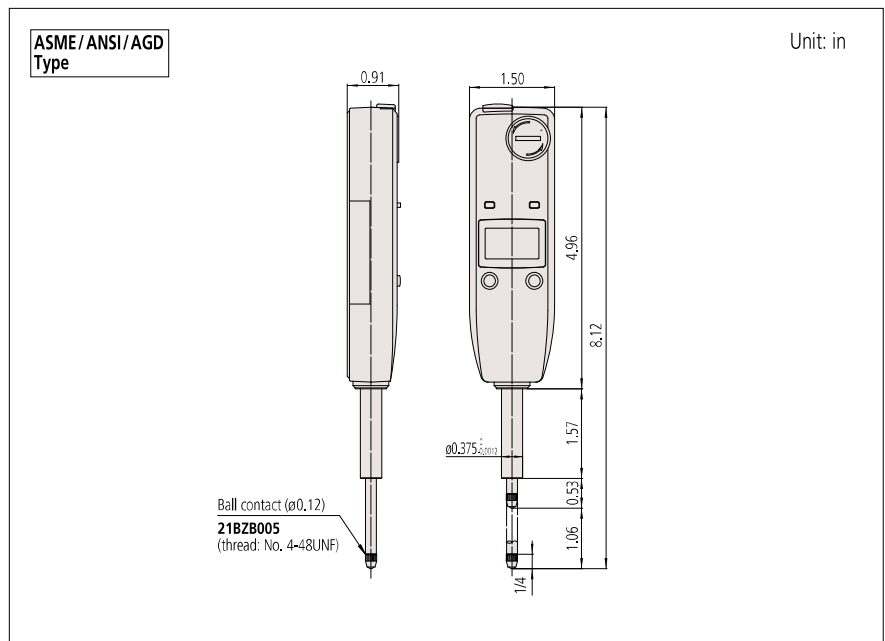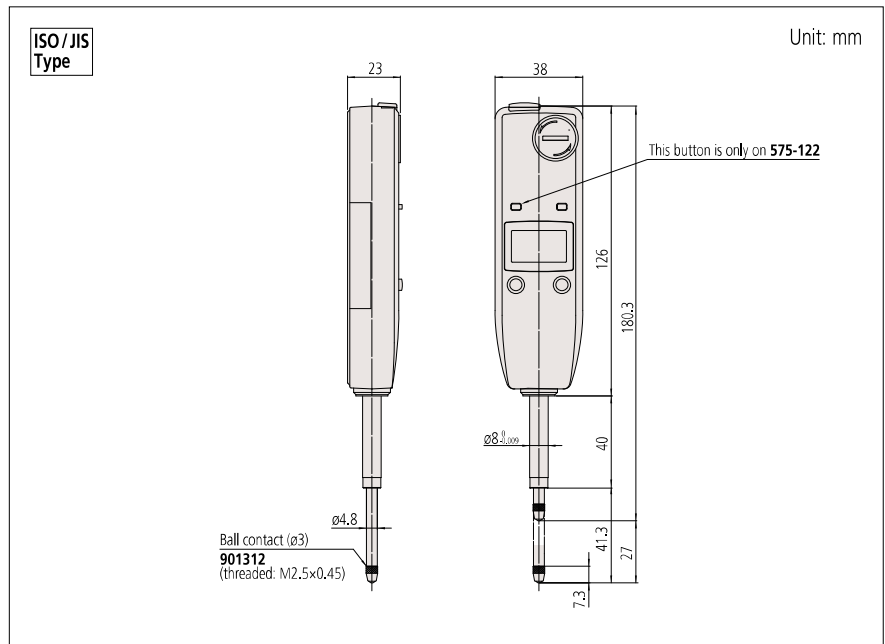

ABSOLUTE Digimatic Indicator ID-CAX SERIES 543 — Peak-Value Hold Type

- The Peak Hold-Type Digimatic Indicator. GO/NG judgment is performed by setting the upper and lower tolerances for max., min. and runout values.*1
- Five buttons, status icons, and clear button indications allow easy operation and various functions.
- Wide display and new analog bar graph are standard on all models.
- The ABS (ABSOLUTE) scale restores the last origin position*2 automatically when the indicator is turned on, and realizes high reliability by eliminating over-speed errors.
- Equipped with a data output port that enables incorporation into measurement networking and statistical process control systems. (Refer to page 09-3)
- By using the parameter setup kit (optional) and the dedicated software, the functions and the parameters can be configured using a computer.

*1 Tolerance judgment results cannot be output.

*2 Refer to "Precautions for use" on page 07-2.



543-300-10

SPECIFICATIONS

Metric		ISO/JIS Type							
Code No.	Range (mm)	Resolution (mm)	Maximum permissible error (MPE)* ¹ (mm)				Maximum permissible limit (MPL)	Battery life (normal use)* ²	Mass (g)
			Partial measuring range P_{MPE}	Total measuring range E_{MPE}	Hysteresis H_{MPE}	Repeatability R_{MPE}	Measuring force (N)		
543-300-10	12.7	0.001/0.01 (selectable)	0.003	0.003	0.003	0.002	1.5 or less	Approx. 1 year	180
543-300B-10 (flat back)									170

Inch / Metric		ISO/JIS Type							
Code No.	Range	Resolution	Maximum permissible error (MPE)* ¹ (mm)				Maximum permissible limit (MPL)	Battery life (normal use)* ²	Mass (g)
			Partial measuring range P_{MPE}	Total measuring range E_{MPE}	Hysteresis H_{MPE}	Repeatability R_{MPE}	Measuring force (N)		
543-301-10	0.5 in / 12.7 mm	0.00005 / 0.0001 / 0.0005 in, 0.001 / 0.01 mm (selectable)	0.003	0.003	0.003	0.002	1.5 or less	Approx. 1 year	180
543-301B-10 (flat back)									170

Inch / Metric		ASME/ANSI /AGD type							
Code No.	Range	Resolution	Maximum permissible error (MPE)* ¹ (in)			Maximum permissible limit (MPL)	Battery life (normal use)* ²	Mass (g)	
			Overall* ³	Hysteresis	Repeatability	Measuring force (N)			
543-302-10	0.5 in / 12.7 mm	0.00005 / 0.0001 / 0.0005 in, 0.001 / 0.01 mm (selectable)	±0.00010	0.00010	0.00010	1.5 or less	Approx. 1 year	195	
543-302B-10 (flat back)								170	

• Power source: CR2032 battery (1 pc.), included as standard (for operational checks)

*1 These values apply to normal measurements at 20 °C.

*2 Applies only if not connected to a data processor. Battery life depends on use of the indicator. Use the above value as a guide only.

*3 Overall magnification and linearity



Functions

- Peak detection (MAX/MIN)
- Runout (MAX - MIN) Hold
- Note: Peak detection
 - 1) Sampling rate: 50 readings/s
 - 2) Capturing speed: 50 μm/s (max.)
- Zero set (INC system)
- Preset function (ABS system)
- Measuring direction switching
- Tolerance judgment (3 pairs of ABS, INC memory function)
- Resolution selection
- Simple calculation $f(x) = Ax$
- Analog bar resolution selection
- Key lock
- in/mm conversion (inch/mm type)
- Display hold (when no external device is connected)
- Data output
- External PC setting input
- Display rotation (330°)
- Low battery voltage alarm display
- Error alarm display

Optional Accessories

Code No.	Type	Description
264-020	—	USB Input Tool Series USB Keyboard Signal Conversion Type IT-020U
905338	F	Connection cable (1 m)
905409	F	Connection cable (2 m)
06AFM380F	F	USB Input Tool Direct (2 m)
02AZD790F	F	Connection cable for U-WAVE-T (160 mm)
02AZE140F	F	Connection cable for U-WAVE-T For foot switch
264-622	IP67	U-WAVE-TM
264-623	Buzzer	U-WAVE-TM
02AZD810D	—	U-WAVE-R
264-626	IP67	U-WAVE-TMB
264-627	Buzzer	U-WAVE-TMB
02AZF670	—	U-WAVE-TM/TMB mounting bracket: for Digimatic Indicators

- Lifting
Lifting lever **21EZA198**
Lifting knob **21EZA105**
- Parameter setup kit: **21EZA313**

Note: Parameter setting software (can be downloaded for free from the Mitutoyo website) is also required.




Parameter setup kit




Parameter setting software

- Contact points for Mitutoyo's Digimatic indicators (optional)
Refer to pages 07-63 to 07-68 for details.
- Interchangeable back covers (optional)
Refer to pages 07-69 to 07-70 for details.
- Measuring stands (optional)
Refer to pages 07-97 to 07-103 for details.

DIMENSIONS

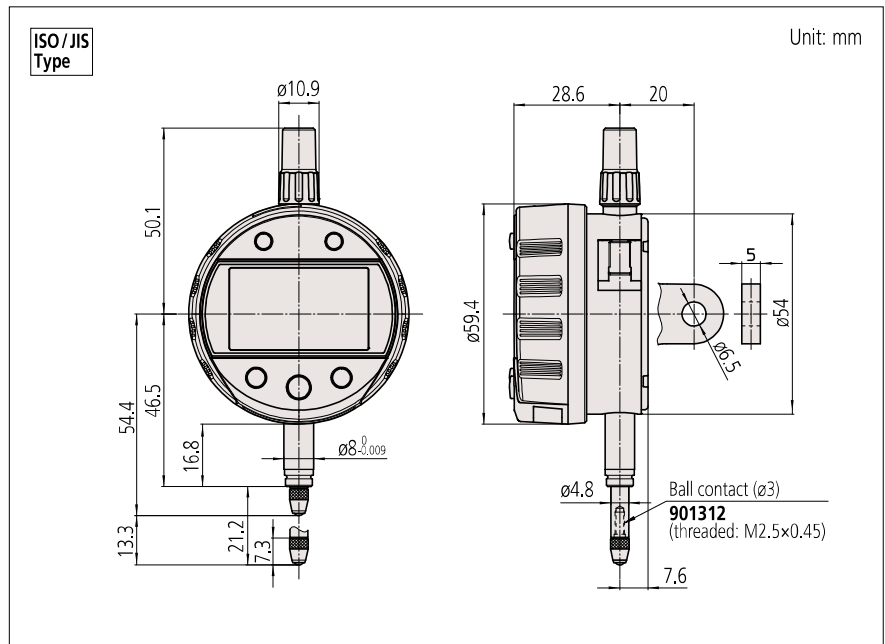

07
Indicators

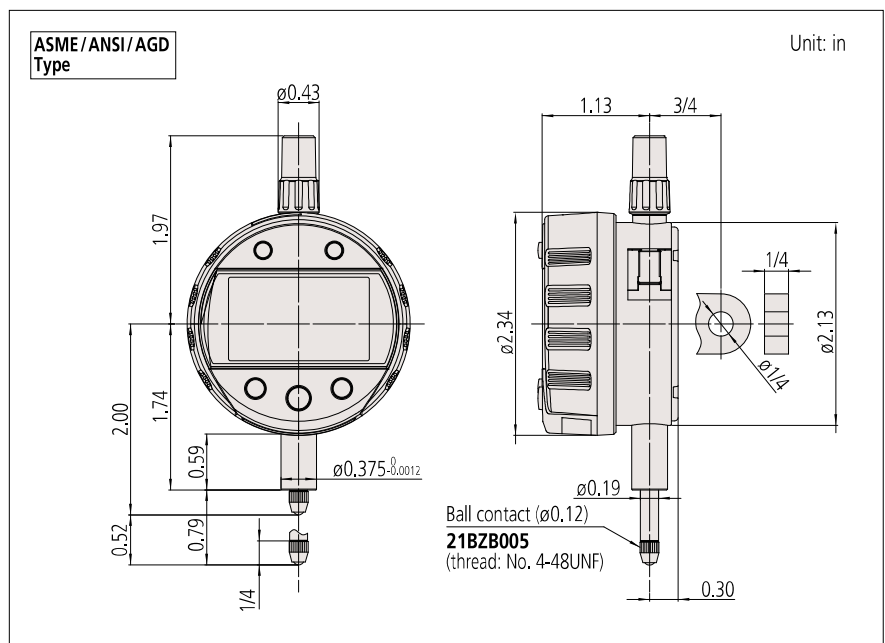

Digital Indicators

Digimatic Indicators

ABSOLUTE Digimatic Indicator ID-CGX SERIES 543 — Bore Gage Type

- Dedicated to inside diameter measurement with minimum-value holding and tolerance judgment functions*. Use together with a Mitutoyo bore gage (refer to pages 08-31 to 08-48 for details).
- Five buttons, status icons, and clear button indications allow easy operation and various functions.
- Wide display and analog bar graph are standard on all models.
- Up to three sets of master values and upper/lower tolerance values can be stored to simplify the master setting.
- By using the parameter setup kit (optional) and the dedicated software, the functions and the parameters can be configured using a computer.

* Tolerance judgment results cannot be output.



543-310B-10

SPECIFICATIONS

Metric		ISO/JIS Type							
Code No.	Range (mm)	Resolution (mm)	Maximum permissible error (MPE)*1 (mm)				Maximum permissible limit (MPL)	Battery life (normal use)*2	Mass (g)
			Partial measuring range P_{MPE}	Total measuring range E_{MPE}	Hysteresis H_{MPE}	Repeatability R_{MPE}	Measuring force (N)		
543-310B-10	12.7	0.001/0.01 (selectable)	0.003	0.003	0.003	0.002	1.5 or less	Approx. 1 year	170

Inch / Metric		ISO/JIS Type							
Code No.	Range	Resolution	Maximum permissible error (MPE)*1 (mm)				Maximum permissible limit (MPL)	Battery life (normal use)*2	Mass (g)
			Partial measuring range P_{MPE}	Total measuring range E_{MPE}	Hysteresis H_{MPE}	Repeatability R_{MPE}	Measuring force (N)		
543-311B-10	0.5 in/12.7 mm	0.00005/0.0001/0.0005 in, 0.001/0.01 mm (selectable)	0.003	0.003	0.003	0.002	1.5 or less	Approx. 1 year	170

Inch / Metric		ASME/ANSI /AGD type							
Code No.	Range	Resolution	Maximum permissible error (MPE)*1 (in)			Maximum permissible limit (MPL)	Battery life (normal use)*2	Mass (g)	
			Overall*3	Hysteresis	Repeatability	Measuring force (N)			
543-312B-10	0.5 in/12.7 mm	0.00005/0.0001/0.0005 in, 0.001/0.01 mm (selectable)	±0.00010	0.00010	0.00010	1.5 or less	Approx. 1 year	170	

- Power source: CR2032 battery (1 pc.), included as standard (for operational checks)

*1 These values apply to normal measurements at 20 °C.

*2 Applies only if not connected to a data processor. Battery life depends on use of the indicator. Use the above value as a guide only.

*3 Overall magnification and linearity

Note: Flat-back type only.

MeasurLinkTM ENABLED
Data Management Software by Mitutoyo

ABSOLUTETM



Example of use with a bore gage (sold separately)



Functions

- Minimum value detection
Note: Peak detection
1) Sampling rate: 50 readings/s
2) Capturing speed: 50 μm/s (max.)
- Preset (3 Preset values can be stored)
- Tolerance judgment
(3 sets of upper and lower limits can be stored)
- Resolution selection
- Analog bar resolution selection
- Key lock
- Display hold (when no external device is connected)
- Data saving/calling
(when no external device is connected)
- Data output
- External PC setting input
- Display rotation (330°)
- Low battery voltage alarm display
- Error alarm display

Optional Accessories

Refer to page 07-13.


- Parameter setup kit (optional)
Refer to page 07-13 for details.

The ABSOLUTE Digimatic Bore Gage




ABSOLUTE Digimatic Bore Gages, which integrate the display with a bore gage measuring unit, are also available. Refer to pages 08-49 and 08-50 for details.

DIMENSIONS

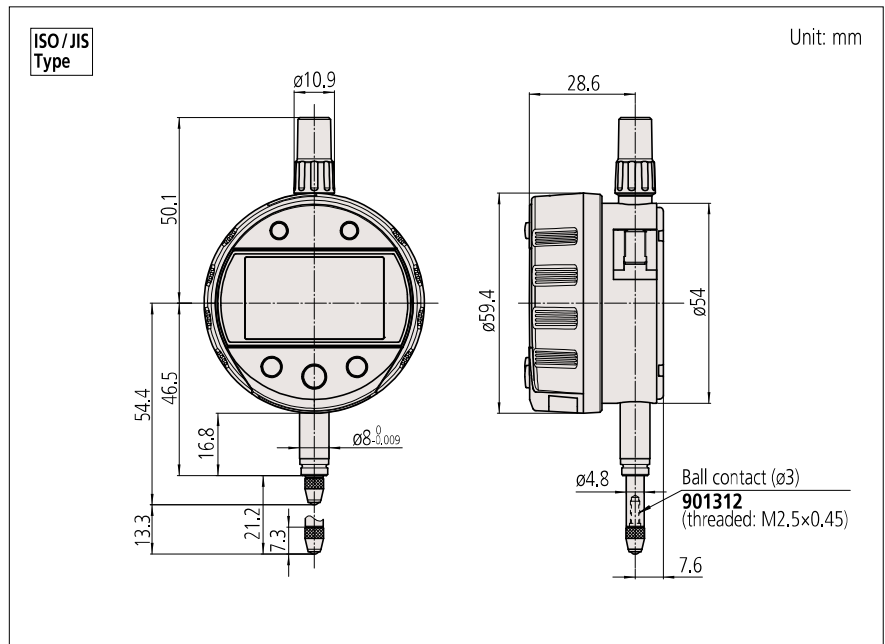

07 Indicators

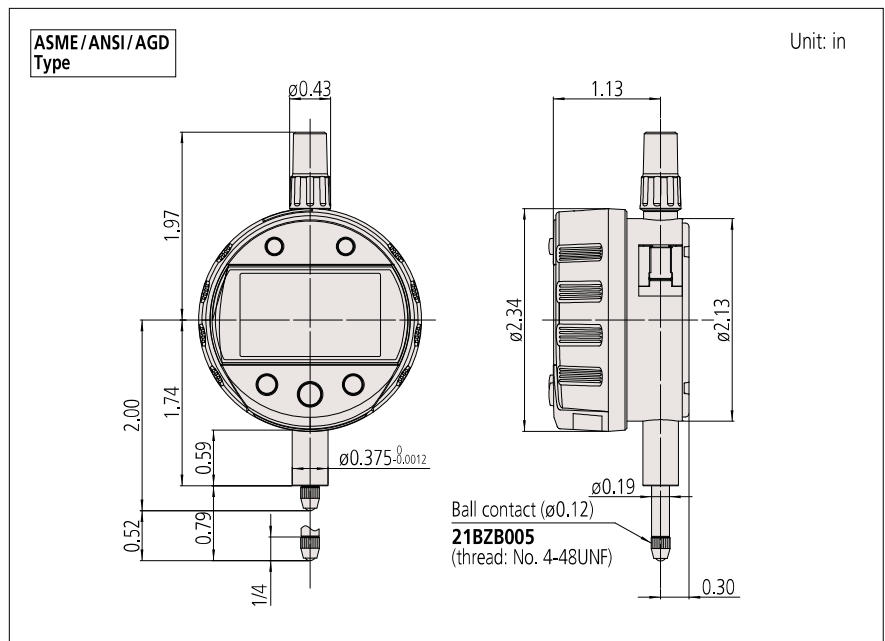

Digital Indicators

Digimatic Indicators

ABSOLUTE Digimatic Indicator ID-CRX SERIES 543 — Calculation Type

- This expandable indicator incorporates an internal calculation function that operates from plunger displacement. Using dedicated fixtures and setting the calculation coefficients, you can read your measurements directly without the need for conversions.
- By using the parameter setup kit (optional) and the dedicated software, the functions and the parameters can be configured using a computer.
- Five buttons, status icons, and clear button indications allow easy operation and various functions.



543-342B-10

SPECIFICATIONS

Metric		ISO/JIS Type							
Code No.	Range (mm)	Resolution (selectable)	Maximum permissible error (MPE)*1*2 (mm)				Maximum permissible limit (MPL)	Battery life (normal use)*4	Mass (g)
			Partial measuring range P_{MPE}	Total measuring range E_{MPE}	Hysteresis H_{MPE}	Repeatability R_{MPE}	Measuring force (N)		
543-340B-10	12.7	12 steps*4	0.003	0.003	0.003	0.002	1.5 or less	Approx. 1 year	170
543-590B-10	25.4						1.8 or less*3		190
543-595B-10	50.8		0.006	0.006			2.3 or less*3		260

Inch / Metric		ISO/JIS Type							
Code No.	Range	Resolution (selectable)	Maximum permissible error (MPE)*1*2 (mm)				Maximum permissible limit (MPL)	Battery life (normal use)*4	Mass (g)
			Partial measuring range P_{MPE}	Total measuring range E_{MPE}	Hysteresis H_{MPE}	Repeatability R_{MPE}	Measuring force (N)		
543-341B-10	0.5 in / 12.7 mm	12 steps*4	0.003	0.003	0.003	0.002	1.5 or less	Approx. 1 year	170
543-591B-10	1 in / 25.4 mm						1.8 or less*3		190
543-596B-10	2 in / 50.8 mm		0.006	0.006			2.3 or less*3		260

Inch / Metric		ASME/ANSI /AGD type						
Code No.	Range	Resolution (selectable)	Maximum permissible error (MPE)*1*2 (in)			Maximum permissible limit (MPL)	Battery life (normal use)*4	Mass (g)
			Overall*5	Hysteresis	Repeatability	Measuring force (N)		
543-342B-10	0.5 in/12.7 mm	12 steps*4	±0.00010	0.00010	0.00010	1.5 or less	Approx. 1 year	170
543-592B-10	1 in/25.4 mm					1.8 or less*3		190
543-597B-10	2 in/50.8 mm		±0.00025			2.3 or less*3		260

• Power source: CR2032 battery (1 pc.), included as standard (for operational checks)

*1 These values apply to normal measurements at 20 °C.

*2 Valid for resolution set to 0.001 mm/0.00005 in and coefficients A=1, B=0 and C=0.

*3 Applies for a spindle orientation between the spindle pointing vertically downward to the spindle horizontal.

*4 Applies only if not connected to a data processor. Battery life depends on use of the indicator. Use the above value as a guide only.

*5 Overall magnification and linearity

Note: Flat-back type only.

MeasurLink[™] ENABLED
Data Management Software by Mitutoyo

ABSOLUTE[™]



Typical application



Functions

- Calculation $f(x') = Ax' + B + Cx'^{-1}$
($x' = x + \text{offset}$)

- Peak detection (MAX/MIN)

- Runout (MAX - MIN) Hold

Note: Peak detection

1) Sampling rate: 10 readings/s

2) Capturing speed: 10 $\mu\text{m/s}$ (max.)

Settings can be changed to:

1) Sampling rate: 50 readings/s

2) Capturing speed: 50 $\mu\text{m/s}$ (max.)

- Zero-setting (INC system)

- Preset (ABS system)

- Tolerance judgment

(3 pairs of ABS, INC memory function)

- Analog bar resolution selectable

- Key lock

- Display hold (when no external device is connected)

- Data output

- External PC setting input

- Display rotation (330°)

- Low battery voltage alarm display

- Error alarm display

- Resolution switching*

Resolution (mm)			Resolution (in)		
0.0002	0.005	0.1	0.00001	0.0002	0.005
0.0005	0.01	0.2	0.00002	0.0005	0.01
0.001	0.02	0.5	0.00005	0.001	0.02
0.002	0.05	1	0.0001	0.002	0.05

* Since the calculation resolution is one micrometer (0.001 mm), using sub-micrometer resolution settings may result in the 4th-place digit being unreliable, particularly when B is set to a very low value and C=0. It does not change at all with certain combinations of calculation coefficient (for example, A=1, B=C=0). The 3rd-place digit representing micrometers (if displayed) is always reliable.

Optional Accessories

Refer to page 07-13.

- Lifting

Lifting lever **21EZA198** (12.7 mm/0.5 inch type)

Lifting knob **21EZA105** (12.7 mm/0.5 inch type)



21EZA197 (25.4 mm/1 inch type)

21EZA200 (50.8 mm/2 inch type)

- Parameter setup kit (optional)

Refer to page 07-13 for details.

DIMENSIONS

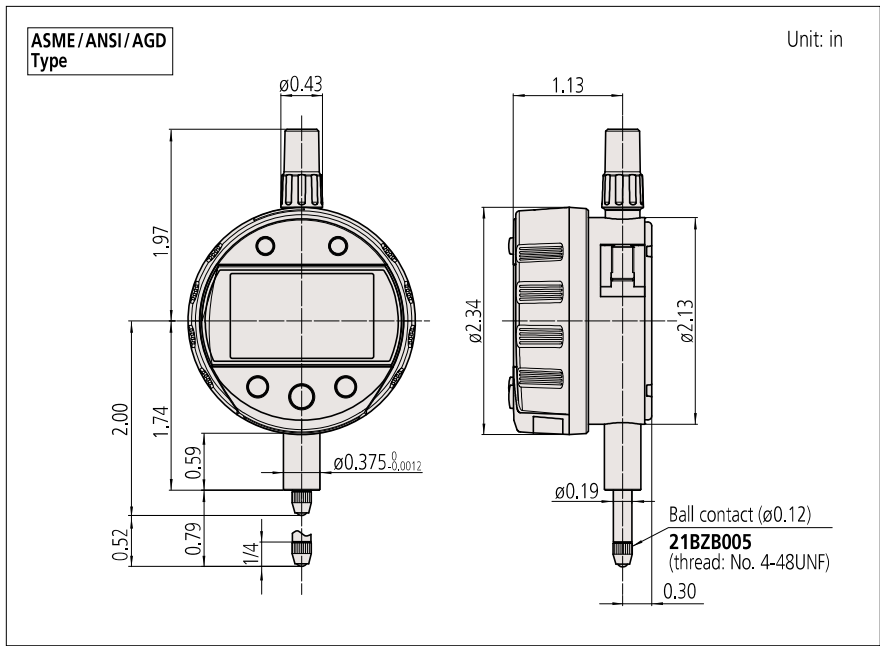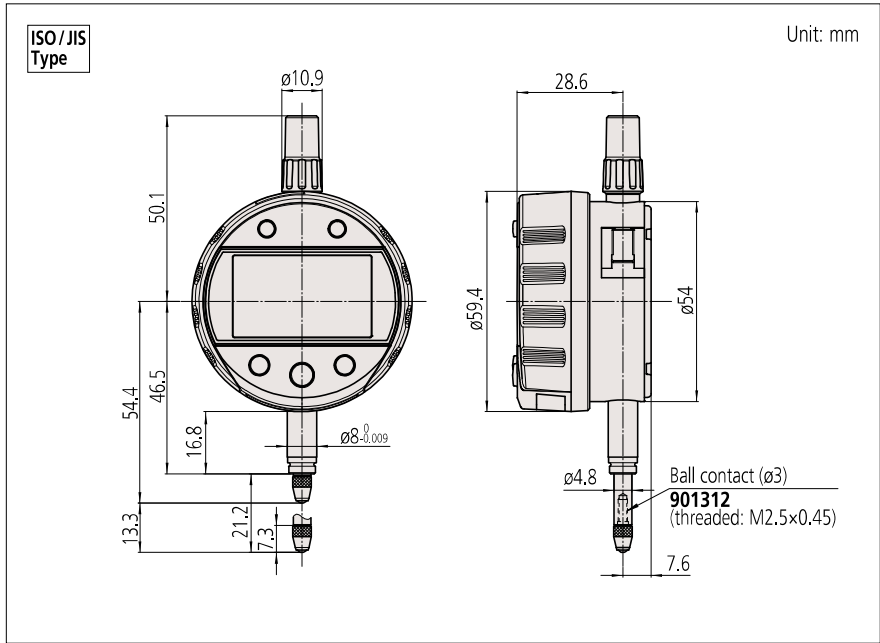

Digimatic Indicators

Examples of measuring various features


Item		D=Countersink diameter/Groove width; H=Countersink depth/Groove depth			
Fixture type*1					
Contact point		Cone	Ball	Cone	
Measuring method x: Spindle displacement					
Calculation		D=Ax	D=Ax+B	H=Ax+B	D=Ax
Coefficient values	A	$-2 \tan \frac{\theta}{2}$	$-2 \tan \frac{\theta}{2}$	-1	$-2 \tan \frac{\theta}{2}$
	B	0	$2r \left(\frac{1}{\cos \frac{\theta}{2}} - \tan \frac{\theta}{2} \right)$	$r \left(\frac{1}{\sin \frac{\theta}{2}} - 1 \right) - \frac{d}{2 \tan \frac{\theta}{2}}$	0
	C	0	0	0	0
Origin offset value (function ON/OFF)		d 0 (OFF)	0 (OFF)	0 (OFF)	0 (OFF)
ORIGIN-set position (x=0 position)					
Displayed measurement value at ORIGIN-set position (Value displayed when x=0)		0	Value of coefficient B	0	0

Item		R=Outside radius of round object	R=Inside radius of round object	R=Outside radius of round object
Fixture type*1				
Contact point		—		
Measuring method x: Spindle displacement				
Calculation		R=Ax	R=Ax+B+Cx ⁻¹	R=A(x+d)+B+C(x+d) ⁻¹
Coefficient values	A	$-\frac{\sin \frac{\theta}{2}}{1 - \sin \frac{\theta}{2}}$	$\frac{1}{2}$	$-\frac{1}{2}$
	B	0	-r	r
	C	0	$\frac{l^2}{2}$	$-\frac{l^2}{2}$
Origin offset value (function ON/OFF)		d 0 (OFF)	0 (OFF)	0 (OFF)
ORIGIN-set position (x=0 position)				
Displayed measurement value at ORIGIN-set position (Value displayed when x=0)		0	Err 30*2 (Overflow error of Display value)	Depends on value of d

*1 A dedicated fixture for a workpiece can be made to order.

*2 The error is cleared when the measured value returns to the displayable range as a result of moving the spindle.

Typical applications

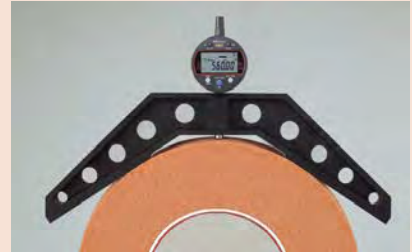

Functions

- Signal output
(-NG/OK/+NG, N-ch open drain, logical invert is available)
- Remote control (peak start preset/zero-set)
- Peak detection (MAX/MIN)
- Runout range measurement (MAX - MIN)
- Zero-setting (INC system)
- Presetting (ABS system)
- Measuring direction switching
- Tolerance judgment (3 pairs of ABS, INC memory function)
- Resolution switching
- Simple calculation: $f(x) = Ax$
- Key lock
- Calibration mode (Signal output in Digimatic code format)
- Error alarm display

Optional Accessories

- Lifting*
Lifting lever **21EZA198**
Lifting knob **21EZA105**
 - * Dust-water protection is not guaranteed.
 - Digimatic power supply unit: **21EZA345**
To denote your AC power cable add the following suffixes to the code No.: **A** for UL/CSA, **D** for CEE, **DC** for CCC, **E** for KC. **No suffix** is required for JIS/100VAC.
Used in the calibration mode when executing automatic inspection using i-Checker **IC2000**.
In such a case, purchase connection cable **21EAA194** (1 m), or **21EAA190** (2 m).
- Note: It can't be used as a power source when using in the normal mode.
- Contact points for Mitutoyo's Digimatic indicators (optional)
Refer to pages 07-63 to 07-68 for details.
 - Interchangeable back covers (optional)
Refer to pages 07-69 to 07-70 for details.

Output signals and display

Wire	- NG	OK	+ NG	ABS data composition error
Orange (- NG)	Low	High	High	High
Green (OK)	High	Low	High	High
Brown (+ NG)	High	High	Low	High
LED	Red	Green	Red	Red flashing
Display	◀	○	▶	"x.xx" indication


Note: Logical invert is available.

I/O Specifications


Wire	Signal	I/O	Description
Black	- V (GND)	—	Connected to minus (-) terminal
Red	+ V	—	Power supply (5 to 24 VDC)
Orange	- NG	O	Tolerance judgment result output: Only the terminal corresponding to a judgment result is set to the low level.
Green	OK	O	
Brown	+ NG	O	
Yellow	PRESET_RECALL ZERO	I	External input terminal: If the relevant terminal is set to the low level, its signal becomes true.
Blue	PEAK_START	I	
Shield	FG	—	Connected to GND (Earth)

Note: Measurement data cannot be output.

Output

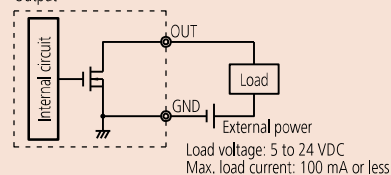

Input



ABSOLUTE Digimatic Indicator ID-CJX SERIES 543 — Signal Output Function Type

- Enables the GO/NG judgment result to be output to external equipment. Output is enabled by directly connecting to an external device such as a sequencer, contributing to automation of measurement processes. It also supports logical invert of signal output.
- The GO/NG judgment result is also indicated by the green/red LED and the signs on display.
- A peak detection function is equipped for measuring and judging peak values such as runout.
- The ABS (ABSOLUTE) scale restores the last origin position* automatically when the indicator is turned on, and realizes high reliability by eliminating over-speed errors.

* Refer to "Precautions for use" on page 07-2.



543-350-10

SPECIFICATIONS

Metric		ISO/JIS Type					
Code No.	Range (mm)	Resolution (mm)	Maximum permissible error (MPE)*1 (mm)				Mass (g)
			Partial measuring range P_{MPE}	Total measuring range E_{MPE}	Hysteresis H_{MPE}	Repeatability R_{MPE}	
543-350-10	12.7	0.001/0.01 (selectable)	0.003	0.003	0.003	0.002	295
543-350B-10 (flat back)							285

Inch/Metric		ISO/JIS Type					
Code No.	Range	Resolution	Maximum permissible error (MPE)*1 (mm)				Mass (g)
			Partial measuring range P_{MPE}	Total measuring range E_{MPE}	Hysteresis H_{MPE}	Repeatability R_{MPE}	
543-351-10	0.5 in / 12.7 mm	0.00005 / 0.0001 / 0.0005 in, 0.001 / 0.01 mm (selectable)	0.003	0.003	0.003	0.002	295
543-351B-10 (flat back)							285

Inch/Metric		ASME/ANSI/AGD type				
Code No.	Range	Resolution	Maximum permissible error (MPE)*1 (in)			Mass (g)
			Overall*2	Hysteresis	Repeatability	
543-352-10	0.5 in / 12.7 mm	0.00005 / 0.0001 / 0.0005 in, 0.001 / 0.01 mm (selectable)	±0.00010	0.00010	0.00010	295
543-352B-10 (flat back)						285

*1 These values apply to normal measurements at 20 °C.

*2 Overall magnification and linearity

Note 1: Display readout does not rotate.



Note 2: MAX/MIN holding: sample rate is 100 readings/s; max. rate of change of reading is 100 μm/s or less.

Note 3: Standard contact point: **901312** (ISO/JIS type), **21BZB005** (ANSI/AGD type)

Digimatic Indicators

ABSOLUTE Digimatic Indicator ID-CJX SERIES 543 — Signal Output Function Type

DIMENSIONS

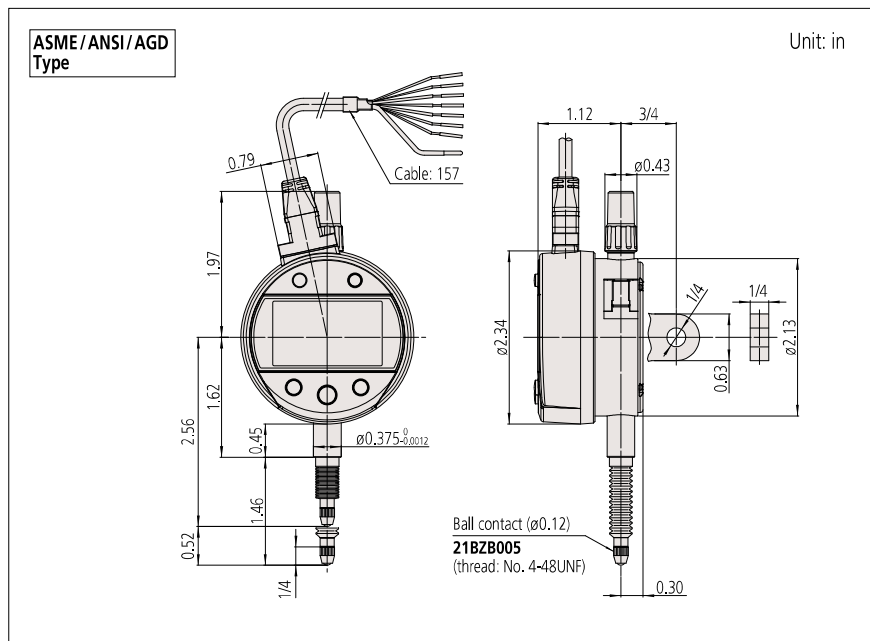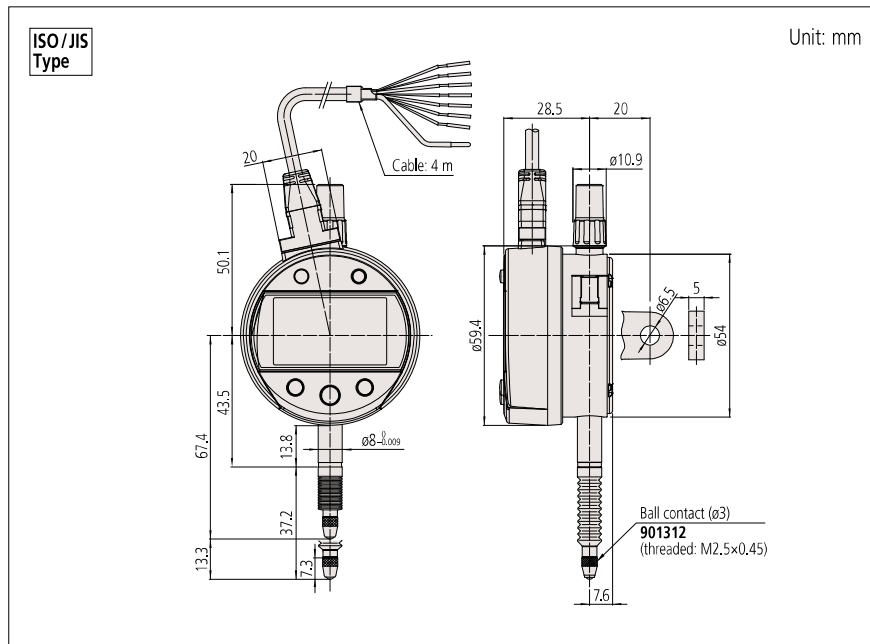

Application example using comparator stand



Comparator stand
215-505-10

Optional Accessories

Code No.	Type	Description
264-020	—	USB Input Tool Series USB Keyboard Signal Conversion Type IT-020U
936937	D	Connection cable (1 m)
965014	D	Connection cable (2 m)
06AFM380D	D	USB Input Tool Direct (2 m)
02AZD730G	IP67	U-WAVE-T
02AZD880G	Buzzer	U-WAVE-T
02AZD790D	D	Connection cable for U-WAVE-T (160 mm)
02AZE140D	D	Connection cable for U-WAVE-T For foot switch
02AZD810D	—	U-WAVE-R
02AZE200	—	U-WAVE-T mounting bracket

- Remote controller: **21EZA099**
- Lifting cable: **21JZA295** (stroke 30 mm)
- With auto-stop function:
21JZA301 (overall length 300 mm)
- Lifting knob: **21EZA101**



Lifting knob

- RS-232C Connection cable (2 m): **21EAA131**
- Lug-on-center back:
101040 (ISO/JIS type)
101306 (ASME/ANSI/AGD type)
- Contact points for Mitutoyo's Digimatic indicators (optional)
Refer to pages 07-63 to 07-68 for details.
- Granite comparator stands (optional)
Refer to page 07-101 for details.
- Comparator stands (optional)
Refer to page 07-102 for details.

Digimatic Indicator ID-H SERIES 543 — High Accuracy and High Functionality Type

- This digital indicator offers the excellent accuracy, functionality and high resolution expected with top-of-the-line indicators.
- Take advantage of its high accuracy backed up by 0.5 μ m resolution, remote control functionality via a handheld controller (or an RS-232C interface) and easy runout measurements with the well-established analog bar display.
- The maximum, minimum, or runout value (MAX - MIN) can be measured.
- An advanced, remote control system can be implemented with the built-in RS-232C interface and a PC.
- With the optional remote controller, operations such as zero-setting and presetting can be made without touching the indicator body, thereby enabling more stable and high accuracy measurement.



Remote controller (optional)



543-563

SPECIFICATIONS

Metric

		ISO/JIS Type						
Code No.*2	Range (mm)	Resolution (mm)	Maximum permissible error (MPE)*1 (mm)				Maximum permissible limit (MPL)	Mass (g)
			Partial measuring range P_{MPE}	Total measuring range E_{MPE}	Hysteresis H_{MPE}	Repeatability R_{MPE}	Measuring force (N)	
543-561	30.48	0.0005/ 0.001 (selectable)	0.0015	0.0015	0.0015	0.001	2.0 or less	290
543-563	60.96		0.0025	0.0025	0.0025		2.5 or less	305

Inch / Metric

		ASME/ANSI/AGD Type						
Code No.*2	Range	Resolution	Maximum permissible error (MPE)*1 (in)			Maximum permissible limit (MPL)	Mass (g)	
			Overall*3	Hysteresis	Repeatability	Measuring force (N)		
543-562	1.2 in/ 30.48 mm	0.00002/ 0.00005/ 0.0001 in, 0.0005/ 0.001 mm (selectable)	±0.00006	0.00006	0.00004	2.0 or less	300	
543-564	2.4 in/ 60.96 mm		±0.00010	0.00010		2.5 or less		

- Display: 7-digit display, sign, and analog bar with 2-color backlight
- Power source: 5.9 V DC (via AC adapter) **06AGZ369***

* To denote your AC power cable add the following suffixes to the code No.: **JA** for UL/CSA and PSE, **D** for CEE, **DC** for CCC, **E** for BS, **K** for KC

- Position detection method: Photoelectric-type reflection linear encoder
- Response speed: Approx. 1000 mm/s
- Lifting lever: **21EAA426** (standard accessory)

*1 These values apply to normal measurements at 20 °C.

*2 To denote your AC power cable add the following suffixes to the code No.: **A** for UL/CSA, **D** for CEE, **DC** for CCC, **E** for BS, **K** for KC, **No suffix** is required for JIS/100 V

*3 Overall magnification and linearity

Note 1: The indicator can output SPC (Digimatic) data consisting of up to 6 digits in full. If the data consists of 7 digits the first digit is not output (example: 123.4565 mm is output as 23.4565 mm).

Note 2: Regarding origin setting, refer to "Precautions for use" on page 07-2.

Note 3: The orientation for use can be from vertical (contact point pointing downward) to horizontal (spindle in horizontal orientation).


Digimatic Indicators

Digimatic Indicator ID-H SERIES 543 — High Accuracy and High Functionality Type

DIMENSIONS

ISO/JIS
Type


Unit: mm

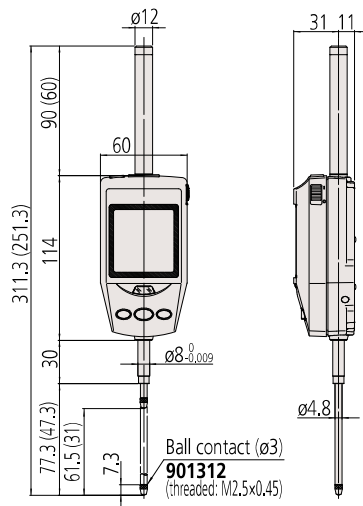

Note: () = 543-561

ASME/ANSI/AGD
Type

Unit: in

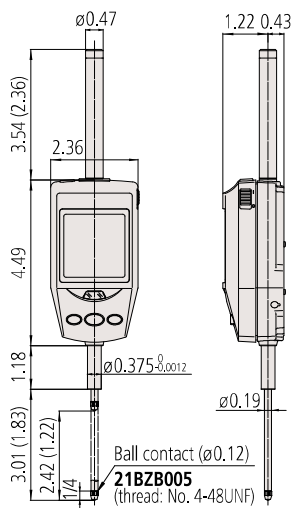

Note: () = 543-562

Functions

- Preset
- Tolerance judgment (3 steps)

EC Counter SERIES 542 — Low-cost, Modular Type Display Unit

- The counter can be connected to a gage that has a data output function, such as a Digimatic indicator or linear gage.
- 3 sets of limiting values can be displayed and output.
- Compact size (DIN 96×48 mm)




542-007

07
Indicators

SPECIFICATIONS

Code No.	542-007*
Resolution () indicates maximum display range	0.01 mm (± 9999.99)/0.0005 in (± 99.9995 in)/0.001 in (± 999.999 in) 0.001 mm (± 9999.999)/0.00005 in (± 9.99995 in)/0.0001 in (± 99.999 in) [automatic setting by gage]
Tolerance judgment display	LED display (3 steps: Amber, Green, Red)
External output (switching type)	Tolerance judgment output Data output
Control input	External PRESET, external HOLD
Operating temperature	0 to 40 °C (RH 20 to 80%, no condensation)
Storage temperature	-10 to 50 °C (RH 20 to 80%, no condensation)
External dimensions	96 (W) × 48 (H) × 84.6 (D) mm
Power Source	AC adapter: 12BAR954 AC cable: 12BAK729 (Japan), 12BAK730 (U.S.), 12BAK731 (EU), 12BAK734 (UK), 12BAK732 (China), 12BAK733 (Korea)
Standard Accessories	AC adapter, AC cable, rubber feet
Mass	500 g

DIMENSIONS

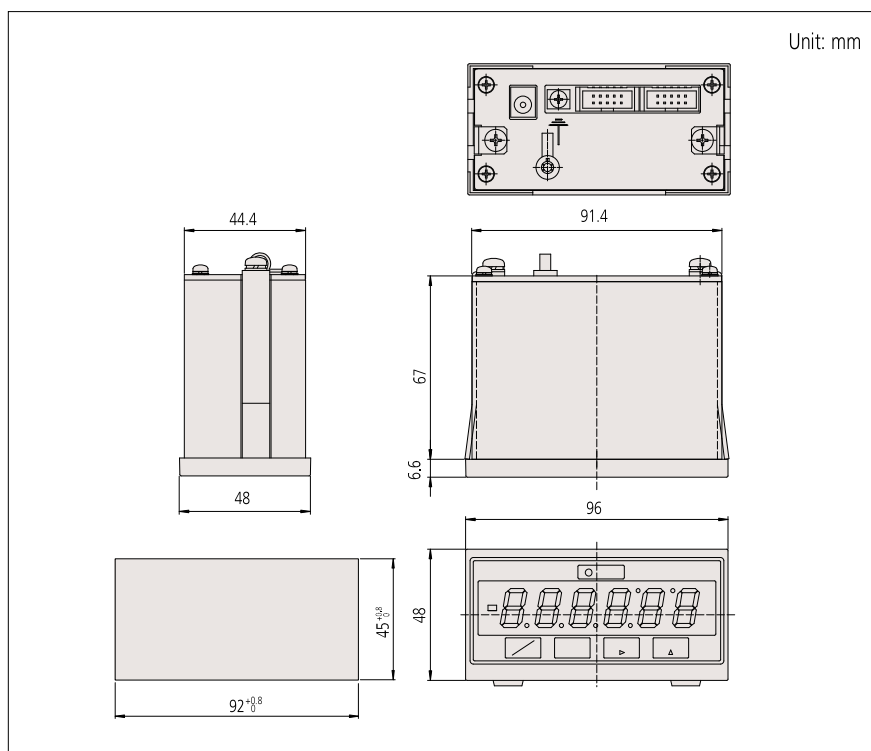

Display Unit

Dial Indicators

Dial Indicators

Mitutoyo dial indicators have long been used by many of our customers. In full recognition of their needs, we have devoted ourselves to the research and development necessary to produce high-quality and high-accuracy dial indicators. Due to the recent re-acknowledgement of the importance of measurement technologies, the demands on dial indicators are many and varied: installation in measuring jigs, mounting in countless types of precision equipment, etc. We offer numerous models with various types of dial faces, measuring ranges, graduation styles and environmental resistance ratings. The stems, which ensure the fixture reliability, and the spindles, which are the basis of accuracy, have excellent resistance against harsh use thanks to the hardened stainless steel construction. 0.01 mm resolution dial indicators have a main gear made of stainless steel with high resistance to wear and deformation. 0.001 mm graduation dial indicators employ a sector gear made of a special alloy in order to further increase the resistance to wear. Many models employ an O-ring to ensure airtightness between the outer frame and the bezel in order to prevent water or oil penetration from the front. Mitutoyo's dial indicators are manufactured and inspected according to JIS B 7503:2017. (Inspection orientation: vertical)

Important factors in choosing a dial indicator: the size (bezel diameter), resolution (graduation) and measuring range. Use the table on the right to help choose a suitable model for your application.


FEATURES: A Series (SERIES 2, 3, 4)



- No through screw-holes on the frame for high oil- and dust-resistance. The bezel clamp (optional) can be attached either to the right or left side.
- Improved impact- and oil-resistant materials are employed in the bezel. Easier reading is due to the improved shape of the crystal face.



- The spindle lifting lever (optional: **21EZA198**) can be attached to either the right or left side providing high operability and smooth movement. This lever can be easily installed and removed.

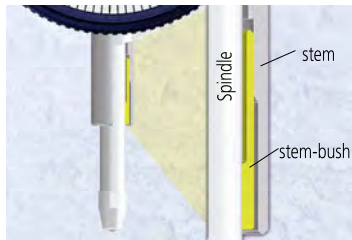

- Revolutionary stem-bush design for trouble-free stem clamping (longer clamping range; maximum tightening torque at the clamping point with M5 screw: 150 N·cm).



- The optional limit hands (1) can be moved without interfering with the optional bezel clamp (2).


- Application of anti-stain and anti-reflective coating improves scale visibility.



<Conventional model>



<New model>

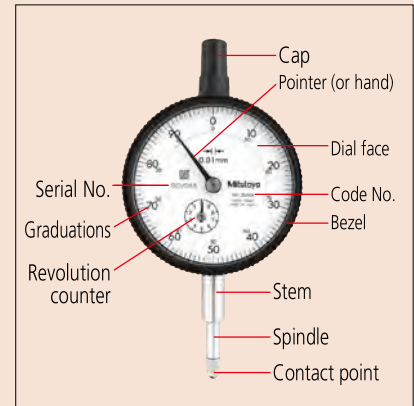

Parts of a dial indicator

Feature icons

Icon	Feature description
	Continuous scale
	Balanced scale
	Reverse reading type, Suitable for depth and step measurement.
	One revolution type for easy and error-free reading
	Double scale spacing type, easy-on-the-eyes
	Shockproof
	Waterproof (IP63)
	Waterproof (IP64)
	With damper at top rest point
	With damper at lowest rest point
	Jeweled bearing
	Peak retaining
	Dustproof
	With coaxial revolution counter
	Back Plunger
	Adjustable hand

Note: Mitutoyo produces ASME-compatible products. Contact us for details.

**SERIES 2 — Standard Type, 0.01 mm Graduation**

- This model is the most popular Mitutoyo indicator with excellent accuracy and durability. Standard 0.01 mm graduation dial indicators have a bezel with an outside diameter of 57 mm.
- The indicator is highly durable thanks to its oil- and water-tight design, quenched hardened stainless-steel, carbide contact point, and a grand gear made of wear- and deformation-resistant material.
- Application of an anti-reflective and hard surface coating improves scale visibility along with scratch and chemical resistance.

**2046A**07
Indicators**SPECIFICATIONS**

Metric										ISO/JIS type	
Code No.		Graduation (mm)	Range (range/rev) (mm)	Maximum permissible error (MPE) (μm)						Dial reading	Measuring force (N)
w/lug	Flat-back			Indication error				Hysteresis	Repeat-ability		
				1/10 Rev	1/2 Rev	1 Rev	Measuring range				
2046A	2046AB	0.01	10 (1)	5	9	10	13	3	3	±0-100	1.4 or less
2046A-09	2046AB-09	0.01	10 (1)	5	9	10	15	3	3	±0-100	1.4 or less
2047A	2047AB	0.01	10 (1)	5	9	10	13	3	3	0-50-0	1.4 or less
2902A	2902AB	0.01	10 (1)	5	9	10	13	3	3	100-0	1.4 or less
2310A-10	2310AB-10	0.01	10 (1)	5	9	10	15	3	3	±0-100	1.4 or less
2044A	2044AB	0.01	5 (1)	5	9	10	12	3	3	±0-100	1.4 or less
2044A-09	2044AB-09	0.01	5 (1)	5	9	10	12	3	3	±0-100	1.4 or less
2045A	2045AB	0.01	5 (1)	5	9	10	12	3	3	0-50-0	1.4 or less


Note: Completed products inspection is performed in the vertical orientation (contact point downward) and the stated accuracy is guaranteed.

DIMENSIONS

Code No.	A	B	C	D	E	F	G	H	I	Mass (g)	
										w/lug	Flat-back
2046A	47.2	65.2	57	18.1	20	16.9	19.8	52	7.6	144	135
2046A-09	47.2	65.2	57	18.1	20	16.9	19.8	52	7.6	146	137
2047A	47.2	65.2	57	18.1	20	16.9	19.8	52	7.6	144	135
2902A	47.2	65.2	57	18.1	20	16.9	19.8	52	7.6	144	135
2310A-10	47.2	65.2	57	18.1	20	16.9	19.8	52	7.6	146	137
2044A	47.2	65.2	57	18.1	20	16.9	19.8	52	7.6	145	136
2044A-09	47.2	65.2	57	18.1	20	16.9	19.8	52	7.6	147	138
2045A	47.2	65.2	57	18.1	20	16.9	19.8	52	7.6	145	136

Note: Refer to pages 07-63 to 07-68 for details of contact points.

Unit: mm

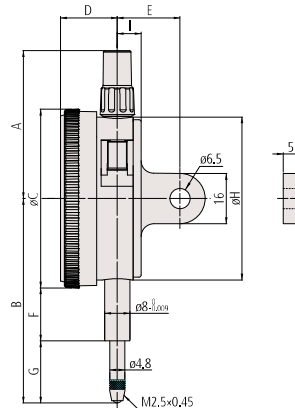ISO/JIS
Type

Dial Indicators

Dial Indicators

SERIES 2 — Standard Type, 0.01 mm Graduation



Continuous scale



Graduation: 0.01 mm,
Measuring range: 10 mm

2046A

With damper at
top rest point

2046A-09

Shockproof



Balanced scale



Graduation: 0.01 mm,
Measuring range: 10 mm

2047A

With damper at
top rest point



Reverse reading type. Suitable
for depth and step measurement.



Graduation: 0.01 mm,
Measuring range: 10 mm

2902A

With damper at
top rest point



Continuous scale



Graduation: 0.01 mm,
Measuring range: 10 mm

2310A-10

With coaxial
revolution counter

Jeweled bearing



Continuous scale



Graduation: 0.01 mm,
Measuring range: 5 mm

2044A

With damper at
top rest point

2044A-09

With damper at
top rest point

Shockproof



Balanced scale



Graduation: 0.01 mm,
Measuring range: 5 mm

2045A

With damper at
top rest point

Optional Accessories

- Limit hand (2 pcs.): **21AZB195**



- Bezel clamp: **21AZB148**



07

Indicators

Dial Indicators

FEATURES

Metric		ISO/JIS type							
Code No.	Flat-back								
2046A	2046AB	✓					✓		
2046A-09	2046AB-09	✓			✓				
2047A	2047AB		✓				✓		
2902A	2902AB			✓			✓		
2310A-10	2310AB-10	✓				✓		✓	✓
2044A	2044AB	✓					✓		
2044A-09	2044AB-09	✓		✓					
2045A	2045AB		✓				✓		

**SERIES 2 — Standard Type, 0.001 mm & 0.005 mm Graduation**

- Standard 0.001 mm and 0.005 mm graduation dial indicators have a bezel with an outside diameter of 57 mm. These indicators provide excellent accuracy and durability.
- The indicator is highly durable thanks to its oil- and water-tight design, quenched hardened stainless-steel, carbide contact point, and a grand gear made of wear- and deformation-resistant material.
- Application of an anti-reflective and hard surface coating improves scale visibility along with scratch and chemical resistance.
- The indicator uses jeweled bearings, providing excellent indication sensitivity and durability.

**2109A-10**07
Indicators**SPECIFICATIONS****Metric**


□ ISO/JIS type

Code No.		Graduation (mm)	Range (range/rev) (mm)	Maximum permissible error (MPE) (μm)						Dial reading	Measuring force (N)
w/lug	Flat-back			Indication error				Hysteresis	Repeat-ability		
				1/10 Rev	1/2 Rev	1 Rev	Measuring range				
2109A-10	2109AB-10	0.001	1 (0.2)	2	3	4	5	2	0.5	0-100-0	1.5 or less
2110A-10	2110AB-10	0.001	1 (0.1)	2	3	4	5	2	0.5	±0-100	1.8 or less
2113A-10	2113AB-10	0.001	2 (0.2)	2	4	5	7	2	0.5	0-100-0	1.5 or less
2118A-10	2118AB-10	0.001	5 (0.2)	3.5	5	6	10	3	1	0-100-100	1.5 or less
2119A-10	2119AB-10	0.001	5 (0.2)	3.5	5	6	10	3	1	0-100-0	1.5 or less
2124A-10	2124AB-10	0.005	5 (0.5)	5	8	9	12	3	3	±0-50	1.5 or less

Note: Completed products inspection is performed in the vertical orientation (contact point downward) and the stated accuracy is guaranteed.

DIMENSIONS**ISO/JIS Type**

Unit: mm

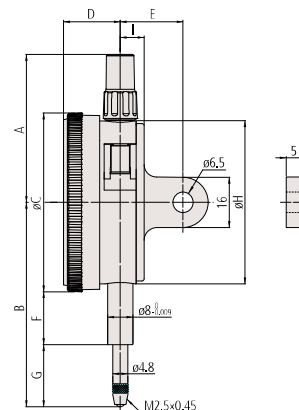

Code No.	A	B	C	D	E	F	G	H	I	Mass (g)	
										w/lug	Flat-back
2109A-10	47.2	60.5	57	18.1	20	16.9	15.1	52	7.6	148	139
2110A-10	47.2	66.5	57	18.1	20	16.9	21.1	52	7.6	149	140
2113A-10	47.2	61	57	18.1	20	16.9	15.6	52	7.6	148	139
2118A-10	47.2	60.7	57	18.1	20	16.9	15.3	52	7.6	146	137
2119A-10	47.2	60.7	57	18.1	20	16.9	15.3	52	7.6	146	137
2124A-10	47.2	60.7	57	18.1	20	16.9	15.3	52	7.6	146	137

Note: Refer to pages 07-63 to 07-68 for details of contact points.

Dial Indicators

Dial Indicators

SERIES 2 — Standard Type, 0.001 mm & 0.005 mm Graduation



Balanced scale



Graduation: 0.001 mm,
Measuring range: 1 mm

2109A-10

Shockproof

Jeweled bearing



Continuous scale



Graduation: 0.001 mm,
Measuring range: 1 mm

2110A-10


Double scale spacing

Shockproof

Jeweled bearing



Balanced scale



Graduation: 0.001 mm,
Measuring range: 2 mm

2113A-10

Shockproof

Jeweled bearing



Continuous scale



Graduation: 0.001 mm,
Measuring range: 5 mm

2118A-10

Jeweled bearing



Balanced scale



Graduation: 0.001 mm,
Measuring range: 5 mm

2119A-10

Jeweled bearing



Continuous scale



Graduation: 0.005 mm,
Measuring range: 5 mm

2124A-10

Jeweled bearing

Optional Accessories

- Limit hand (2 pcs.), Bezel clamp
- Refer to page 07-27 for details.

FEATURES

Metric		ISO/JIS type					
Code No.							
w/lug	Flat-back						
2109A-10	2109AB-10	✓	✓	✓	✓	✓	
2110A-10	2110AB-10	✓	✓	✓	✓	✓	✓
2113A-10	2113AB-10	✓	✓	✓	✓	✓	
2118A-10	2118AB-10	✓				✓	
2119A-10	2119AB-10	✓				✓	
2124A-10	2124AB-10	✓				✓	

SERIES 2 — Water-proof Type, 0.01 mm & 0.001 mm Graduation

- Standard 0.01 mm and 0.001 mm graduation dial indicators have a highly water-resistant bezel with an outside diameter of 57 mm.
- O-rings and rubber bellows are used to prevent water and oil penetration.
- Excellent in accuracy and durability.
- The indicator is highly durable thanks to its oil- and water-tight design, quenched hardened stainless-steel, carbide contact point, and a grand gear made of wear- and deformation-resistant material.
- Application of an anti-reflective and hard surface coating improves scale visibility along with scratch and chemical resistance.



2046A-60

07
Indicators

SPECIFICATIONS

Metric

□ ISO/JIS type


Code No.		Graduation (mm)	Range (range/rev) (mm)	Maximum permissible error (MPE) (μm)						Dial reading	Measuring force (N)
w/lug	Flat-back			Indication error				Hysteresis	Repeat-ability		
				1/10 Rev	1/2 Rev	1 Rev	Measuring range				
2046A-60	2046AB-60	0.01	10 (1)	5	9	10	13	3	3	±0-100	2.5 or less
2044A-60	2044AB-60	0.01	5 (1)	5	9	10	12	3	3	±0-100	2.5 or less
2109A-70	2109AB-70	0.001	1 (0.2)	2	3	4	5	2	0.5	0-100-0	2.0 or less
2110A-70	2110AB-70	0.001	1 (0.1)	2	3	4	5	2	0.5	±0-100	2.0 or less

Note: Completed products inspection is performed in the vertical orientation (contact point downward) and the stated accuracy is guaranteed.

DIMENSIONS

ISO/JIS
Type

Unit: mm

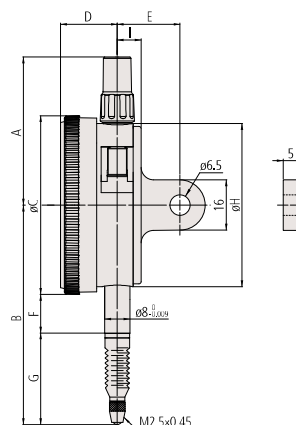

Code No.	A	B	C	D	E	F	G	H	I	Mass (g)	
										w/lug	Flat-back
2046A-60	47.2	74.7	57	18.1	20	12.3	33.9	52	7.6	147	138
2044A-60	47.2	70	57	18.1	20	12.3	29.2	52	7.6	147	138
2109A-70	47.2	65.3	57	18.1	20	12.3	24.5	52	7.6	149	140
2110A-70	47.2	67.5	57	18.1	20	12.3	26.7	52	7.6	150	141

Note: Refer to pages 07-63 to 07-68 for details of contact points.

Dial Indicators

Dial Indicators

SERIES 2 — Water-proof Type, 0.01 mm & 0.001 mm Graduation



Continuous scale



Graduation: 0.01 mm,
Measuring range: 10 mm

2046A-60

- Waterproof
- With damper at top rest point



Continuous scale



Graduation: 0.01 mm,
Measuring range: 5 mm

2044A-60

- Waterproof
- With damper at top rest point



Balanced scale



Graduation: 0.001 mm,
Measuring range: 1 mm

2109A-70

- Waterproof
- Shockproof
- Jeweled bearing



Continuous scale



Graduation: 0.001 mm,
Measuring range: 1 mm

2110A-70

- Waterproof
- Double scale spacing
- Shockproof
- Jeweled bearing

Optional Accessories

- Limit hand (2 pcs.): **21AZB195**



- Bezel clamp: **21AZB148** (for metric type)
21RZA065 (for inch type)



21AZB148

FEATURES

Metric		ISO/JIS type						
Code No.								
2046A-60	2046AB-60	✓			✓	✓		
2044A-60	2044AB-60	✓			✓	✓		
2109A-70	2109AB-70		✓	✓	✓		✓	
2110A-70	2110AB-70	✓		✓	✓		✓	✓



SERIES 2 — Standard Type, Inch Reading

SPECIFICATIONS

Inch		ANSI/AGD type						
Code No.		Graduation (in)	Range (range/rev) (in)	Accuracy (in)		Repeat-ability (in)	Dial reading	Measuring force (N)
w/lug	Flat-back			First 1 Rev/2.5 Rev/10 Rev	Retrace			
2414A	2414AB	0.001	0.5 (0.1)	±0.001/±0.001/±0.001	0.0002	±0.0002	±0-100	1.8 or less
2415A	2415AB	0.001	0.5 (0.1)	±0.001/±0.001/±0.001	0.0002	±0.0002	0-50-0	1.8 or less
2914A	2914AB	0.001	0.5 (0.1)	±0.001/±0.001/±0.001	0.0002	±0.0002	100-0	1.8 or less
2506A	2506AB	0.0005	0.125 (0.05)	±0.0005/±0.0005/—	0.00016	±0.0001	±0-50	1.8 or less
2507A	2507AB	0.0005	0.125 (0.05)	±0.0005/±0.0005/—	0.00016	±0.0001	0-25-0	1.8 or less
2514A	2514AB	0.0005	0.5 (0.05)	±0.0005/±0.0005/±0.0015	0.00016	±0.0001	±0-50	1.8 or less
2922A	2922AB	0.0005	0.125 (0.05)	±0.0005/±0.0005/—	0.00016	±0.0001	0-25-0	1.8 or less
2356A-10	2356AB-10	0.0001	0.25 (0.01)	±0.0002/±0.0002/±0.0003/±0.0004 (First 20rev)/±0.0005 (Over 20rev)	0.0001	±0.00003	0-10	2.0 or less
2358A-10	2358AB-10	0.0001	0.5 (0.01)	±0.0002/±0.0002/±0.0003/±0.0004 (First 20rev)/±0.0008 (Over 20rev)	0.00015	±0.00003	0-10	2.0 or less
2802A-10	2802AB-10	0.0001	0.025 (0.01)	±0.0001/±0.0001/—	0.0001	±0.00003	0-10	2.0 or less
2803A-10	2803AB-10	0.0001	0.025 (0.01)	±0.0001/±0.0001/—	0.0001	±0.00003	0-5-0	2.0 or less
2804A-10	2804AB-10	0.0001	0.05 (0.01)	±0.0001/±0.0001/±0.0002	0.0001	±0.00003	0-10	2.0 or less
2805A-10	2805AB-10	0.0001	0.05 (0.01)	±0.0001/±0.0001/±0.0002	0.0001	±0.00003	0-5-0	2.0 or less
2905A-10	2905AB-10	0.0001	0.05 (0.01)	±0.0001/±0.0001/±0.0002	0.0001	±0.00003	10-0	2.0 or less
2923A-10	2923AB-10	0.0001	0.05 (0.01)	±0.0001/±0.0001/±0.0002	0.0001	±0.00003	0-5-0	2.0 or less

Note: Completed products inspection is performed in the vertical orientation (contact point downward) and the stated accuracy is guaranteed.

FEATURES

Inch							
Code No.		S	R	D	A	B	T
w/lug	Flat-back						
2414A	2414AB			✓		✓	
2415A	2415AB				✓	✓	
2914A	2914AB		✓			✓	
2506A	2506AB			✓		✓	
2507A	2507AB				✓	✓	
2514A	2514AB			✓		✓	
2922A	2922AB				✓	✓	
2356A-10	2356AB-10		✓	✓		✓	
2358A-10	2358AB-10		✓	✓		✓	
2802A-10	2802AB-10	✓		✓	✓		
2803A-10	2803AB-10	✓		✓		✓	
2804A-10	2804AB-10	✓		✓	✓		
2805A-10	2805AB-10	✓				✓	
2905A-10	2905AB-10	✓	✓	✓			
2923A-10	2923AB-10	✓		✓		✓	


Dial Indicators

SERIES 2 — Standard Type, Inch Reading

DIMENSIONS

ANSI/AGD
Type

Unit: in

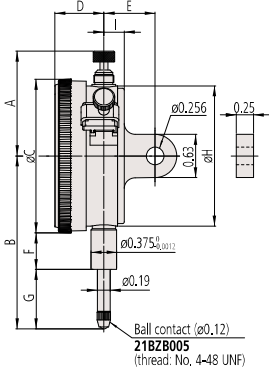

Code No.	A	B	C	D	E	F	G	H	I	Mass (g)	
										w/lug	Flat-back
2414A	1.53	2.52	2.24	0.71	3/4	0.54	0.87	2.05	0.30	164	139
2415A	1.53	2.52	2.24	0.71	3/4	0.54	0.87	2.05	0.30	164	139
2914A	1.53	2.52	2.24	0.71	3/4	0.54	0.87	2.05	0.30	164	139
2506A	1.86	2.14	2.24	0.71	3/4	0.54	0.48	2.05	0.30	164	139
2507A	1.86	2.14	2.24	0.71	3/4	0.54	0.48	2.05	0.30	164	139
2514A	1.53	2.52	2.24	0.71	3/4	0.54	0.87	2.05	0.30	164	139
2922A	1.86	2.14	2.24	0.71	3/4	0.54	0.48	2.05	0.30	164	139
2356A-10	1.86	2.25	2.24	0.71	3/4	0.54	0.59	2.05	0.30	163	138
2358A-10	1.53	2.50	2.24	0.71	3/4	0.54	0.85	2.05	0.30	164	139
2802A-10	1.86	2.02	2.24	0.71	3/4	0.54	0.37	2.05	0.30	164	139
2803A-10	1.86	2.02	2.24	0.71	3/4	0.54	0.37	2.05	0.30	164	139
2804A-10	1.86	2.04	2.24	0.71	3/4	0.54	0.38	2.05	0.30	166	141
2805A-10	1.86	2.04	2.24	0.71	3/4	0.54	0.38	2.05	0.30	166	141
2905A-10	1.86	2.04	2.24	0.71	3/4	0.54	0.38	2.05	0.30	164	139
2923A-10	1.86	2.04	2.24	0.71	3/4	0.54	0.38	2.05	0.30	164	139



SERIES 2 — Standard One Revolution Type for Error-free Reading

One revolution type Back Plunger dial gages are also available. (Refer to pages 07-59 to 07-62 for details.)



2990A-10

- The one revolution dial indicator prevents the possibility of reading errors.
- Mitutoyo's unique shock-proof mechanism is incorporated, providing improved resistance to shock due to sudden spindle retraction caused by impact.
- The indicator is highly durable thanks to its oil- and water-tight design, quenched hardened stainless-steel, carbide contact point, and a grand gear made of wear- and deformation-resistant material.
- Application of an anti-reflective and hard surface coating improves scale visibility along with scratch and chemical resistance.
- The red dead zone in the middle of the dial face is separated from the bezel and doesn't cover the graduations. Therefore, users can always see the range where accuracy is not guaranteed even if the bezel is rotated.



2900A-10

07
Indicators

SPECIFICATIONS

Metric				ISO/JIS type		ANSI/AGD type					
Code No.		Graduation (mm)	Range (range/rev) (mm)	Maximum permissible error (MPE) (μm)						Dial reading	Measuring force (N)
w/lug	Flat-back			Indication error				Hysteresis	Repeat-ability		
				1/10 Rev	1/2 Rev	1 Rev	Measuring range				
2928A	2928AB	0.1	4 (5)	20	—	—	40	20	20	2-0-2	1.4 or less
2929A	2929AB	0.01	0.8 (1)	5	—	—	8	3	3	40-0-40	1.4 or less
2929A-62	2929AB-62	0.01	0.8 (1)	5	—	—	8	3	3	40-0-40	2.0 or less
2959A	2959AB	0.01	1.6 (2)	5	—	—	10	3	3	80-0-80	1.4 or less
2900A-10	2900AB-10	0.001	0.08 (0.1)	2	—	—	3	2	0.5	40-0-40	1.5 or less
2900A-72	2900AB-72	0.001	0.08 (0.1)	2	—	—	3	2	0.5	40-0-40	2.0 or less
2901A-10	2901AB-10	0.001	0.16 (0.2)	2	—	—	4	2	0.5	80-0-80	1.5 or less

Inch		Graduation (in)	Range (range/rev) (in)	Accuracy (in)		Repeat-ability (in)	Dial reading	Measuring force (N)	
w/lug	Flat-back			First 1 Rev/2.5 Rev/10 Rev					Retrace
2909A-62	2909AB-62	0.0005	0.04/0.05	±0.0005/—/—		0.00016	±0.0001	20-0-20	2.5 or less
2910A-10	2910AB-10	0.0001	0.008/0.01	±0.0001/—/—		0.0001	±0.00003	4-0-4	1.8 or less

Note: Completed products inspection is performed in the vertical orientation (contact point downward) and the stated accuracy is guaranteed.

Dial Indicators

Special specifications

Upon request, we can manufacture custom types with changed graduation numbers, graduation lines, dead zones, etc. Please contact your local Mitutoyo Sales Office for more information.


Dial Indicators

SERIES 2 — Standard One Revolution Type for Error-free Reading

DIMENSIONS

ISO / JIS
Type

Unit: mm

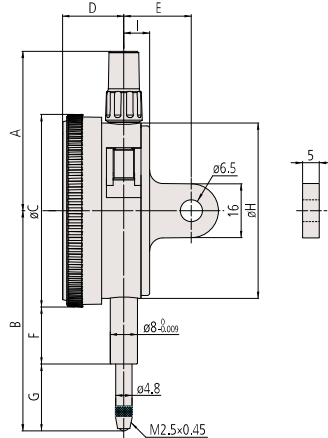


Code No.	A	B	C	D	E	F	G	H	I	Mass (g)	
										w/lug	Flat-back
2928A	47.2	65.2	57	18.1	20	16.9	19.8	52	7.6	145	136
2929A	47.2	65.2	57	18.1	20	16.9	19.8	52	7.6	145	136
2929A-62	47.2	65.2	57	18.1	20	16.9	19.8	52	7.6	145	136
2959A	47.2	65.2	57	18.1	20	16.9	19.8	52	7.6	145	136
2900A-10	47.2	66	57	18.1	20	16.9	20.6	52	7.6	149	140
2900A-72	47.2	66	57	18.1	20	16.9	20.6	52	7.6	149	140
2901A-10	47.2	66.1	57	18.1	20	16.9	20.7	52	7.6	149	140

Note: Refer to pages 07-63 to 07-68 for details of contact points.

ANSI / AGD
Type

Unit: in

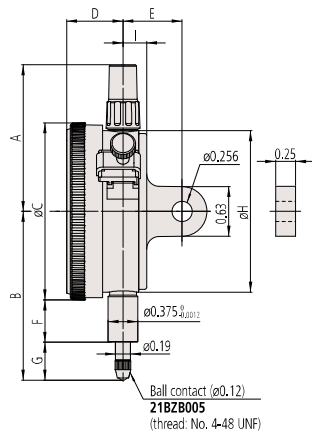

Code No.	A	B	C	D	E	F	G	H	I	Mass (g)	
										w/lug	Flat-back
2909A-62	1.86	2.04	2.24	0.71	3/4	0.54	0.39	2.05	0.30	163	138
2910A-10	1.86	2.02	2.24	0.71	3/4	0.54	0.36	2.05	0.30	164	139

Note: Refer to pages 07-63 to 07-68 for details of contact points.

Optional Accessories

- Limit hand (2 pcs.), Bezel clamp
- Refer to page 07-31 for details.



Balanced scale



Graduation: 0.001 mm,
Measuring range: 0.08 mm

2900A-10

One revolution

Shockproof

Jeweled bearing

2900A-72

One revolution


Shockproof

Dustproof

Jeweled bearing



Balanced scale



Graduation: 0.001 mm,
Measuring range: 0.16 mm

2901A-10

One revolution

Shockproof

Jeweled bearing



Balanced scale



Graduation: 0.1 mm,
Measuring range: 4 mm


2928A

One revolution

Shockproof



Balanced scale



Graduation: 0.01 mm,
Measuring range: 0.8 mm

2929A

One revolution

Shockproof

2929A-62


One revolution

Shockproof

Dustproof



Balanced scale



Graduation: 0.01 mm,
Measuring range: 1.6 mm

2959A

One revolution

Shockproof

FEATURES


Metric ☐ ISO/JIS type ☐ ANSI/AGD type

Code No.		w/lug	Flat-back	10 0 10	10 0 10	60	10 0 10	10 0 10
2928A	2928AB	✓	✓	✓	✓	✓	✓	✓
2929A	2929AB	✓	✓	✓	✓	✓	✓	✓
2929A-62	2929AB-62	✓	✓	✓	✓	✓	✓	✓
2959A	2959AB	✓	✓	✓	✓	✓	✓	✓
2900A-10	2900AB-10	✓	✓	✓	✓	✓	✓	✓
2900A-72	2900AB-72	✓	✓	✓	✓	✓	✓	✓
2901A-10	2901AB-10	✓	✓	✓	✓	✓	✓	✓

Code No.		w/lug	Flat-back	10 0 10	10 0 10	60	10 0 10	10 0 10
2909A-62	2909AB-62	✓	✓	✓	✓	✓	✓	✓
2910A-10	2910AB-10	✓	✓	✓	✓	✓	✓	✓

SERIES 2 — Standard One Revolution Type for Error-free Reading, Water-proof Type

- The one revolution dial indicator with improved water resistance prevents the possibility of reading errors.
- Mitutoyo's unique shock-proof mechanism is incorporated, providing improved resistance to shock due to sudden spindle retraction caused by impact.
- It is highly durable thanks to a hardened stainless-steel stem and spindle, carbide probe, and a large gear made of wear- and deformation-resistant materials.
- Application of an anti-reflective and hard surface coating improves scale visibility along with scratch and chemical resistance.
- The red dead zone in the middle of the dial face is separated from the bezel and doesn't cover the graduations. Therefore, users can always see the range where accuracy is not guaranteed even if the bezel is rotated.

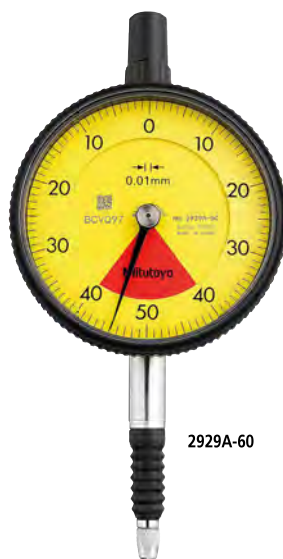

2929A-60

SPECIFICATIONS

Metric		<div><div></div> ISO/JIS type <div></div> ANSI/AGD type</div>									
Code No.		Graduation (mm)	Range (range/rev) (mm)	Maximum permissible error (MPE) (μm)						Dial reading	Measuring force (N)
w/lug	Flat-back			Indication error				Hysteresis	Repeat-ability		
				1/10 Rev	1/2 Rev	1 Rev	Measuring range				
2929A-60	2929AB-60	0.01	0.8 (1)	5	—	—	8	3	3	40-0-40	2.0 or less
2900A-70	2900AB-70	0.001	0.08 (0.1)	2	—	—	3	2	0.5	40-0-40	2.0 or less

Inch											
Code No.		Graduation (in)	Range (range/rev) (in)	Accuracy (in)			Repeat-ability (in)	Dial reading	Measuring force (N)		
w/lug	Flat-back			First 1 Rev/2.5 Rev/10 Rev		Retrace					
2910A-72	2910AB-72	0.0001	0.008/0.01	±0.0001/—/—		0.0001	±0.00003	4-0-4	2.5 or less		

Note: Completed products inspection is performed in the vertical orientation (contact point downward) and the stated accuracy is guaranteed.

Special specifications

Upon request, we can manufacture custom types with changed graduation numbers, graduation lines, dead zones, etc. Please contact your local Mitutoyo Sales Office for more information.


Optional Accessories

- Limit hand (2 pcs.), Bezel clamp
- Refer to page 07-31 for details.

DIMENSIONS

ISO/JIS
Type

Unit: mm

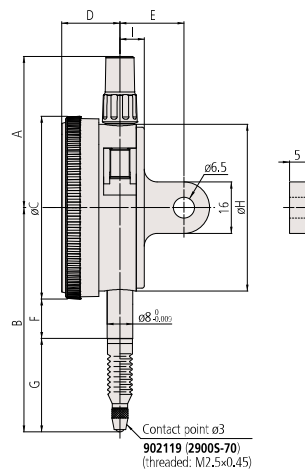


Code No.	A	B	C	D	E	F	G	H	I	Mass (g)	
										w/lug	Flat-back
2929A-60	47.2	70	57	18.1	20	12.3	29.2	52	7.6	146	137
2900A-70	47.2	67	57	18.1	20	12.3	26.2	52	7.6	150	141

Note: Refer to pages 07-63 to 07-68 for details of contact points.

ANSI/AGD
Type

Unit: in

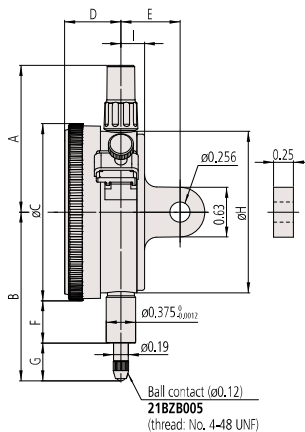


Code No.	A	B	C	D	E	F	G	H	I	Mass (g)	
										w/lug	Flat-back
2910A-72	1.86	2.02	2.24	0.71	3/4	0.54	0.36	2.05	0.30	150	141

Note: Refer to pages 07-63 to 07-68 for details of contact points.


Dial Indicators

SERIES 2 — Standard One Revolution Type for Error-free Reading, Water-proof Type



Graduation: 0.001 mm,
Measuring range: 0.08 mm

One revolution
 Shockproof
 Waterproof
 Jeweled bearing



Graduation: 0.01 mm,
Measuring range: 0.8 mm

One revolution
 Shockproof
 Waterproof

FEATURES

Metric		ISO/JIS type		ANSI/AGD type	
Code No.					
w/lug	Flat-back				
2929A-60	2929AB-60	✓	✓	✓	✓
2900A-70	2900AB-70	✓	✓	✓	✓

Inch		ISO/JIS type		ANSI/AGD type	
Code No.					
w/lug	Flat-back				
2910A-72	2910AB-72	✓	✓	✓	✓



SERIES 2 — Standard One Revolution Type for Error-free Reading, Lightweight Type

- The one revolution dial indicator (lightweight type) prevents the possibility of reading errors.
- Mitutoyo's unique shock-proof mechanism is incorporated, providing improved resistance to shock due to sudden spindle retraction caused by impact.
- Lightweight type (70 g).
- It is highly durable thanks to a hardened stainless-steel stem and spindle, carbide probe, and a large gear made of wear- and deformation-resistant materials.
- Application of an anti-reflective and hard surface coating improves scale visibility along with scratch and chemical resistance.
- The red dead zone in the middle of the dial face is separated from the bezel and doesn't cover the graduations. Therefore, users can always see the range where accuracy is not guaranteed even if the bezel is rotated.



SPECIFICATIONS

Metric		<div><div></div> ISO/JIS type <div></div> ANSI/AGD type</div>									
Code No.		Graduation (mm)	Range (range/rev) (mm)	Maximum permissible error (MPE) (μm)						Dial reading	Measuring force (N)
w/lug	Flat-back			Indication error				Hysteresis	Repeat-ability		
				1/10 Rev	1/2 Rev	1 Rev	Measuring range				
—	2971AB	0.01	0.5 (0.7)	5	—	—	8	3	3	25-0-25	1.4 or less
—	2972AB	0.01	1 (1.4)	5	—	—	8	3	3	50-0-50	1.4 or less
—	2973AB	0.02	1.6 (2)	8	—	—	16	6	5	80-0-80	1.4 or less

Inch											
Code No.		Graduation (in)	Range (range/rev) (in)	Accuracy (in)				Repeat-ability (in)	Dial reading	Measuring force (N)	
w/lug	Flat-back			First 1 Rev/2.5 Rev/10 Rev			Retrace				
—	2976AB	0.0005	0.02 (0.028)	±0.0005/—/—			0.00016	±0.0001	10-0-10	1.4 or less	
—	2977AB	0.0005	0.04 (0.055)	±0.0005/—/—			0.00016	±0.0001	20-0-20	1.4 or less	
—	2978AB	0.001	0.06 (0.079)	±0.001/—/—			0.0002	±0.0002	30-0-30	1.4 or less	

Note: Completed products inspection is performed in the vertical orientation (contact point downward) and the stated accuracy is guaranteed.

Special specifications

Upon request, we can manufacture custom types with changed graduation numbers, graduation lines, dead zones, etc. Please contact your local Mitutoyo Sales Office for more information.


Dial Indicators

SERIES 2 — Standard One Revolution Type for Error-free Reading, Lightweight Type

DIMENSIONS


ISO / JIS
Type

Unit: mm

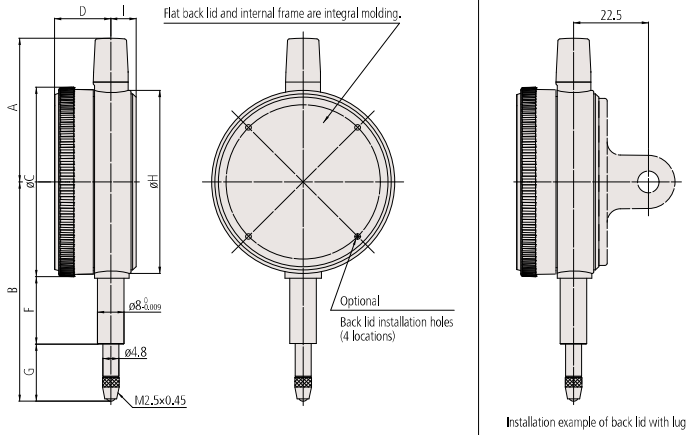

ANSI / AGD
Type

Unit: in

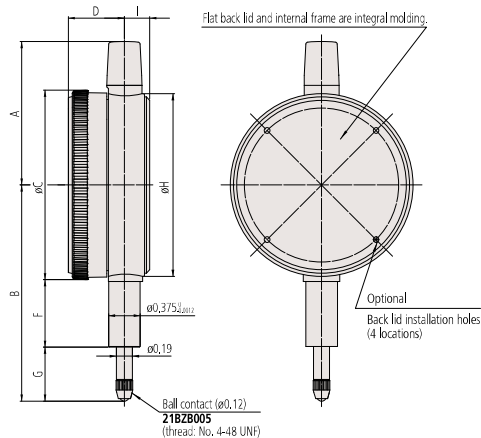

Note 1: When installing an optional back (refer to pages 07-69 to 07-70 for details) 4 retaining screws must also be obtained (546666: Self-tapping screw only for plastic).
Do not apply a tightening torque of more than 20 N·cm in order to avoid stripping the screw threads.
Note 2: An optional lifting lever, release or bezel clamp cannot be installed.

Metric

Code No.	A	B	C	D	F	G	H	I	Mass (g)
2971AB	43.2	65.6	57	16.9	20.3	16.8	55	7.6	70
2972AB	43.2	66	57	16.9	20.3	17.2	55	7.6	
2973AB	43.2	66.3	57	16.9	20.3	17.5	55	7.6	

Inch

Code No.	A	B	C	D	F	G	H	I	Mass (g)
2976AB	1.70	2.55	2.24	0.67	0.80	0.63	2.17	0.30	70
2977AB	1.70	2.56	2.24	0.67	0.80	0.64	2.17	0.30	
2978AB	1.70	2.57	2.24	0.67	0.80	0.65	2.17	0.30	

Note: Refer to pages 07-63 to 07-68 for details of contact points.


Optional Accessory

- Limit hand (2 pcs.): 21AZB195





Balanced scale




Graduation: 0.01 mm,
Measuring range: 0.5 mm

2971AB

- One revolution
- Shockproof
- Dustproof



Balanced scale




Graduation: 0.01 mm,
Measuring range: 1 mm

2972AB

- One revolution
- Shockproof
- Dustproof



Balanced scale











Graduation: 0.02 mm,
Measuring range: 1.6 mm

2973AB

- One revolution
- Shockproof
- Dustproof

FEATURES

Metric		ISO/JIS type		ANSI/AGD type	
Code No.					
w/lug	Flat-back				
—	2971AB	✓	✓	✓	✓
—	2972AB	✓	✓	✓	✓
—	2973AB	✓	✓	✓	✓
Inch		ISO/JIS type		ANSI/AGD type	
Code No.					
w/lug	Flat-back				
—	2976AB	✓	✓	✓	✓
—	2977AB	✓	✓	✓	✓
—	2978AB	✓	✓	✓	✓

Dial Indicators



SERIES 2 — Long Stroke Type

- Long stroke dial indicators with measuring range of 20 mm or more have a $\phi 57$ mm bezel.
- The indicator is highly durable thanks to its oil- and water-tight design, quenched hardened stainless-steel, carbide contact point, and a grand gear made of wear- and deformation-resistant material.
- Application of an anti-reflective and hard surface coating improves scale visibility along with scratch and chemical resistance.
- The lifting lever (optional) cannot be used with models that are water-proof or which have a measurement range of 30 mm.



SPECIFICATIONS

Metric		ISO/JIS type										ANSI/AGD type	
Code No.		Graduation (mm)	Range (range/rev) (mm)	Maximum permissible error (MPE) (μm)						Dial reading	Measuring force (N)		
w/lug	Flat-back			Indication error				Hysteresis	Repeatability				
				1/10 Rev	1/2 Rev	1 Rev	Measuring range						
2050A	2050AB	0.01	20 (1)	8	10	15	20	5	4	±0-100	2.0 or less		
2050A-60*	2050AB-60*	0.01	20 (1)	8	10	15	20	5	4	±0-100	2.5 or less		
2050A-19	2050AB-19	0.01	20 (1)	8	10	15	20	5	4	±0-100	2.0 or less		
2320A-10	2320AB-10	0.01	20 (1)	8	10	15	20	5	4	±0-100	2.0 or less		
2052A	2052AB	0.01	30 (1)	10	12	15	25	7	5	±0-100	2.5 or less		
2052A-19	2052AB-19	0.01	30 (1)	10	12	15	25	7	5	±0-100	2.5 or less		
2330A-10	2330AB-10	0.01	30 (1)	10	12	15	25	7	5	±0-100	2.5 or less		
2952A	2952AB	0.01	30 (1)	10	12	15	25	7	5	100-0	2.5 or less		

* 2050A-60 and 2050AB-60 are water-proof types that use a rubber bellows to cover the spindle.

Note that the outer diameter of the bellows ($\phi 9.5$) is larger than that of the stem ($\phi 8$).

Note: Completed products inspection is performed in the vertical orientation (contact point downward) and the stated accuracy is guaranteed.

Inch									
Code No.		Graduation (in)	Range (range/rev) (in)	Accuracy (in)		Repeatability (in)	Dial reading	Measuring force (N)	
w/lug	Flat-back			First 1 Rev/2.5 Rev/10 Rev	Retrace				
2416A	2416AB	0.001	1 (0.1)	$\pm 0.001/\pm 0.001/\pm 0.002$	0.0002	± 0.0002	$\pm 0-100$	1.8 or less	
2416A-06	2416AB-06	0.001	1 (0.1)	$\pm 0.001/\pm 0.001/\pm 0.002$	0.0002	± 0.0002	$\pm 0-100$	1.8 or less	
2416A-10	2416AB-10	0.001	1 (0.1)	$\pm 0.001/\pm 0.001/\pm 0.002$	0.0002	± 0.0002	$\pm 0-100$	1.8 or less	
2417A	2417AB	0.001	1 (0.1)	$\pm 0.001/\pm 0.001/\pm 0.002$	0.0002	± 0.0002	0-50-0	1.8 or less	
2424A-19	2424AB-19	0.001	2 (0.1)	$\pm 0.001/\pm 0.001/\pm 0.002/\pm 0.003$ (First 20 Rev)	0.00033	± 0.0002	$\pm 0-100$	2.5 or less	
2776A	2776AB	0.0005	1 (0.05)	$\pm 0.0005/\pm 0.0005/\pm 0.0015/\pm 0.002$ (First 20 Rev)	0.0002	± 0.0001	$\pm 0-50$	2.5 or less	
2904A	2904AB	0.001	1 (0.1)	$\pm 0.001/\pm 0.001/\pm 0.002$	0.0002	± 0.0002	100-0	1.8 or less	

Note: Completed products inspection is performed in the vertical orientation (contact point downward) and the stated accuracy is guaranteed.

Optional Accessories

- Limit hand (2 pcs.): **21AZB195**



- Bezel clamp: **21AZB148** (for metric type)
21RZA065 (for inch type)
21RZA067 (for 2424A(B)-19)





21AZB148

DIMENSIONS

ISO/JIS
Type

Unit: mm

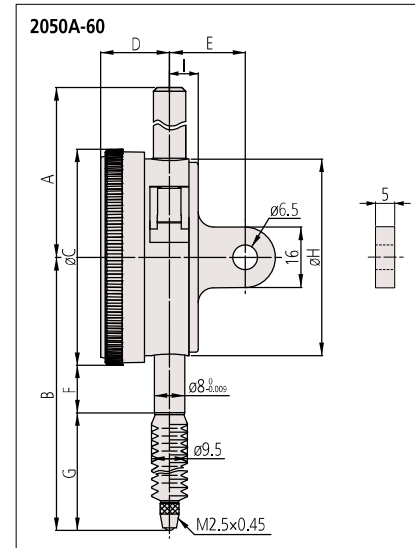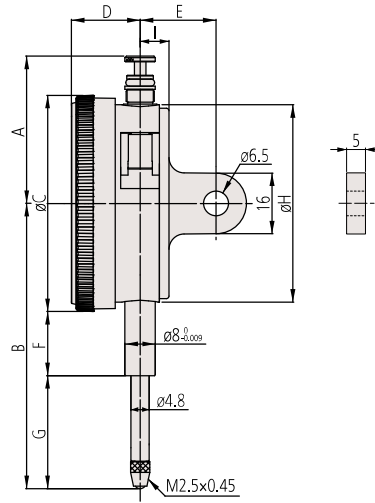


Code No.	A	B	C	D	E	F	G	H	I	Mass (g)	
										w/lug	Flat-back
2050A	38.5	75.2	57	18.1	20	16.9	29.8	52	7.6	149	140
2050A-60	58.2	87.2	57	18.1	20	12.3	46.4	52	7.6	155	146
2050A-19	38.5	75.2	57	18.1	20	16.9	29.8	52	7.6	149	140
2320A-10	38.5	75.2	57	18.1	20	16.9	29.8	52	7.6	150	141
2052A	38.5	88.7	57	18.1	20	16.9	43.3	52	7.6	152	143
2052A-19	38.5	88.7	57	18.1	20	16.9	43.3	52	7.6	152	143
2330A-10	38.5	88.7	57	18.1	20	16.9	43.3	52	7.6	153	144
2952A	38.5	88.7	57	18.1	20	16.9	43.3	52	7.6	152	143

Note: Refer to pages 07-63 to 07-68 for details of contact points.

ANSI/AGD
Type

Unit: in

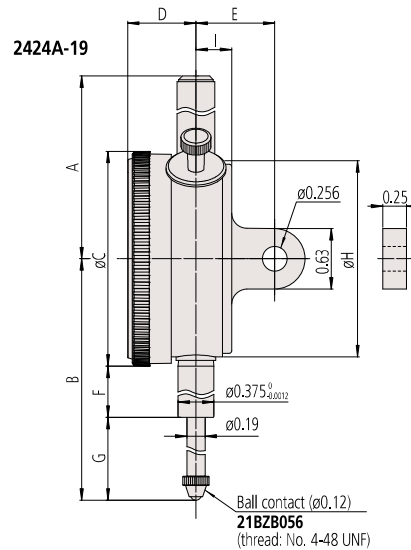

Code No.	A	B	C	D	E	F	G	H	I	Mass (g)	
										w/lug	Flat-back
2416A	1.53	3.02	2.24	0.71	3/4	0.54	1.37	2.05	0.30	164	139
2416A-06	1.53	3.02	2.24	0.71	3/4	0.54	1.37	2.05	0.30	164	139
2416A-10	1.53	3.02	2.24	0.71	3/4	0.54	1.37	2.05	0.30	164	139
2417A	1.53	3.02	2.24	0.71	3/4	0.54	1.37	2.05	0.30	164	139
2424A-19	4.67	5.61	2.24	0.71	5/6	2.14	2.35	2.05	0.37	248	239
2776A	1.53	3.02	2.24	0.71	3/4	0.54	1.37	2.05	0.30	164	139
2904A	1.53	3.02	2.24	0.71	3/4	0.54	1.37	2.05	0.30	164	139

Note: Refer to pages 07-63 to 07-68 for details of contact points.

Dial Indicators

SERIES 2 — Long Stroke Type



Continuous scale



Graduation: 0.01 mm,
Measuring range: 20 mm

2050A

With damper at lowest rest point

2050A-19

Shockproof

Jeweled bearing

With damper at lowest rest point

2050A-60

Waterproof



Continuous scale



Graduation: 0.01 mm,
Measuring range: 30 mm

2052A

With damper at lowest rest point

2052A-19


Shockproof

Jeweled bearing

With damper at lowest rest point



Continuous scale



Graduation: 0.01 mm,
Measuring range: 30 mm

2330A-10

With coaxial revolution counter

With damper at lowest rest point

Jeweled bearing



Continuous scale



Graduation: 0.01 mm,
Measuring range: 20 mm

2320A-10

With coaxial revolution counter

With damper at lowest rest point

Jeweled bearing



Reverse reading



Graduation: 0.01 mm,
Measuring range: 30 mm

2952A

With damper at lowest rest point

FEATURES

Metric ☐ ISO/JIS type ☐ ANSI/AGD type

Code No.											
w/lug	Flat-back										
2050A	2050AB	✓							✓		
2050A-60	2050AB-60	✓					✓				
2050A-19	2050AB-19	✓			✓			✓	✓		
2320A-10	2320AB-10	✓						✓	✓	✓	
2052A	2052AB	✓						✓			
2052A-19	2052AB-19	✓			✓			✓	✓		
2330A-10	2330AB-10	✓						✓	✓	✓	✓
2952A	2952AB			✓				✓			

Inch

Code No.											
w/lug	Flat-back										
2416A	2416AB	✓									
2416A-06	2416AB-06	✓									
2416A-10	2416AB-10	✓					✓				
2417A	2417AB		✓								
2424A-19	2424AB-19	✓		✓			✓			✓	
2776A	2776AB	✓									
2904A	2904AB				✓						

**SERIES 1 — Compact Type, Extra Small Diameter**

- These compact, space-saving dial indicators make it easy to incorporate into gaging jigs.
- The indicator is highly durable thanks to its oil- and water-tight design, quenched hardened stainless-steel, carbide contact point, and a grand gear made of wear- and deformation-resistant material.
- Application of an anti-reflective and hard surface coating improves scale visibility along with scratch and chemical resistance.

07
Indicators**SPECIFICATIONS**

Metric		ISO/JIS type										ANSI/AGD type	
Code No.		Graduation (mm)	Range (range/rev) (mm)	Maximum permissible error (MPE) (μm)							Dial reading	Measuring force (N)	
w/lug	Flat-back			Indication error				Hysteresis	Repeatability				
				1/10 Rev	1/2 Rev	1 Rev	Measuring range						
1911A-10	1911AB-10	0.01	2.5 (1)	8	9	10	12	4	3	0-50-0	1.8 or less		
1913A-10	1913AB-10	0.002	0.5 (0.2)	2.5	4	5	6	2.5	1	0-100-0	1.8 or less		
1003A	1003AB	0.01	4 (1)	8	10	11	13	4	3	0-50-0	1.4 or less		

Inch		ANSI/AGD type									
Code No.		Graduation (in)	Range (range/rev) (in)	Accuracy (in)				Repeatability (in)	Dial reading	Measuring force (N)	
w/lug	Flat-back			First 1 Rev/2.5 Rev/10 Rev		Retrace					
1921A-10	1921AB-10	0.001	0.1 (0.04)	±0.001/±0.001/—		0.0002		±0.0002	0-20-0	1.8 or less	
1923A-10	1923AB-10	0.0005	0.05 (0.02)	±0.0005/±0.005/—		0.00016		±0.0001	0-10-0	1.8 or less	
1925A-10	1925AB-10	0.0001	0.025 (0.01)	±0.0002/±0.0002/—		0.0001		±0.00003	0-5-0	1.8 or less	

Note: Completed products inspection is performed in the vertical orientation (contact point downward) and the stated accuracy is guaranteed.

Dial Indicators



SERIES 1 — Compact Type, Extra Small Diameter

DIMENSIONS

ISO/JIS
Type

Unit: mm


ANSI/AGD
Type

Unit: in

1911A-10/1913A-10

1003A

1921A-10/1923A-10/1925A-10

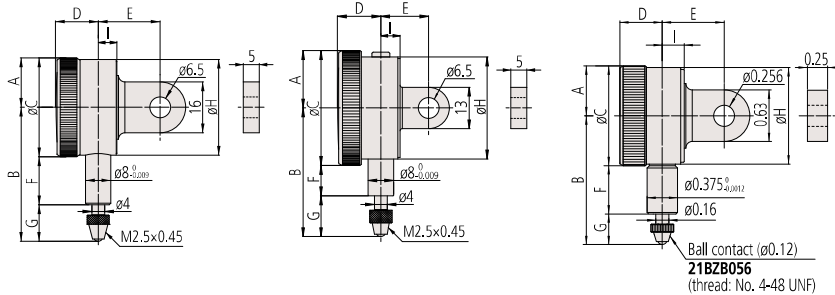

Metric

Unit: mm

Code No.	A	B	C	D	E	F	G	H	I	Mass (g)	
										w/lug	Flat-back
1911A-10	15.5	42	31	12.7	19.4	15.1	11.5	30	6	55	51
1913A-10	15.5	39.5	31	12.7	19.4	15.1	8.9	30	6	55	51
1003A	18	40.3	36	13.5	15	9.5	12.8	32	6	51	48

Inch

Unit: in

Code No.	A	B	C	D	E	F	G	H	I	Mass (g)	
										w/lug	Flat-back
1921A-10	0.61	1.58	1.22	0.5	3/4	0.59	0.37	1.18	0.27	55	51
1923A-10	0.61	1.51	1.22	0.5	3/4	0.59	0.31	1.18	0.27	55	51
1925A-10	0.61	1.48	1.22	0.5	3/4	0.59	0.28	1.18	0.27	55	51

Note 1: Limit hands, bezel clamps and lifting levers cannot be installed.

Note 2: The shoulder on a contact point (standard accessory) acts as a stop to prevent spindle overrun that may otherwise damage the indicator. When replacing it with an optional contact point with a connector not exceeding ø7 mm in outside diameter, insert a washer (with ø7 mm outside diameter, ø3 mm inside diameter, and approximately 0.5 mm thickness) above the contact point.

Note 3: Being fixed by only two retaining screws, the back cannot be rotated by 90° to change the orientation of the lug.



Balanced scale



Graduation: 0.01 mm,
Measuring range: 2.5 mm
Jeweled bearing




Balanced scale



Graduation: 0.002 mm,
Measuring range: 0.5 mm
Jeweled bearing



Balanced scale



Graduation: 0.01 mm,
Measuring range: 4 mm
1003A



SERIES 1 — Compact Type, Small Diameter

- Compact dial indicators ideal for restricted-space applications in gaging jigs.
- The indicator is highly durable thanks to its oil- and water-tight design, quenched hardened stainless-steel, carbide contact point, and a grand gear made of wear- and deformation-resistant material.
- Application of an anti-reflective and hard surface coating improves scale visibility along with scratch and chemical resistance.



1044A

07
Indicators

SPECIFICATIONS

Metric		ISO/JIS type										ANSI/AGD type	
Code No.		Graduation (mm)	Range (range/rev) (mm)	Maximum permissible error (MPE) (μm)						Dial reading	Measuring force (N)		
w/lug	Flat-back			Indication error				Hysteresis	Repeatability				
				1/10 Rev	1/2 Rev	1 Rev	Measuring range						
1013A-10	1013AB-10	0.002	1 (0.2)	2.5	4	5	6	2.5	1	0-100-0	1.5 or less		
1040A	1040AB	0.01	3.5 (0.5)	8	10	11	13	4	3	±0-50	1.4 or less		
1041A	1041AB	0.01	3.5 (0.5)	8	10	11	13	4	3	0-25-0	1.4 or less		
1044A	1044AB	0.01	5 (1)	8	10	11	13	4	3	±0-100	1.4 or less		
1044A-15	1044AB-15	0.01	5 (1)	8	10	11	13	4	3	±0-100	0.4 or less*		
1044A-60	1044AB-60	0.01	5 (1)	8	10	11	13	4	3	±0-100	2.0 or less		
1045A	1045AB	0.01	5 (1)	8	10	11	13	4	3	0-50-0	1.4 or less		
1109A-10	1109AB-10	0.001	1 (0.2)	2.5	3.5	4.5	5	2	1	0-100-0	1.5 or less		
1124A	1124AB	0.005	3.5 (0.5)	6	9	10	12	3.5	3	±0-50	1.4 or less		

* For low measuring force type, use in the vertical orientation.

Note: Completed products inspection is performed in the vertical orientation (contact point downward) and the stated accuracy is guaranteed.

Inch												
Code No.		Graduation (in)	Range (range/rev) (in)	Accuracy (in)		Repeat- ability (in)	Dial reading	Measuring force (N)				
w/lug	Flat-back			First 1 Rev/2.5 Rev/10 Rev								
1410A	1410AB	0.001	0.25 (0.1)	±0.001/±0.001/—		0.0002	±0.0002	0-100	1.4 or less			
1411A	1411AB	0.001	0.25 (0.1)	±0.001/±0.001/—		0.0002	±0.0002	0-50-0	1.4 or less			
1410A-10	1410AB-10	0.001	0.25 (0.1)	±0.001/±0.001/—		0.0002	±0.0002	0-100	1.4 or less			
1780A	1780AB	0.001	0.125 (0.05)	±0.001/±0.001/—		0.0002	±0.0002	0-50	1.4 or less			
1781A	1781AB	0.001	0.125 (0.05)	±0.001/±0.001/—		0.0002	±0.0002	0-25-0	1.4 or less			
1506A	1506AB	0.0005	0.125 (0.05)	±0.0005/±0.0005/—		0.00016	±0.0001	0-50	1.4 or less			
1507A	1507AB	0.0005	0.125 (0.05)	±0.0005/±0.0005/—		0.00016	±0.0001	0-25-0	1.4 or less			
1670A	1670AB	0.0005	0.1 (0.04)	±0.0005/±0.0005/—		0.00016	±0.0001	0-40	1.4 or less			
1671A	1671AB	0.0005	0.1 (0.04)	±0.0005/±0.0005/—		0.00016	±0.0001	0-20-0	1.4 or less			
1802A-10	1802AB-10	0.0001	0.025 (0.01)	±0.0001/±0.0001/—		0.0001	±0.00003	0-10	1.5 or less			
1803A-10	1803AB-10	0.0001	0.025 (0.01)	±0.0001/±0.0001/—		0.0001	±0.00003	0-5-0	1.5 or less			

Note: Completed products inspection is performed in the vertical orientation (contact point downward) and the stated accuracy is guaranteed.

Dial Indicators


Dial Indicators

SERIES 1 — Compact Type, Small Diameter

DIMENSIONS

ISO/JIS
Type

Unit: mm

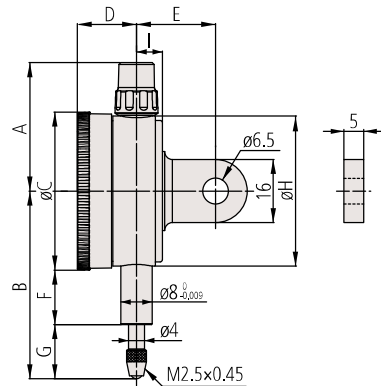


Code No.	A	B	C	D	E	F	G	H	I
1013A-10	32.5	49	40	15	20	13.8	15.2	38	6.6
1040A	32.5	46	40	15	20	13.8	12.2	38	6.6
1041A	32.5	46	40	15	20	13.8	12.2	38	6.6
1044A	32.5	47.5	40	15	20	13.8	13.7	38	6.6
1044A-15*	32.5	47.5	40	15	20	13.8	13.7	38	6.6
1044A-60	32.5	57	40	15	20	12.2	24.8	38	6.6
1045A	32.5	47.5	40	15	20	13.8	13.7	38	6.6
1109A-10	32.5	49	40	15	20	13.8	15.2	38	6.6
1124A	32.5	46	40	15	20	13.8	12.2	38	6.6

* Use in the vertical orientation (contact point downward) for the low measuring force model.
Note: Refer to pages 07-63 to 07-68 for details of contact points.

ANSI/AGD
Type

Unit: in

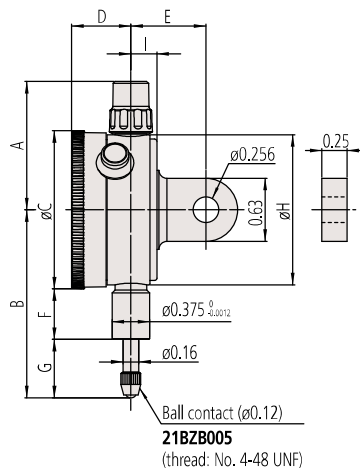

Code No.	A	B	C	D	E	F	G	H	I
1410A	1.28	1.87	1.57	0.59	3/4	0.50	0.58	1.50	0.26
1411A	1.28	1.87	1.57	0.59	3/4	0.50	0.58	1.50	0.26
1410A-10	1.28	1.87	1.57	0.59	3/4	0.50	0.58	1.50	0.26
1780A	1.28	1.74	1.57	0.59	3/4	0.50	0.44	1.50	0.26
1781A	1.28	1.74	1.57	0.59	3/4	0.50	0.44	1.50	0.26
1506A	1.28	1.74	1.57	0.59	3/4	0.50	0.44	1.50	0.26
1507A	1.28	1.74	1.57	0.59	3/4	0.50	0.44	1.50	0.26
1670A	1.28	1.71	1.57	0.59	3/4	0.50	0.42	1.50	0.26
1671A	1.28	1.71	1.57	0.59	3/4	0.50	0.42	1.50	0.26
1802A-10	1.28	1.63	1.57	0.59	3/4	0.50	0.33	1.50	0.26
1803A-10	1.28	1.63	1.57	0.59	3/4	0.49	0.33	1.50	0.26

Note: Refer to pages 07-63 to 07-68 for details of contact points.




Optional Accessories

- Limit hand (2 pcs.): 21AAB363



- Bezel clamp: 21RZA149



**Continuous scale**Graduation: 0.01 mm,
Measuring range: 3.5 mm**1040A** **Double scale
spacing****Balanced scale**Graduation: 0.01 mm,
Measuring range: 3.5 mm**1041A** **Double scale
spacing****Continuous scale**Graduation: 0.01 mm,
Measuring range: 5 mm**1044A** **1044A-15**
 **Jeweled
bearing****Balanced scale**Graduation: 0.01 mm,
Measuring range: 5 mm**1045A****Balanced scale**Graduation: 0.001 mm,
Measuring range: 1 mm**1109A-10** **Shockproof**
 **Jeweled
bearing****Balanced scale**Graduation: 0.002 mm,
Measuring range: 1 mm**1013A-10** **Shockproof**
 **Jeweled
bearing****Continuous scale**Graduation: 0.005 mm,
Measuring range: 3.5 mm**1124A****Continuous scale**Graduation: 0.01 mm,
Measuring range: 5 mm**1044A-60** **Waterproof**

FEATURES

Metric ☐ ISO/JIS type ☐ ANSI/AGD type

Code No.						
w/lug	Flat-back					
1013A-10	1013AB-10		✓		✓	✓
1040A	1040AB	✓		✓		
1041A	1041AB		✓	✓		
1044A	1044AB	✓				
1044A-15	1044AB-15	✓				✓
1044A-60	1044AB-60	✓				✓
1045A	1045AB		✓			
1109A-10	1109AB-10		✓		✓	✓
1124A	1124AB	✓				

Inch

Code No.					
w/lug	Flat-back				
1410A	1410AB	✓			
1411A	1411AB		✓		
1410A-10	1410AB-10	✓		✓	
1780A	1780AB	✓			
1781A	1781AB		✓		
1506A	1506AB	✓			
1507A	1507AB		✓		
1670A	1670AB	✓			
1671A	1671AB		✓		
1802A-10	1802AB-10	✓		✓	✓
1803A-10	1803AB-10		✓		✓

Dial Indicators

SERIES 1 — Compact One Revolution Type for Error-free Reading

- The one revolution dial indicator (compact type) prevents the possibility of reading errors.
- Mitutoyo's unique shock-proof mechanism is incorporated, providing improved resistance to shock due to sudden spindle retraction caused by impact.
- The indicator is highly durable thanks to its oil- and water-tight design, quenched hardened stainless-steel, carbide contact point, and a grand gear made of wear- and deformation-resistant material.
- Application of an anti-reflective and hard surface coating improves scale visibility along with scratch and chemical resistance.
- The red dead zone in the middle of the dial face is separated from the bezel and doesn't cover the graduations. Therefore, users can always see the range where accuracy is not guaranteed even if the bezel is rotated.



1929A



One revolution type Back Plunger dial gages are also available. (Refer to pages 07-59 to 07-62 for details.)



2990A-10

SPECIFICATIONS

Metric

ISO/JIS type ANSI/AGD type

Code No.		Graduation (mm)	Range (range/rev) (mm)	Maximum permissible error (MPE) (μm)					Dial reading	Measuring force (N)	
w/lug	Flat-back			Indication error				Hysteresis			Repeat-ability
				1/10 Rev	1/2 Rev	1 Rev	Measuring range				
1929A	1929AB	0.01	1 (1.4)	7	—	—	11	4	3	50-0-50	1.4 or less
1929A-62	1929AB-62	0.01	1 (1.4)	7	—	—	11	4	3	50-0-50	1.4 or less
1900A-10	1900AB-10	0.001	0.1 (0.14)	2.5	—	—	5	2	1	50-0-50	1.5 or less
1900A-72	1900AB-72	0.001	0.1 (0.14)	2.5	—	—	5	2	1	50-0-50	1.5 or less


Inch

Code No.	Graduation (in)	Range (range/rev) (in)	Accuracy (in)		Repeat-ability (in)	Dial reading	Measuring force (N)
			First 1 Rev/2.5 Rev/10 Rev	Retrace			
w/lug	Flat-back						
1909A-62	1909AB-62	0.0005	0.04 (0.056)	±0.0005/—/—	0.00016	±0.0001	20-0-20 1.4 or less
1910A-72	1910AB-72	0.0001	0.006 (0.008)	±0.0001/—/—	0.0001	±0.00003	3-0-3 1.5 or less


Note: Completed products inspection is performed in the vertical orientation (contact point downward) and the stated accuracy is guaranteed.

DIMENSIONS

ISO/JIS Type



ANSI/AGD Type



2182B005
(thread: No. 4-48 UNF)

Metric

Code No.	A	B	C	D	E	F	G	H	I	Mass (g)	
										w/lug	Flat-back
1929A	32.5	47.5	40	15	20	13.8	13.7	38	6.6	90	70
1929A-62	32.5	47.5	40	15	20	13.8	13.7	38	6.6	90	70
1900A-10	32.5	53.5	40	15	20	13.8	19.7	38	6.6	95	75
1900A-72	32.5	53.5	40	15	20	13.8	19.7	38	6.6	95	75

Inch

Code No.	A	B	C	D	E	F	G	H	I	Mass (g)	
										w/lug	Flat-back
1909A-62	1.28	1.64	1.57	0.59	0.75	0.50	0.35	1.50	0.26	90	70
1910A-72	1.28	1.61	1.57	0.59	0.75	0.50	0.31	1.50	0.26	90	70

Note: Refer to pages 07-63 to 07-68 for details of contact points.

Special specifications

Upon request, we can manufacture custom types with changed graduation numbers, graduation lines, dead zones, etc. Please contact your local Mitutoyo Sales Office for more information.

Optional Accessories

- Limit hand (2 pcs.), Bezel clamp
Refer to page 07-49 for details.



Balanced scale



Graduation: 0.001 mm,
Measuring range: 0.1 mm

1900A-10

One revolution

Shockproof

Jeweled bearing

1900A-72

One revolution

Shockproof

Dustproof

Jeweled bearing



Balanced scale



Graduation: 0.01 mm,
Measuring range: 1 mm

1929A

One revolution

Shockproof

1929A-62

One revolution

Shockproof

Dustproof

FEATURES

Metric ☐ ISO/JIS type ☐ ANSI/AGD type

Code No.						
w/lug	Flat-back					
1929A	1929AB	✓	✓			✓
1929A-62	1929AB-62	✓	✓		✓	✓
1900A-10	1900AB-10	✓	✓	✓		✓
1900A-72	1900AB-72	✓	✓	✓	✓	✓

Inch

Code No.						
w/lug	Flat-back					
1909A-62	1909AB-62	✓	✓		✓	✓
1910A-72	1910AB-72	✓	✓	✓	✓	✓

Dial Indicators




SERIES 3, 4 — Long Stroke Type, Large Diameter

- Dial indicators with a large-diameter dial face for easy reading.
- The indicator is highly durable thanks to its oil- and water-tight design, quenched hardened stainless-steel, carbide contact point, and a grand gear made of wear- and deformation-resistant material.
- Application of an anti-reflective and hard surface coating improves scale visibility along with scratch and chemical resistance.

Optional Accessories

- Limit hand (2 pcs.), Bezel clamp
Refer to page 07-31 for details.

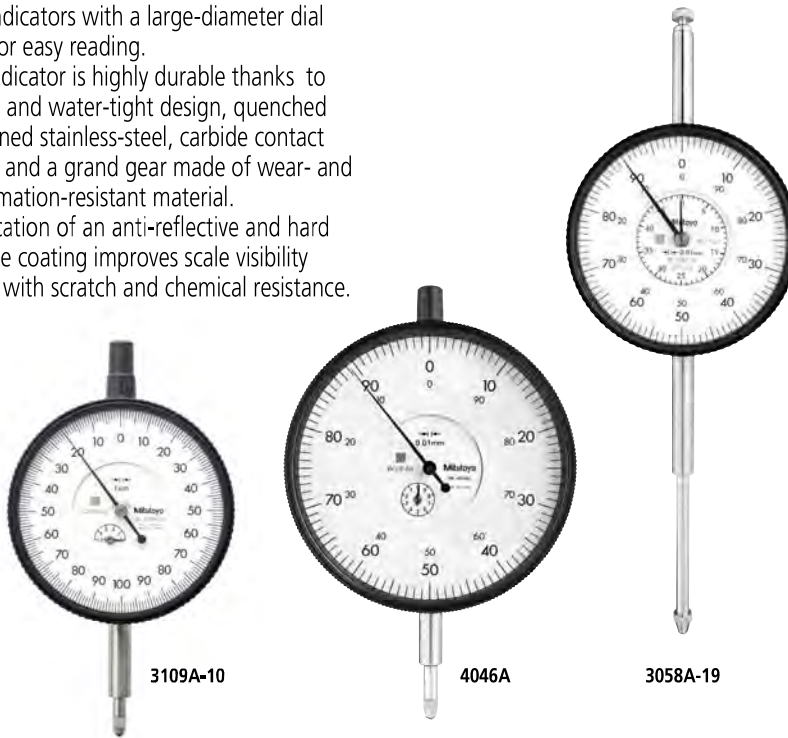

SPECIFICATIONS

Metric

☐ ISO/JIS type ☐ ANSI/AGD type

Code No.		Graduation (mm)	Range (range/rev) (mm)	Maximum permissible error (MPE) (μm)						Dial reading	Measuring force (N)
w/lug	Flat-back			Indication error				Hysteresis	Repeat- ability		
				1/10 Rev	1/2 Rev	1 Rev	Measuring range				
3046A	3046AB	0.01	10 (1)	5	9	10	15	3	3	±0-100	1.4 or less
3047A	3047AB	0.01	10 (1)	5	9	10	15	3	3	0-50-0	1.4 or less
3050A	3050AB	0.01	20 (1)	8	10	15	20	5	4	±0-100	2.0 or less
3052A-19	3052AB-19	0.01	30 (1)	10	12	15	25	7	5	±0-100	2.5 or less
3058A-19	3058AB-19	0.01	50 (1)	10	12	15	30	8	5	±0-100	3.0 or less
3060A-19*1	3060AB-19*1	0.01	80 (1)	12	17	20	45	9	5	±0-100	3.0 or less
3062A-19*1	3062AB-19*1	0.01	100 (1)	12	17	20	50	9	5	±0-100	3.5 or less
3109A-10	3109AB-10	0.001	1 (0.2)	2	3.5	4	5	2	0.5	0-100-0	1.5 or less
4046A	4046AB	0.01	10 (1)	5	9	10	15	3	3	±0-100	1.4 or less

Inch


Code No.		Graduation (in)	Range (range/rev) (in)	Accuracy*2 (in)			Repeat-ability (in)	Dial reading	Measuring force (N)
w/lug	Flat-back			First 1 Rev/2.5 Rev/10 Rev		Retrace			
3414A	3414AB	0.001	0.5 (0.1)	±0.001/±0.001/±0.001		0.0002	±0.0002	±0-100	1.8 or less
3415A	3415AB	0.001	0.5 (0.1)	±0.001/±0.001/±0.001		0.0002	±0.0002	0-50-0	1.8 or less
3416A	3416AB	0.001	1 (0.1)	±0.001/±0.001/±0.002		0.0002	±0.0002	±0-100	1.8 or less
3417A	3417AB	0.001	1 (0.1)	±0.001/±0.001/±0.002		0.0002	±0.0002	0-50-0	1.8 or less
3424A-19	3424AB-19	0.001	2 (0.1)	±0.001/±0.001/±0.002 / ±0.003 (20 Rev)		0.00033	±0.0002	±0-100	3.0 or less
3426A-19*1	3426AB-19*1	0.001	3 (0.1)	±0.001/±0.001/±0.002/±0.003 (20 Rev)/±0.005 (Over 20 Rev)		0.00033	±0.0002	±0-100	3.0 or less
3428A-19*1	3428AB-19*1	0.001	4 (0.1)	±0.001/±0.001/±0.002/±0.003 (20 Rev)/±0.005 (Over 20 Rev)		0.00033	±0.0002	±0-100	3.5 or less
3802A-10	3802AB-10	0.0001	0.025 (0.01)	±0.0001/±0.0001/—		0.0001	±0.00003	0-10	2.0 or less
3803A-10	3803AB-10	0.0001	0.025 (0.01)	±0.0001/±0.0001/—		0.0001	0±0.0003	0-5-0	2.0 or less
4887A-19*1	4887AB-19*1	0.001	3 (0.1)	±0.001/±0.001/±0.002/±0.003 (20 Rev)/±0.005 (Over 20 Rev)		0.00033	±0.0002	±0-100	3.0 or less

*1 Use in a vertical orientation (contact point downward) for the long stroke model.

*2 Completed products inspection is performed in the vertical orientation (contact point downward) and the stated accuracy is guaranteed.


Indicators

Unit: mm

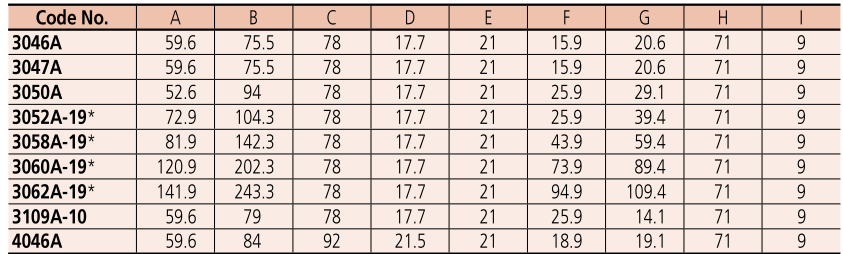

Note: Refer to pages 07-63 to 07-68 for details of contact points.

Unit: in

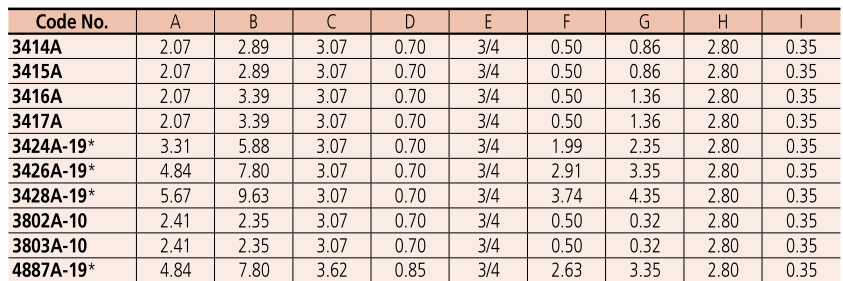

Note: Refer to pages 07-63 to 07-68 for details of contact points.

Dial Indicators

SERIES 3, 4 — Long Stroke Type, Large Diameter



Continuous scale



Graduation: 0.01 mm, 3046A
Measuring range: 10 mm



Balanced scale



Graduation: 0.01 mm, 3047A
Measuring range: 10 mm



Continuous scale



Graduation: 0.01 mm, 3050A
Measuring range: 20 mm



Continuous scale



Graduation: 0.01 mm, 3052A-19
Measuring range: 30 mm



Continuous scale



Graduation: 0.01 mm, 3058A-19
Measuring range: 50 mm




Continuous scale



Graduation: 0.01 mm, 3060A-19
Measuring range: 80 mm



Continuous scale



Graduation: 0.01 mm, 3062A-19
Measuring range: 100 mm



Balanced scale



Graduation: 0.001 mm, 3109A-10
Measuring range: 1 mm



Continuous scale



Graduation: 0.01 mm, 4046A
Measuring range: 10 mm

FEATURES

Metric		ISO/JIS type					
Code No.	Flat-back						
3046A	3046AB	✓					
3047A	3047AB		✓				
3050A	3050AB	✓			✓		
3052A-19	3052AB-19	✓		✓		✓	✓
3058A-19	3058AB-19	✓		✓		✓	✓
3060A-19	3060AB-19	✓		✓		✓	✓
3062A-19	3062AB-19	✓		✓		✓	✓
3109A-10	3109AB-10		✓	✓		✓	✓
4046A	4046AB	✓					

Inch		ANSI/AGD type					
Code No.	Flat-back						
3414A	3414AB	✓					
3415A	3415AB		✓				
3416A	3416AB	✓					
3417A	3417AB		✓				
3424A-19	3424AB-19	✓		✓	✓	✓	✓
3426A-19	3426AB-19	✓		✓	✓	✓	✓
3428A-19	3428AB-19	✓		✓	✓	✓	✓
3802A-10	3802AB-10	✓		✓			
3803A-10	3803AB-10		✓	✓	✓	✓	✓
4887A-19	4887AB-19	✓		✓	✓	✓	✓



Optional Accessories

- Backs (See pages 07-69 to 07-70)
- Contact points (See pages 07-63 to 07-68)

ANSI/AGD Type Metric Dial Indicators with $\varnothing 3/8$ inch Stem and #4-48UNF-Thread Contact Point Compatible Type

SPECIFICATIONS

Metric		SERIES 1		ANSI/AGD type				
Code No.		Graduation (mm)	Range (range/rev) (mm)	Accuracy (μm)		Repeat-ability (μm)	Dial reading	Measuring force (N)
w/lug	Flat-back			First 1 Rev/2.5 Rev/10 Rev	Retrace			
1230A-01	1230AB-01	0.01	2.5 (1)	$\pm 10/\pm 10/-$	3	± 2	0-100	1.4 or less
1231A-01	1231AB-01	0.01	2.5 (1)	$\pm 10/\pm 10/-$	3	± 2	0-50-0	1.4 or less
1044A-01	1044AB-01	0.01	5 (1)	$\pm 10/\pm 10/\pm 13$	3	± 3	$\pm 0-100$	1.4 or less
1045A-01	1045AB-01	0.01	5 (1)	$\pm 10/\pm 10/\pm 13$	3	± 3	0-50-0	1.4 or less
1010A-11	1010AB-11	0.002	0.5 (0.2)	$\pm 2/\pm 2/-$	2	± 1	0-20	1.5 or less
1011A-11	1011AB-11	0.002	0.5 (0.2)	$\pm 2/\pm 2/-$	2	± 1	0-10-0	1.5 or less

Metric		SERIES 2		ANSI/AGD type				
Code No.		Graduation (mm)	Range (range/rev) (mm)	Accuracy (μm)		Repeat-ability (μm)	Dial reading	Measuring force (N)
w/lug	Flat-back			First 1 Rev/2.5 Rev/10 Rev	Retrace			
2231A-01	2231AB-01	0.01	2.5 (1)	$\pm 10/\pm 10/-$	3	± 3	0-50-0	1.4 or less
2046A-01	2046AB-01	0.01	10 (1)	$\pm 10/\pm 10/\pm 13$	3	± 3	$\pm 0-100$	1.4 or less
2046A-11	2046AB-11	0.01	10 (1)	$\pm 10/\pm 10/\pm 13$	3	± 3	$\pm 0-100$	1.4 or less
2047A-01	2047AB-01	0.01	10 (1)	$\pm 10/\pm 10/\pm 13$	3	± 3	0-50-0	1.4 or less
2047A-11	2047AB-11	0.01	10 (1)	$\pm 10/\pm 10/\pm 13$	3	± 3	0-50-0	1.4 or less
2902A-01	2902AB-01	0.01	10 (1)	$\pm 10/\pm 10/\pm 13$	3	± 3	100-0	1.4 or less
2050A-01	2050AB-01	0.01	20 (1)	$\pm 10/\pm 10/\pm 15/\pm 20$ (20 Rev)	4	± 3	$\pm 0-100$	2.0 or less
2056A-01	2056AB-01	0.01	25 (1)	$\pm 10/\pm 10/\pm 15/\pm 20$ (20 Rev)/ ± 25 (Over 20 Rev)	4	± 3	$\pm 0-100$	2.5 or less
2109A-11	2109AB-11	0.001	1 (0.2)	$\pm 3/\pm 3/\pm 4$	2	± 0.3	0-10-0	1.5 or less
2119A-11	2119AB-11	0.001	5 (0.2)	$\pm 7/\pm 7/\pm 8/\pm 10$ (20 Rev)/ ± 10 (Over 20 Rev)	2.5	± 0.3	0-10-0	1.5 or less

Note: Completed products inspection is performed in the vertical orientation (contact point downward) and the stated accuracy is guaranteed.

FEATURES

Metric		ANSI/AGD type							
Code No.									
w/lug	Flat-back								
1230A-01	1230AB-01								
1231A-01	1231AB-01								
1044A-01	1044AB-01								
1045A-01	1045AB-01								
1010A-11	1010AB-11			✓				✓	
1011A-11	1011AB-11			✓				✓	

Metric											
Code No.											
w/lug	Flat-back										
2231A-01	2231AB-01										
2046A-01	2046AB-01										
2046A-11	2046AB-11			✓							
2047A-01	2047AB-01										
2047A-11	2047AB-11			✓							
2902A-01	2902AB-01										✓
2050A-01	2050AB-01										
2056A-01	2056AB-01										
2109A-11	2109AB-11			✓				✓			
2119A-11	2119AB-11			✓							

Dial Indicators



SERIES 2 — Special Dial Indicators

Adjustable hand dial indicator

- The hand position can be adjusted independently of the vertical movement of the spindle by rotating the top knob.



2048A-10

Optional Accessories

- Limit hand (2 pcs.), Bezel clamp


Refer to page 07-27 for details.

SPECIFICATIONS

Metric											
Code No.		Graduation (mm)	Range (range/rev) (mm)	Maximum permissible error (MPE) (μm)						Dial reading	Measuring force (N)
w/lug	Flat-back			Indication error				Hysteresis	Repeat-ability		
				1/10 Rev	1/2 Rev	1 Rev	Measuring range				
2048A-10	2048AB-10	0.01	10 (1)	5	9	10	15	3	3	±0-100	1.4 or less

Note: Completed products inspection is performed in the vertical orientation (contact point downward) and the stated accuracy is guaranteed.

DIMENSIONS

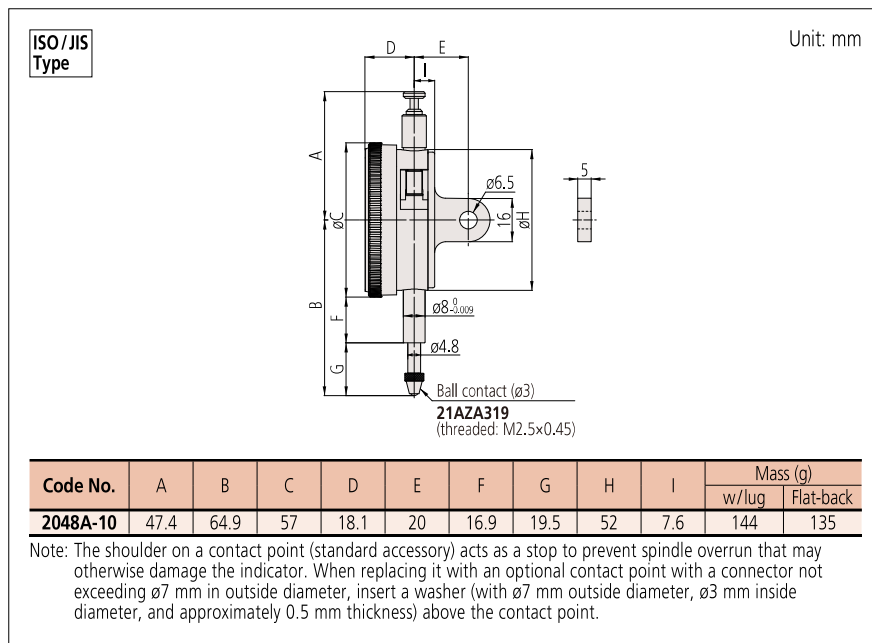

Continuous scale

Graduation: 0.01 mm,
Measuring range: 10 mm

2048A-10






With coaxial revolution counter

Adjustable hand

Jeweled bearing



FEATURES

Metric							
Code No.							
w/lug	Flat-back						
2048A-10	2048AB-10	✓	✓		✓	✓	



Optional Accessories

- Limit hand (2 pcs.), Bezel clamp
Refer to page 07-27 for details.

SERIES 2 — Special Dial Indicators

- A mechanism holds the pointer and the spindle at the position of maximum depression and hence displays the maximum value.

Note: Clearance of peak hold: Push the nut in the direction of the arrow indicated in the dimensional drawing for **2046A-80**.


**2046A-80**07
Indicators

SPECIFICATIONS

Metric		ISO/JIS type									
Code No.		Graduation (mm)	Range (range/rev) (mm)	Maximum permissible error (MPE) (μm)						Dial reading	Measuring force (N)
w/lug	Flat-back			Indication error				Hysteresis	Repeat-ability		
				1/10 Rev	1/2 Rev	1 Rev	Measuring range				
2046A-80	2046AB-80	0.01	10 (1)	5	9	10	15	—	—	±0-100	5.0 or less

Note: Completed products inspection is performed in the vertical orientation (contact point downward) and the stated accuracy is guaranteed.

DIMENSIONS

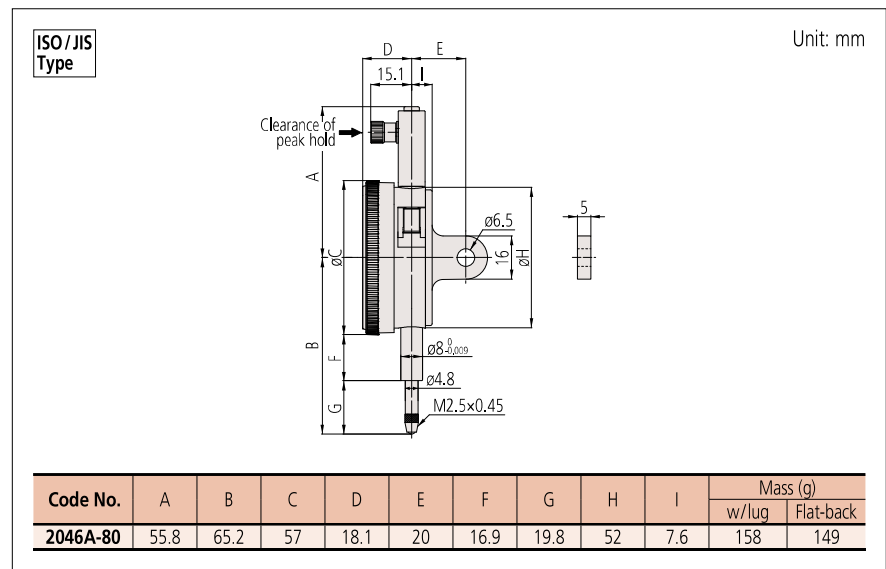

Dial Indicators

**Continuous scale**

Graduation: 0.01 mm,
Measuring range: 10 mm

2046A-80 **Peak retaining**

FEATURES

Metric					
Code No.					
w/lug	Flat-back				
2046A-80	2046AB-80	✓		✓	

Mitutoyo

Dial Indicators

Back Plunger Type Dial Indicators SERIES 2

- The one revolution dial indicator (back plunger type) prevents the possibility of reading errors.
- Back plunger type dial indicators are suitable for mounting onto levelling machine tool tables or inspection jigs, and for use in situations where standard dial indicators are difficult to read.
- Mitutoyo's unique shockproof mechanism provides excellent durability and shock resistance.
- Model **2990A-10** provides 0.001 mm graduation.
- The red dead zone in the middle of the dial face is separated from the bezel and doesn't cover the graduations. Therefore, users can always see the range where accuracy is not guaranteed even if the bezel is rotated.



2960A



Holding bar

SPECIFICATIONS

Metric	<div><div></div> ISO/JIS type <div></div> ANSI/AGD type</div>									
Code No.	Graduation (mm)	Range (range/rev) (mm)	Maximum permissible error (MPE) (μm)						Dial reading	Measuring force (N)
			Indication error				Hysteresis	Repeat-ability		
			1/10 Rev	1/2 Rev	1 Rev	Measuring range				
2960A	0.01	1 (1.27)	8	—	—	14	4	3	50-0-50	1.4 or less
2990A-10	0.001	0.1 (0.14)	2.5	—	—	5	2	1	50-0-50	1.5 or less

Inch										
Code No.	Graduation (in)	Range (range/rev) (in)	Accuracy (in)		Repeatability (in)	Dial reading	Measuring force (N)			
			First 1 Rev/2.5 Rev/10 Rev					Retrace		
2961A	0.0005	0.04 (0.05)	±0.0005/—/—		0.00016	±0.0001	20-0-20	1.4 or less		
2991A-10	0.0001	0.008 (0.01)	±0.0002/—/—		0.0001	±0.00005	4-0-4	1.5 or less		


ISO/JIS type ANSI/AGD type

Inch								
Code No.	Graduation (in)	Range (range/rev) (in)	Accuracy (in)		Repeatability (in)	Dial reading	Measuring force (N)	
			First 1 Rev/2.5 Rev/10 Rev	Retrace				
2961A	0.0005	0.04 (0.05)	±0.0005/—/—	0.00016	±0.0001	20-0-20	1.4 or less	
2991A-10	0.0001	0.008 (0.01)	±0.0002/—/—	0.0001	±0.00005	4-0-4	1.5 or less	

Note 1: Completed products inspection is performed in the vertical orientation (contact point downward) and the stated accuracy is guaranteed.

Note 2: The bezel clamp cannot be used.

DIMENSIONS

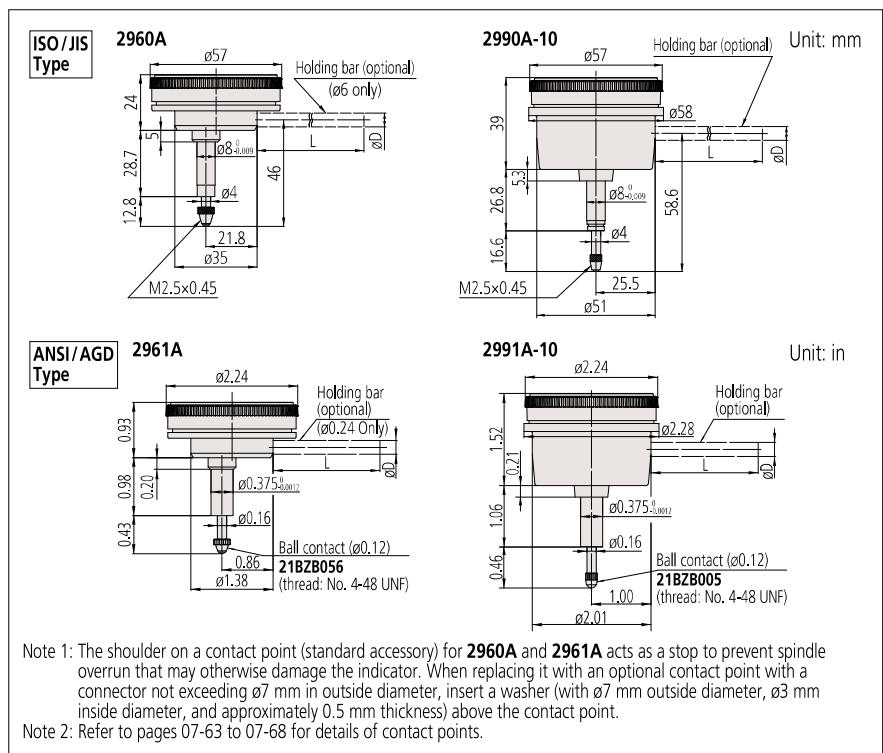

Holding bar (optional)

Code No.	ϕD (mm)	L (mm)
21AAA166	$\phi 6$	42
136567	$\phi 6$	81
124625	$\phi 6.35$	81
21AAA167	$\phi 6.35$	42
21AAA168	$\phi 8$	42
136568	$\phi 8$	81

Note: ϕD and L: detail shown in drawing below.

Optional Accessory


- Limit hand (2 pcs.)
- Refer to page 07-41 for details.

Special specifications

Upon request, we can manufacture custom types with changed graduation numbers, graduation lines, dead zones, etc. Please contact your local Mitutoyo Sales Office for more information.



Balanced scale



Graduation: 0.01 mm,
Measuring range: 1 mm

2960A

- One revolution
- Shockproof
- Back Plunger



Balanced scale



Graduation: 0.001 mm,
Measuring range: 1 mm

2990A-10

- One revolution
- Shockproof
- Back Plunger
- Jeweled bearing

FEATURES

Metric	ISO/JIS type	ANSI/AGD type
Code No.		
2960A	✓	✓
2990A-10	✓	✓
Inch	ISO/JIS type	ANSI/AGD type
Code No.		
2961A	✓	✓
2991A-10	✓	✓

Dial Indicators

Back Plunger Type Dial Indicators SERIES 1

- Back plunger type dial indicators are suitable for mounting onto levelling machine tool tables or inspection jigs, and for use in situations where standard dial indicators are difficult to read.
- Models **1960A** and **1961A**, which use Mitutoyo's proprietary shock-proofing mechanism, have excellent durability and shock resistance.



1160A



Holding bar

SPECIFICATIONS

Metric							ISO/JIS type		ANSI/AGD type	
Code No.	Graduation (mm)	Range (range/rev) (mm)	Maximum permissible error (MPE) (μm)						Dial reading	Measuring force (N)
			Indication error				Hysteresis	Repeat-ability		
			1/10 Rev	1/2 Rev	1 Rev	Measuring range				
1960A	0.01	1 (1.27)	8	—	—	14	4	3	50-0-50	1.4 or less
1160A	0.01	5 (1)	8	12	14	16	4	3	±0-100	1.4 or less
1162A	0.01	5 (1)	8	12	14	16	4	3	100-0	1.4 or less

Inch										
Code No.	Graduation (in)	Range (range/rev) (in)	Accuracy (in)				Repeat-ability (in)	Dial reading	Measuring force (N)	
			First 1 Rev/2.5 Rev/10 Rev		Retrace					
1961A	0.001	0.04 (0.05)	±0.001/—/—		0.0002		±0.0002	20-0-20	1.4 or less	
1166A	0.001	0.2 (0.05)	±0.001/±0.001/±0.001		0.00033		±0.0002	±0-50	1.4 or less	
1167A	0.001	0.2 (0.05)	±0.001/±0.001/±0.001		0.00033		±0.0002	0-25-0	1.4 or less	
1168A	0.001	0.2 (0.05)	±0.001/±0.001/±0.001		0.00033		±0.0002	50-0	1.4 or less	

Note 1: Completed products inspection is performed in the vertical orientation (contact point downward) and the stated accuracy is guaranteed.

Note 2: The bezel clamp cannot be used.

Holding bar (optional)

Code No.	øD (mm)	L (mm)
21AAA166	ø6	42
136567	ø6	81
124625	ø6.35	81
21AAA167	ø6.35	42
21AAA168	ø8	42
136568	ø8	81

Note: øD and L: detail shown in drawing below.

Optional Accessories

- Limit hand (2 pcs.): **21AAB363**



DIMENSIONS

ISO/JIS Type

Unit: mm

ANSI/AGD Type

Unit: in

Note 1: Contact point (standard accessory) for all products in this page has a role as a top dead point stopper. When replacing it with an optional contact point with a connector not exceeding ø7 mm in outside diameter, insert a washer (with ø7 mm outside diameter, ø3 mm inside diameter, and approximately 0.5 mm thickness) above the contact point.

Note 2: Refer to pages 07-63 to 07-68 for details of contact points.



Continuous scale



Graduation: 0.01 mm,
Measuring range: 5 mm

1160A

Back Plunger



Reverse reading



Graduation: 0.01 mm,
Measuring range: 5 mm

1162A

Back Plunger



Balanced scale



Graduation: 0.01 mm,
Measuring range: 1 mm

1960A

One revolution

Shockproof

Back Plunger

FEATURES

Metric

☐ ISO/JIS type ☐ ANSI/AGD type

Code No.						
1960A		✓	✓	✓		✓
1160A	✓					✓
1162A					✓	✓

Inch

Code No.						
1961A		✓	✓	✓		✓
1166A	✓					✓
1167A		✓				✓
1168A					✓	✓


Dial Indicators

Optional Accessories for Digimatic and Dial Indicators and Linear Gages

Contact points, extension rod

- The thread of all contact points is M2.5 (P=0.45)×5 mm.
- After replacement, it must be tightened firmly to prevent looseness during use (recommended tightening torque: 50 N·cm).
- Carbide and ruby contact points are highly resistant to wear.

Standard contact point

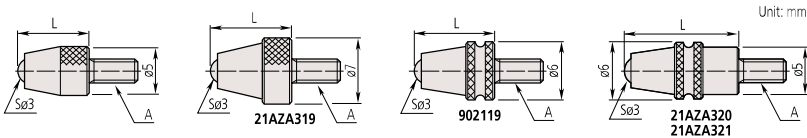

Note: Contact points for water-proof indicators are equipped with a groove to locate the rubber boot.

A: M2.5×0.45


Material L (mm)	Carbide		Ruby	Plastic
	Without groove	With groove (water-proof type)	Without groove	Without groove
7.3	901312	—	120047	901994
8.3	21AZA319	902119	—	—
12.1	—	21AZA320	—	—
14	21JAA225	—	—	—
15	120049	—	120051	—
17	21JAA224	—	—	—
19.3	—	21AZA321	—	—
20	137391	—	137392	—
22	21JAA226	—	—	—
25	120053	—	120055	—
30	21AAA252	—	21AAA253	—



901312



902119

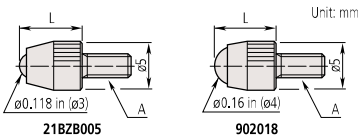


A: 4-48UNF

L (in)	Material		Carbide	Plastic
			21BZB005	902018
1/4			21BZB005	902018

Shell Type Point

Contact point with a large radius.
Optimal for use on flat surfaces.

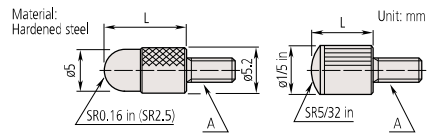


A: M2.5x0.45

Code No.	L (mm)
101386	5
101118	10
137393	15
101387	20
101388	25
21AAA254	30


A: 4-48UNF

Code No.	L (in)
193697	3/32
101184	5/32
21AAA031	1/4
21AAA032	3/8
101185	1/2
21AAA033	5/8
101186	3/4
21AAA034	7/8
101187	1
21AAA035	1 1/4
21AAA036	1 1/2
21AAA037	1 3/4
21AAA038	2
21AAA039	2 1/4
21AAA040	2 1/2
21AAA041	2 3/4
21AAA042	3




Ball point

Optimal for workpieces with deep indentations.

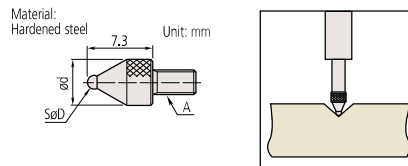


A: M2.5x0.45

Code No.	SøD (mm)	ød (mm)	Spherical tip material
21AAA349	1	5	Carbide
21AAA350	1.5	5	
101122	1.8	5	Hardened steel
21AAA351	2.5	5	Carbide
21AAA352	4	5	



Spherical Point

A large radius makes this contact point optimal for use where the workpiece needs to slide from the side.

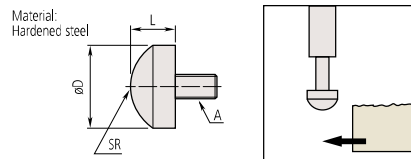


A: M2.5x0.45


Code No.	øD (mm)	L (mm)	SR (mm)
111460	5.5	3	5
125258	7.9	5	5
101119	10	5	7

A: 4-48UNF

Code No.	øD (in)	L (in)	SR (in)
101205	1/2	1/8	0.35
101204	3/8	3/32	0.28



Spherical Point (Carbide)



A: M2.5x0.45


Code No.	øD	ød	L	SR
21AZB751	5.2	4.3	5	5
21AZB752	7.5	6.5	10	7
21AZB753	10.5	9.5	10	10

Dial Indicators

Flat Point




131365



A: M2.5x0.45

Code No.	L
131365	8
21AAB715	10




A: 4-48UNF

Code No.	L (in)
133017	5/16
21AAA043	1/2
21AAA044	3/4
21AAA045	1

Material:
Hardened steel




101117




A: M2.5x0.45

Code No.	øD
101117	10
21AAB711	15
21AAB712	20
21AAB713	25
21AAB714	30



Unit: mm




A: 4-48UNF

Code No.	øD (in)
101188	1/2
101189	3/8


Flat Point (Carbide)



21AZB758



() : For 21AZB757





A: M2.5x0.45

Code No.	øD	ød	L
21AZB756	5.2	4.3*1	5
21AZB757	7	6.5*1	10
21AZB758	10.5	9.5*1	10
21AZB760	17	15*2	10
21AZB761	22	20*2	10
21AZB762	27	25*2	10
21AZB763	32	30*2	10

Flatness: *1: 3 µm, *2: 5 µm



21AZB754





A: M2.5x0.45

Code No.	ød ₀	ød	øD
21AZB754	3	6.4	7
21AZB755	4.5	8	9

Flatness: 3 µm



21AZB759



A: M2.5x0.45



Code No.
21AZB759

Conical Point

Used for positioning the measurement point.
Since it can damage a workpiece easily, it is not suitable for use on soft materials.



101120



A: M2.5x0.45


Code No.	Tip angle	L
101120	60°	10

A: 4-48UNF

Code No.	Tip angle	L (in)
101190	60°	1/2



101385



A: M2.5x0.45

Code No.	Tip angle	L
101385	90°	5


A: 4-48UNF

Code No.	Tip angle	L (in)
101191	90°	1/4

Conical Point (Carbide)



21AZB764




A: M2.5x0.45

Code No.
21AZB764



21AZB765

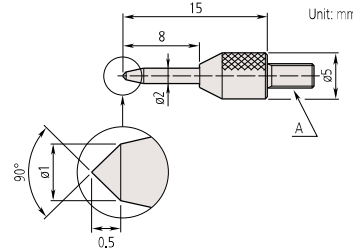

A: M2.5x0.45


Code No.
21AZB765

Needle Point

Suitable for probing the bottom of a groove or hole.



101121

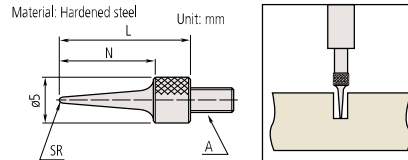

A: M2.5x0.45

Code No.	N	L	SR
101121	11	15	0.4
137413	13	17	0.2
21AAA255	21	25	0.4
21AAA256	31	35	0.4


A: 4-48UNF

Code No.	L (in)	SR (in)
21AAA030	0.6	0.016
21AAA046	1	0.016
21AAA047	1 1/2	0.016
21AAA048	2	0.016

Needle Point (Carbide)



137257

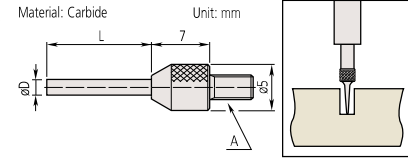

A: M2.5x0.45


Code No.	øD	L
120066	0.45	3
21AAA329	0.45	5
120065	1	3
21AAA330	1	5
21AAA331	1	8
21AAA332	1	10
21AAA333	1	20
21AAA334	1	40
21AAA335	1.5	5
21AAA336	1.5	10
120064	1.5	13
21AAA337	1.5	20
21AAA338	1.5	40
137257	2	8
21AAA257	2	18
21AAA258	2	28
21AAA339	2	40

Blade Point (Carbide)

Suitable for measuring cylinders.



21AZB768

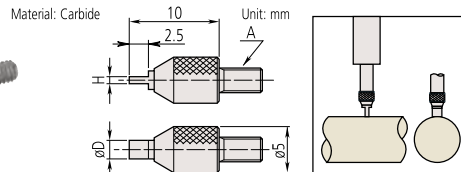


A: M2.5x0.45


Code No.	H	øD
21AZB767	0.4	2
21AZB768	0.6	2
21AZB769	1	4

Knife Edge Point (Carbide)

Suitable for measuring narrow groove diameter, etc.



21AZB766

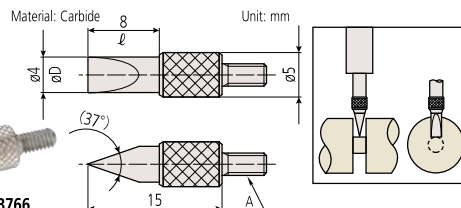


A: M2.5x0.45


Code No.
21AZB766

07 Indicators

* Perform measurement in the same posture and conditions as for the reference setting so that variation due to lever deflection is reduced. Gently bring the contact point into touch with the workpiece. Use a dial indicator with as small a measuring force as possible.

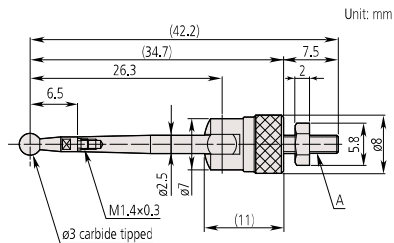

Code No.
900393




The tip of contact point is interchangeable.
Interchangeable contact points (optional)
ø1 mm contact point: **102824**
ø2 mm contact point: **102825**
ø3 mm contact point: **102826** (provided as standard)

Dial Indicators



901954



Code No.
901991

Note 2: High-accuracy roller with 5 μm runout is also available. (Special order item)

Interchangeable Contact Point Set

This set consists of six types of popular contact points for extending the use of an indicator to many applications.




Set code No. **7822**

M2.5x0.45

Code No.	Contact points included
131365	Flat Point (ø5 mm)
101117	Flat Point (ø10 mm)
101121	Needle Point
101119	Spherical Point
101118	Shell Type Point (R2.5x10)
101387	Shell Type Point (R2.5x20)

07
Indicators

Extension Rod

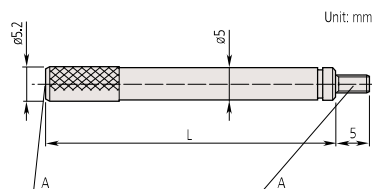


A: M2.5x0.45

Code No.	L
303611	10
21AAA259A	15
303612	20
21AAA259B	25
303613	30
21AAA259C	35
21AAA259D	40
21AAA259E	45
21AAA259F	50
21AAA259G	55
304146	60
21AAA259H	65
21AAA259J	70
21AAA259L	75
21AAA259M	80
304147	90
303614	100


A: 4-48UNF

Code No.	L (in)
139167	1/2
301655	1
301657	2
301659	4

Dial Indicators



Code No.
21AAA011



Code No.
21AAA012

Dial Indicators

Interchangeable Back Covers Optional Accessories for Digimatic and Dial Indicators

Various back covers

- A wide variety of indicator back cover types is available for Mitutoyo Digimatic and dial indicators.
- Most lugged back covers can be rotated by 90° because they have four retaining screws. However, **190561** and **137905** (for compact dial indicators) are only equipped with two retaining screws, therefore the lug orientation cannot be changed.


07

Indicators

Description

Lug-on-Center Back

Clamped by securing the lug section.



Unit: mm



Flat Back

Cannot be clamped by means of the back cover.




Unit: mm



Magnetic Back (Magnetic force: 10 N)

Can be easily attached to the flat surfaces of iron plates or machine tools with a magnet.




Unit: mm



Back with Offset Lug

One side of the lug section is on the center line.




Unit: mm



Back with Post

Used by clamping the $\phi 12.7$ pillar section.




Unit: mm



Back with Screw Mount

Clamped with a screw with its thread as a guide.




Unit: mm



Adjustable Back

Can be slid with the groove as a guide.
Clamped with a screw.



Unit: mm




(): Small type

Back with Adjustable Bracket

Can be attached to a device, jig, or tool and easily fine-tuned vertically with a hex wrench.
(Travel range: Approx. 20 mm)

Attachment procedure

- Attach only the back cover with rack to the dial indicator.
- Attach the main unit to a device, jig, or tool with M6 hexagon socket head cap screws.
- Insert the back cover with rack into the main unit.
- Use the supplied hex wrench (3/32") to fine-tune and fix with clamp screws.

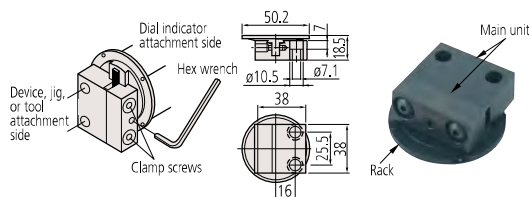

Selection table for various back covers

- If the back cover of water-proof model is replaced, the water resistance will not be guaranteed.
- When mounting a back cover to lightweight type Series (**297*AB**), separately prepare 4 fixing screws (**546666** Self-tapping screw only for plastic). Do not apply a tightening torque of more than 20 N·cm in order to avoid stripping the screw threads.

Dial Indicators


	Metric								
	Bezel diameter	31 mm	36 mm	40 mm	40 mm (W/D proof models)	55.6/57 mm	55.6 mm (W/D proof models)	57 mm (W/D proof models)	78/92 mm
Back Covers	Lug-on-Center Back	190561	137905	101210	101210	101040		21AZB230	100691
	Flat Back	191559	137906	101211	136872	101039	192910	21AZB231	100836
	Magnetic Back	—				900928			900929
	Back with Offset Lug	—				101167			—
	Back with Post	—		193172		101169			—
	Back with Screw Mount	—		193173 (M6×1)		136023 (M6×1)			—
	Adjustable Back	—		136025 (M6×1)		136026 (M6×1)			—
	Back with Adjustable Bracket	—				901963			—

Inch							
Bezel diameter	1.22 in	1.57 in	1.57 in (W/D proof models)	2.19/2.24 in	2.19 in (W/D proof models)	2.24 in (W/D proof models)	3.07/3.62 in
Back Covers	Lug-on-Center Back	190139	101307	101307	101306		100797
	Flat Back	191559	101211	136872	101039	192910	21BZB104 100836
	Magnetic Back	—			900928		900929
	Back with Offset Lug	—			101167		—
	Back with Post	—	193172			101169	—
	Back with Screw Mount	—			101170 (#1/4-28UNF)		—
	Adjustable Back	—	129721 (#1/4-20UNC)			101168 (#1/4-20UNC)	—
	Back with Adjustable Bracket	—			901963		—

Digimatic Indicators

Series/model		•ID-FNX Series (12.7 mm models) •ID-CNX Series (12.7 mm models) •ID-CAX Series •ID-SX Series		•ID-FNX Series (25.4, 50.8 mm models)* •ID-CNX Series (25.4, 50.8 mm models)*		•ID-CJX Series •ID-SPX Series	
Type	ISO/JIS	ASME/ANSI / AGD	ISO/JIS	ASME/ANSI / AGD	ISO/JIS	ASME/ANSI / AGD	
Back Covers	Lug-on-Center Back	101040	101306	101040	101306	21AZB230	21BZB104
	Flat Back	101039		—		21AZB231	
	Magnetic Back	900928					
	Back with Offset Lug	101167					
	Back with Post	101169					
	Back with Screw Mount	136023 (M6x1)	101170 (#1/4-28UNF)	136023 (M6x1)	101170 (#1/4-28UNF)	136023 (M6x1)	101170 (#1/4-28UNF)
	Adjustable Back	136026 (M6x1)	101168 (#1/4-20UNC)	136026 (M6x1)	101168 (#1/4-20UNC)	136026 (M6x1)	101168 (#1/4-20UNC)
	Back with Adjustable Bracket	901963					

* For the ID-CNX, ID-FNX Series (25.4, 50.8 mm/1, 2 inch models), attach the back covers as shown below.



Dial Indicators


Spindle Lifting Lever and Cable Optional Accessories for Digimatic and Dial Indicators

Spindle Lifting Cable

- The spindle can be moved up and down using the lifting lever or the lifting cable.
- Attaching the dial indicator to a stand improves measurement accuracy and efficiency.

Lifting cable

Stroke: 10 mm

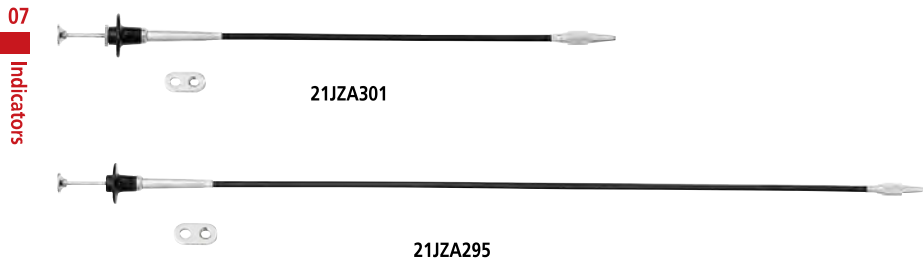

21JZA301: with auto-stop function (300 mm)

21JZA295: without auto-stop function (500 mm)

Note 1: This accessory is not applicable to dial indicators with a range of 20 mm or more, special models (**2048A(B)-10**, **2046A(B)-80**), certain models of 1 series (**1911A(B)-10**, **1913A(B)-10**, **1921A(B)-10**, **1923A(B)-10**, **1925A(B)-10**, **2971AB**, **2972AB**, **2973AB**, **2976AB**, **2977AB**, **2978AB**), back plunger type and water-proof type.

Note 2: The lifting cable is attached to the spindle. Therefore, its weight is added to the measuring force. (Approximately 0.3 N max.)


Spindle Lifting Lever

21EAA426

Suitable for 4.8 mm spindle diameter.



Typical application

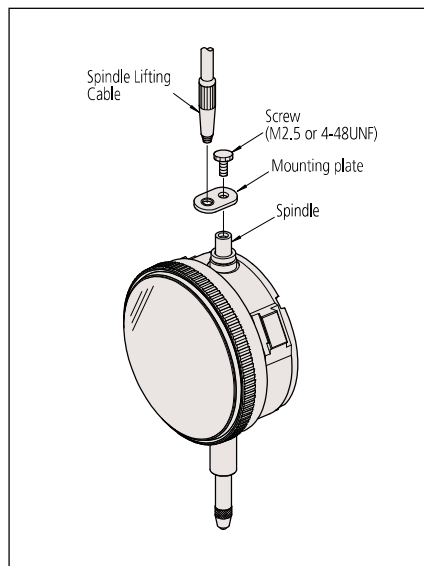

Spindle Lifting Lever (A type)**902100***1Use for A type SERIES **1** dial indicators.**Spindle Lifting Lever (S type)****902100***1Use for S type SERIES **1** dial indicators.**21EZA198***2Use for A type SERIES **2**, **3**, and **4** dial indicators (up to 10 mm/0.4 in).**21AZB149**: Lever
101171: Stop screw**21AZB149***2Use for S type SERIES **2**, **3**, and **4** dial indicators (up to 10 mm/0.4 in).**21AZB150***2Use for A type SERIES **2** and **3** dial indicators (from 10 mm/0.4 in up to 20 mm/0.8 in).**21AZB150***2Use for S type SERIES **2** and **3** dial indicators (from 10 mm/0.4 in up to 20 mm/0.8 in).**Spindle Lifting Lever
(for ID-SS, ID-SX, ID-CX, ID-CNX)****21EZA198***1*3**21AZB149**: Lever
101171: Stop screw

*1 Before use, replace the stop screw with the standard accessory.

*2 Use the stop screw already fixed to the dial indicator body.

*3 Stop screw is for mm model.

Dial Indicators


Limit Stickers

- Place limit stickers on a SERIES 2 indicator dial face or crystal to indicate tolerance limits. Stickers are available in: red, green, and yellow.




07
Indicators

Red

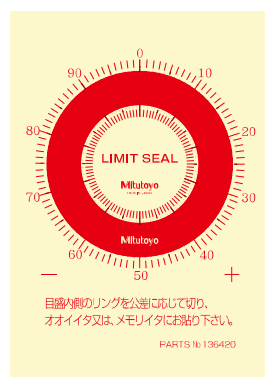

136420
(10 sheets/set)

Green

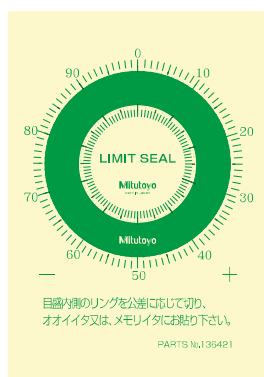

136421
(10 sheets/set)

Yellow



136422
(10 sheets/set)

Color-coded Spindle Caps

- 9 color-coded spindle caps are available for compact/standard dial indicators with a range of 10 mm or less.



Color	Code No.	
	Standard	Water-proof
Black	21AAB675	21AAB676
White	21AAB675W	21AAB676W
Red	21AAB675R	21AAB676R
Green	21AAB675G	21AAB676G
Blue	21AAB675B	21AAB676B
Yellow	21AAB675Y	21AAB676Y
Orange	21AAB675D	21AAB676D
Pink	21AAB675P	21AAB676P
Navy	21AAB675S	21AAB676S

Note: This accessory is not applicable to 1003A(B), 1911A(B)-10, 1913A(B)-10, 1921A(B)-10, 1923A(B)-10, 1925A(B)-10, 2971AB, 2972AB, 2973AB, 2976AB, 2977AB, and 2978AB.

Note: When attaching to small dial indicators, the measuring range height will be 8 mm taller.

Replacing bezels and graduation plates

A bezel and graduation plate must be swaged together so that the graduation plate always rotates with the bezel. Assemblies comprised of a swaged bezel and graduation plate are available for some models.

Code No. of dial indicators	Code No. of swaged assemblies
2046A	21AZB650
2109A-10	21AZB693

Dial Indicator Repair Tools Optional Accessories for Dial Indicators



Pointer removing tip (ø0.8) (126630)



Pointer removing tip (ø0.5) (126630B)



Pointer removing tip (ø1.6) (126630C)



Pointer removing tool (126628)



Adjustable nut (100699)



Pinion rest (129735)



Pin rest (129731)



Spindle rest (129730)



Reamer for pointer (ø0.5: 1/20 taper) (21JAA273)



Punch (129733)



Reamer (ø0.6: 1/50 taper) (193702)



Bearing adjuster (129734)



Reamer (ø1: 1/50 taper) (129736)



Pin remover (129732)

Special repairing technique is necessary for repair work. Note that we cannot guarantee accuracy if critical parts are disassembled.

We recommend that you use our repair service to operate the instrument with peace of mind.

Typical applications

Remove the long hand

Select an appropriate pointer removing tip for the diameter of the hole of the long hand, and attach it to the pointer removing tool using the adjustable nut. Push the pivot with the pointer removing tool to remove the long hand.

Remove or replace a pin

Place the spindle on the V-groove of the spindle rest. Remove the pin using the pin remover and a commercially available hammer.

To press-fit the pin, tap it directly using a hammer, etc.

Replace the long or little hand

Screw the pinion rest into the pin rest.

Support the pinion with the pinion rest and press-fit the pointer using the punch and a commercially available hammer,

etc. When replacing with a new pointer on an old type of dial indicator or test indicator, reaming is necessary before press-fitting. Use a commercially available pin device (for ø0.8 to 1.2) with one of the following reamers attached.

- Pointers of dial indicators (A type) and TI-X Series*¹ do not require a reamer.
- Use the reamer for pointer (ø0.5: 1/20 taper) for S type and T type dial indicators*².
- Depending on the shaft diameter, use reamer (ø1: 1/50 taper) or reamer (ø0.6: 1/50 taper) for F type dial indicators and other than TI-X Series dial test indicators.

*¹ Dial test indicator whose model No. ends in "X".

*² Dial indicator whose code No. includes an "S" and "T".


Dial Test Indicators

SERIES 513 — Dial Test Indicator Features


Provides easy access to narrow or recessed areas that cannot be reached with conventional dial indicators.

- Five types are available: standard, standard (20° Tilted face), vertical, horizontal, and universal, allowing users to select the model most suited to their needs.
- Newly designed contact point holder prevents backlash and permits smooth pointer operation.
- Ruby tip has wear-resistance several times greater than a carbide tip and, since it is nonconductive, it can be used safely on an electrical discharge machine.
- The pointer and carbide contact point are weakly magnetic.
- Note 1: Magnetic material is used for some internal parts.
- Contact point length is printed on dial face to avoid accuracy issues.
- Note 2: Attaching a contact point of incorrect length will lead to measurement failure.
- Glare-free flat crystal face allows easy reading of graduations. Multi-layer and composite coatings provide a more stain-resistant, anti-reflective crystal.
- Bonding the bezel and crystal together leaves no gap for cutting fluid or oil to penetrate through to the dial face. (Note that this type is NOT water-proof.)
- The main unit is equipped with three dovetails to which the stem with dovetail groove $\varnothing 6$ (standard accessory) can be attached. This greatly improves convenience as the attachment location can be adjusted as needed.
- Metric Dial Test Indicator is inspected according to JIS B 7533:2015. Standard, 20° tilted face, and vertical types are inspected with the dial face in the upward orientation, while the horizontal type is inspected with the dial face in the vertical orientation to guarantee their accuracy.

Standard

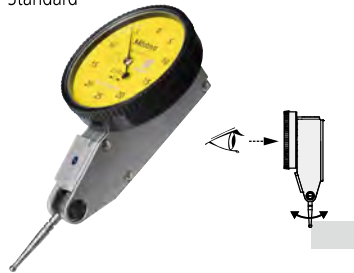

Standard
(20° Tilted face)



Vertical



Horizontal



Universal



Naming of parts



Feature icons

Icon	Feature description
	High accuracy
	With revolution counter
	Long contact point
	Standard
	Double scale spacing
	Compact (Small face diameter)
	Carbide contact point
	Ruby contact point (Non-conductive and abrasion resistant)




Dial Test Indicator SERIES 513 — Standard Type

DIMENSIONS


Standard

Unit: mm

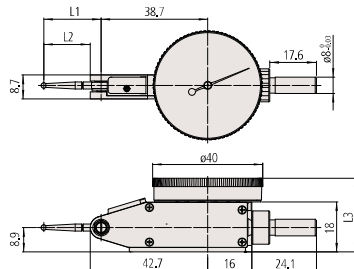

Code No.	L1	L2	L3
513-401-10E	14.7	11.2	27
513-471-10E			
513-405-10E/A/T	18.7	15.2	28
513-475-10E			
513-425-10E/A	20.9	17.4	27
513-404-10E/A/T			
513-474-10E	22.2	18.7	28
513-424-10E/A/T	37.4	33.9	27
513-426-10E/A			
513-478-10E	44.5	41.0	
513-414-10E/A/T			
513-415-10E/A/T			
513-477-10E			

Compact



Type	Code No.	L1	L2
Compact	513-465-10E	18.7	15.2
	513-464-10E	20.9	17.4
	513-466-10E	22.2	18.7

Note: A slight difference may occur depending on the center of the contact point, graduation plate, and stem fixing position, etc.

Special Set: 513-908-10E (Metric)

513-404-10E: Dial test indicator
7014-10: Mini magnetic stand

513-907-10E (inch)

513-402-10E: Dial test indicator
7014E-10: Mini magnetic stand



513-404-10E
Contact point No. 103006



513-415-10E
Contact point No. 136013



513-465-10E
Contact point No. 103011



513-402-10E
Contact point No. 133195



Graduation: 0.01 mm
Range: 0.8 mm

513-404-10E / 10A / 10T

Standard

Carbide contact point




Graduation: 0.01 mm
Range: 0.5 mm

513-424-10E / 10A / 10T

Standard

Double scale spacing

Carbide contact point




Graduation: 0.01 mm
Range: 0.5 mm

513-414-10E / 10A / 10T

Long contact point

Carbide contact point

Double scale spacing



Graduation: 0.01 mm
Range: 1.0 mm

513-415-10E / 10A / 10T

Long contact point

Carbide contact point



Graduation: 0.002 mm
Range: 0.2 mm

513-405-10E / 10A / 10T

Standard

Carbide contact point



Graduation: 0.002 mm
Range: 0.6 mm

513-425-10E / 10A

With revolution counter

Carbide contact point



Graduation: 0.002 mm
Range: 0.2 mm

513-465-10E

Compact

Carbide contact point



Graduation: 0.001 mm
Range: 0.14 mm

513-401-10E

High accuracy

Carbide contact point



Graduation: 0.0005 in
Range: 0.03 in

513-402-10E / 10T

Standard

Carbide contact point



Graduation: 0.0001 in
Range: 0.008 in

513-403-10E / 10T

Standard

Carbide contact point

Note: 513-4XX-10 is indicated on the dial face and the inspection certificate.

The code No. with suffix (E/T/A) is a set item which includes accessories. The main unit is not available as a standalone item.

Dial Test Indicators

Dial Test Indicator SERIES 513 — Standard Type

SPECIFICATIONS

Metric

Code No.			Graduation (mm)	Range (mm)	Dial reading	Maximum permissible error (MPE)*1 (μm)			Mass (g)	Measuring force (N)	High accuracy	With revolution counter	Long contact point	Standard	Double scale spacing	Compact	Carbide contact point	Ruby contact point
Basic set	Plus set	Full set				Measuring range	One rev.	10 scale divisions	Hysteresis	Repeatability								
513-424-10E	513-424-10A	513-424-10T	0.01	0.5	0-25-0	6	—	5	4	3	45	0.3 or less	✓	✓	✓	✓	✓	✓
513-478-10E	—	—				10					41							
513-466-10E	—	—				16					45							
513-414-10E	513-414-10A	513-414-10T				10					45							
513-426-10E	513-426-10A	—		1.5	0-40-0	9	—	5	4	3	45	0.2 or less	✓	✓	✓	✓	✓	✓
513-404-10E	513-404-10A	513-404-10T				16					41							
513-474-10E	—	—		0.8	0-100-0	4	—	3	1	1	45	0.3 or less	✓	✓	✓	✓	✓	✓
513-464-10E	—	—				7					41							
513-415-10E	513-415-10A	513-415-10T		1.0	0-50-0	10	—	5	4	3	45	0.2 or less	✓	✓	✓	✓	✓	✓
513-477-10E	—	—				10					41							
513-405-10E	513-405-10A	513-405-10T	0.002	0.2	0-100-0	4	—	3	1	1	45	0.3 or less	✓	✓	✓	✓	✓	✓
513-475-10E	—	—				7					41							
513-465-10E	—	—				10					45							
513-425-10E	513-425-10A	—				10					41							
513-401-10E	—	—	0.001	0.14	0-70-0	4	—	3	1	1	45	0.3 or less	✓	✓	✓	✓	✓	✓
513-471-10E	—	—				10					41							
513-908-10E ²⁾	—	—	0.01	0.8	0-40-0	9	—	5	4	3	45	0.3 or less	✓	✓	✓	✓	✓	✓

Inch

Code No.			Graduation (in)	Range (in)	Dial reading	Maximum permissible error (MPE)*1 (in)			Mass (g)	Measuring force (N)	High accuracy	With revolution counter	Long contact point	Standard	Double scale spacing	Compact	Carbide contact point	Ruby contact point
Basic set	Plus set	Full set				One rev.	Hysteresis	Repeatability										
513-402-10E	—	513-402-10T	0.0005	0.03	0-15-0	±0.0005	0.0002	±0.0002	45	0.3 or less	✓	✓	✓	✓	✓	✓	✓	✓
513-472-10E	—	—																
513-412-10E	—	513-412-10T																
513-479-10E	—	—																
513-462-10E	—	—	0.0005	0.008	0-4-0	±0.0001	0.0001	±0.0004	45	0.3 or less	✓	✓	✓	✓	✓	✓	✓	✓
513-407-10E	—	513-407-10T																
513-403-10E	—	513-403-10T																
513-473-10E	—	—																
513-463-10E	—	—	0.0001	0.008	0-4-0	±0.0001	0.0001	±0.0004	45	0.3 or less	✓	✓	✓	✓	✓	✓	✓	✓
513-907-10E ³⁾	—	—																
513-907-10E ³⁾	—	—	0.0005	0.03	0-15-0	±0.0005	0.0002	±0.0002	45	0.3 or less	✓	✓	✓	✓	✓	✓	✓	✓

Metric/Inch

Code No.			Graduation	Range	Dial reading	Maximum permissible error (MPE)*1 (μm)			Mass (g)	Measuring force (N)	High accuracy	With revolution counter	Long contact point	Standard	Double scale spacing	Compact	Carbide contact point	Ruby contact point
Basic set	Plus set	Full set				Measuring range	10 scale divisions	Hysteresis	Repeatability									
513-409-10E	—	513-409-10T	0.002 mm /0.0001 in	0.2 mm /0.0076 in	0-10-0 /0-38-0	4	2	3	1	45	0.3 or less	✓	✓	✓	✓	✓	✓	✓

Inch / Metric

Code No.			Graduation	Range	Dial reading	Maximum permissible error (MPE)*1 (in)			Mass (g)	Measuring force (N)	High accuracy	With revolution counter	Long contact point	Standard	Double scale spacing	Compact	Carbide contact point	Ruby contact point
Basic set	Plus set	Full set				One rev.	Hysteresis	Repeatability										
513-406-10E	—	513-406-10T	0.0005 in /0.01 mm	0.03 in /0.7 mm	0-15-0 /0-35-0	±0.0005	0.0002	±0.0002	45	0.3 or less	✓	✓	✓	✓	✓	✓	✓	✓

*1 We guarantee the accuracy of completed products by inspecting them with the dial face facing upward.


*2 A set consisting of **513-404-10E** and **7014-10**.

*3 A set consisting of **513-402-10E** and **7014E-10**.


Note: Stem with dovetail groove is not included in the mass.

Set Configuration: Metric and Metric/Inch


Full set

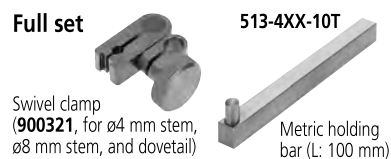


Plus set



Basic set




513-4XX-10 is indicated on the dial face.




Set Configuration: Inch and Inch/Metric


Full set

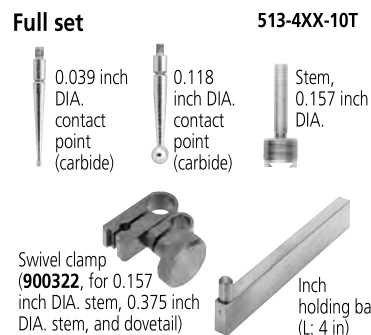

Basic set




513-4XX-10 is indicated on the dial face.






Example of use of a test indicator with a tilted dial face













- The dial face obliquely faces upward, allowing users to read the graduations from the user's side. It is convenient when probing on the side of a large workpiece and the workbench is high.



- Using the universal holder allows easy hole centering. The dial face always faces upward when the indicator is rotated, which makes reading easy.



Dial Test Indicator SERIES 513 — Standard (20° Tilted Face), Vertical, and Horizontal Types

 <p>513-454-10E/10A/10T Contact point No. 103006</p>	 <p>Graduation: 0.01 mm Range: 0.8 mm</p>	<input checked="" type="checkbox"/> Carbide contact point
 <p>513-452-10E/10T Contact point No. 133195</p>	 <p>Graduation: 0.0005 in Range: 0.03 in</p>	<input checked="" type="checkbox"/> Carbide contact point
 <p>513-444-10E/10A/10T Contact point No. 103006</p>	 <p>Graduation: 0.01 mm Range: 1.6 mm</p>	<input checked="" type="checkbox"/> With revolution counter <input checked="" type="checkbox"/> Carbide contact point
 <p>513-445-10E/10A/10T Contact point No. 103011</p>	 <p>Graduation: 0.002 mm Range: 0.4 mm</p>	<input checked="" type="checkbox"/> With revolution counter <input checked="" type="checkbox"/> Carbide contact point
 <p>513-484-10E/10A/10T Contact point No. 103006</p>	 <p>Graduation: 0.01 mm Range: 0.8 mm</p>	<input checked="" type="checkbox"/> Carbide contact point
 <p>513-485-10E Contact point No. 103011</p>	 <p>Graduation: 0.002 mm Range: 0.2 mm</p>	<input checked="" type="checkbox"/> Carbide contact point

Note: **513-4XX-10** is indicated on the dial face and the inspection certificate.

The code No. with suffix (E/A/T) is a set item which includes accessories. The main unit is not available as a standalone item.

Dial Test Indicators



With revolution counter



Long contact point



Carbide contact point

SPECIFICATIONS

Metric		Standard (20° tilted face) type									
Code No.	Graduation (mm)	Range (mm)	Dial reading	Maximum permissible error (MPE)* (μm)	Measuring range	One rev.	10 scale divisions	Hysteresis	Repeatability	Mass (g)	Measuring force (N)
Basic set	Plus set	Full set									
513-444-10E	513-444-10A	513-444-10T	0.01	1.6	0-40-0	16	10	5	5	3	48
513-445-10E	513-445-10A	513-445-10T	0.002	0.4	0-100-0	6	5	2	4	1	
Inch		Standard (20° tilted face) type									
Code No.	Graduation (in)	Range (in)	Dial reading	Maximum permissible error (MPE)* (in)	Measuring range	One rev.	First 2.5 rev.	Hysteresis	Repeatability	Mass (g)	Measuring force (N)
Basic set	Plus set	Full set									
—	513-442-10A	513-442-10T	—	—	—	—	—	—	—	—	—
—	513-442-16A	513-442-16T	0.0005	0.06	0-15-0	±0.0005	±0.0005	0.0002	±0.0002	48	0.3 or less
—	513-446-10A	513-446-10T	—	—	—	—	—	—	—	—	—
—	513-446-16A	513-446-16T	—	—	—	—	—	—	—	—	—
—	513-443-10A	513-443-10T	0.0001	0.016	0-4-0	±0.0002	±0.0002	0.0001	±0.00004		0.3 or less
—	513-443-16A	513-443-16T	—	—	—	—	—	—	—	—	—
Metric		Vertical type									
Code No.	Graduation (mm)	Range (mm)	Dial reading	Maximum permissible error (MPE)* (μm)	Measuring range	One rev.	10 scale divisions	Hysteresis	Repeatability	Mass (g)	Measuring force (N)
Basic set	Plus set	Full set									
513-456-10E	—	—	0.01	0.5	0-25-0	6	—	5	4	3	46
513-454-10E	513-454-10A	513-454-10T	0.002	0.8	0-40-0	9	—	—	—	—	—
513-455-10E	513-455-10A	513-455-10T	—	0.2	0-100-0	4	—	2	3	1	—
Inch		Vertical type									
Code No.	Graduation (in)	Range (in)	Dial reading	Maximum permissible error (MPE)* (in)	Measuring range	One rev.	First 2.5 rev.	Hysteresis	Repeatability	Mass (g)	Measuring force (N)
Basic set	Plus set	Full set									
513-452-10E	—	513-452-10T	0.0005	0.03	0-15-0	±0.0005	—	0.0002	±0.0002	46	0.3 or less
513-453-10E	—	513-453-10T	0.0001	0.008	0-4-0	±0.0001	—	0.0001	±0.00004		0.3 or less
Metric		Horizontal Type									
Code No.	Graduation (mm)	Range (mm)	Dial reading	Maximum permissible error (MPE)* (μm)	Measuring range	One rev.	10 scale divisions	Hysteresis	Repeatability	Mass (g)	Measuring force (N)
Basic set	Plus set	Full set									
513-486-10E	—	—	0.01	0.5	0-25-0	6	—	5	4	3	53
513-484-10E	513-484-10A	513-484-10T	—	0.8	0-40-0	9	—	—	—	—	—
513-485-10E	—	—	0.002	0.2	0-100-0	4	—	2	3	1	—
Inch		Horizontal Type									
Code No.	Graduation (in)	Range (in)	Dial reading	Maximum permissible error (MPE)* (in)	Measuring range	One rev.	First 2.5 rev.	Hysteresis	Repeatability	Mass (g)	Measuring force (N)
Basic set	Plus set	Full set									
—	513-482-10A	513-482-10T	0.0005	0.03	0-15-0	±0.0005	—	0.0002	±0.0002	53	0.3 or less

* Standard (20° Tilted Face) Type, Vertical Type: We guarantee the accuracy of completed products by inspecting them with the dial face facing upward.


Horizontal Type: We guarantee the accuracy of completed products by inspecting them with the dial face vertical.

Note: 513-4XX-1X is indicated on the dial face and the inspection certificate.

The code No. with suffix (E/A/T) is a set item which includes accessories. The main unit is not available as a standalone item.


DIMENSIONS

Standard (20° Tilted Face) Type



Code No.	L1	L2
513-445-10E	18.7	15.2
513-444-10E	20.9	17.4


Vertical Type



Code No.	L1	L2
513-484-10E	20.9	17.4
513-485-10E	18.7	15.2
513-486-10E	22.2	18.7

Code No.	L1	L2
513-454-10E	20.9	17.4
513-455-10E	18.7	15.2
513-456-10E	22.2	18.7

Horizontal Type




Note: A slight difference may occur depending on the center of the contact point, graduation plate, and stem fixing position, etc.

Set Configuration: Metric


Full set




Plus set



Basic set



513-4XX-10 is indicated on the dial face.




Set Configuration: Inch


Full set




Plus set



Basic set





513-4XX-1X is indicated on the dial face.







Set Configuration: Metric

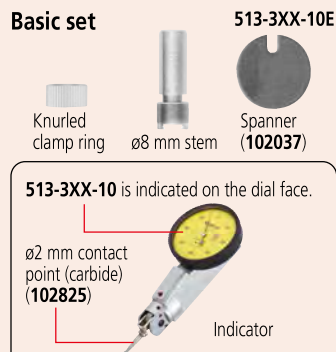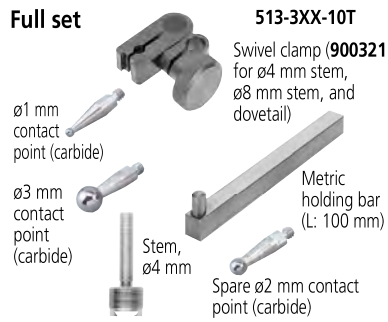

Set Configuration: Inch

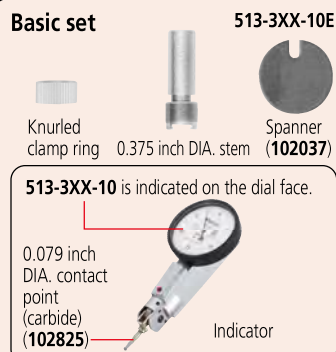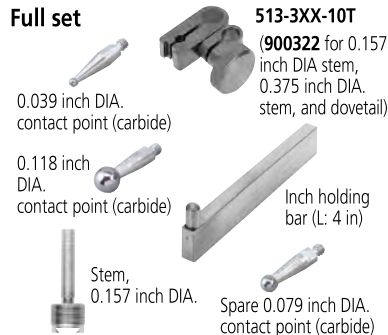


Optional Accessories

- Swivel clamps (See page 07-84)
- Holding bars (See page 07-85)
- Stems (See page 07-85)
- 102824:** $\varnothing 1$ mm contact point (carbide)
- 102825:** $\varnothing 2$ mm contact point (carbide)
- 102826:** $\varnothing 3$ mm contact point (carbide)

Dial Test Indicator SERIES 513 — Universal Type












Universal Type





















- The direction of the probe movement can be freely changed by rotating the contact point section of the indicator.

07
Indicators


SPECIFICATIONS

Metric																				
Code No.		Graduation (mm)	Range (mm)	Dial reading	Maximum permissible error (MPE)* (μm)					Mass (g)	Measuring force (N)									
Basic set	Full set				Measuring range	One rev.	10 scale divisions	Hysteresis	Repeatability											
513-304-10E	513-304-10T	0.01	0.8	0-40-0	9	—	5	4	3	71	0.3 or less									

Inch																				
Code No.		Graduation (in)	Range (in)	Dial reading	Maximum permissible error (MPE)* (in)			Mass (g)	Measuring force (N)	 High accuracy	 With revolution counter	 Long contact point	 Standard	 Double scale spacing	 Compact	 Dustproof	 Carbide contact point	 Ruby contact point		
Basic set	Full set				One rev.	Hysteresis	Repeatability													
513-302-10E	513-302-10T	0.0005	0.03	0-15-0	±0.0005	0.0003	±0.0003	71	0.3 or less											

* The accuracy is guaranteed when used with the dial face facing upward and the contact point oriented as shown in the figure.
Note: **513-3XX-10** is indicated on the dial face and the inspection certificate.
The code No. with suffix (E/T) is a set item which includes accessories. The main unit is not available as a standalone item.

DIMENSIONS

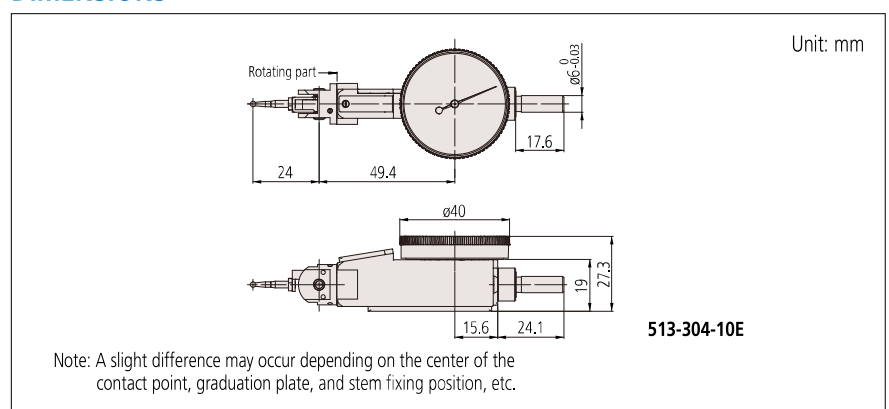

513-304-10E

Unit: mm

Dial Test Indicators

Dial Test Indicators

Pocket Type Dial Test Indicator SERIES 513

- This test indicator series is slimmer than standard test indicators without a clutch lever, making it more suitable for measuring deep points.
- Contact point length is printed on dial face to avoid accuracy issues.
- Note 1: Attaching a contact point of incorrect length will lead to measurement failure.
- Glare-free flat crystal face allows easy reading of graduations. Multi-layer composite coatings make the crystal more anti-reflective and stain resistant.

- Bonding the bezel and crystal together leaves no gap for cutting fluid or oil to penetrate through to the dial face. (Note that this type is NOT water-proof.)
- Clutch type (with a clutch lever)
- Note 2: See page 07-83 for notes on differences with models that do not have a clutch lever.
- A $\varnothing 2$ mm carbide contact point is supplied as standard.
- Metric Dial Test Indicator is inspected according to JIS B 7533:2015. We guarantee accuracy by inspecting with the dial face facing upward.




Graduation: 0.01 mm
Range: 0.8 mm

- 513-517-10E/
513-517-10T
- Standard
 - Compact
 - Carbide contact point



Graduation: 0.01 mm
Range: 1 mm

- 513-515-10E/
513-515-10T
- Long contact point
 - Compact
 - Carbide contact point




Graduation: 0.001 mm
Range: 0.14 mm

- 513-501-10E/
513-501-10T
- High accuracy
 - Compact
 - Carbide contact point



Graduation: 0.01 mm
Range: 0.5 mm

- 513-514-10E/
513-514-10T
- Long contact point
 - Double scale spacing
 - Compact
 - Carbide contact point





Graduation: 0.002 mm
Range: 0.2 mm

- 513-503-10E/
513-503-10T
- Standard
 - Compact
 - Carbide contact point




Set Configuration: Metric

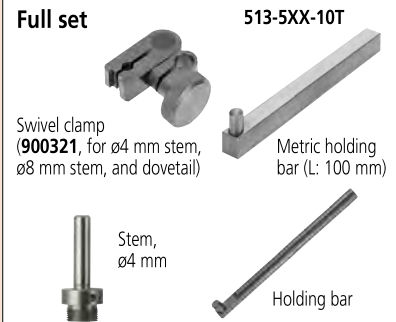

513-5XX-10 is indicated on the dial face.



Set Configuration: Inch

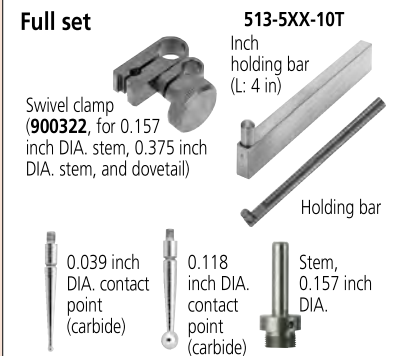

513-5XX-10 is indicated on the dial face.





Graduation: 0.001 in
Range: 0.04 in

513-518-10E/
513-518-10T

- ☒ Compact
- ☒ Carbide contact point



Graduation: 0.0005 in
Range: 0.02 in

513-512-10E/
513-512-10T

- ☒ Long contact point
- ☒ Double scale spacing
- ☒ Compact
- ☒ Carbide contact point



Graduation: 0.0001 in
Range: 0.01 in

513-504-10E/
513-504-10T

- ☒ Compact
- ☒ Carbide contact point

SPECIFICATIONS

Code No.		Maximum permissible error (MPE)* (μm)								Mass (g)	Measuring force (N)	High accuracy	With revolution counter	Long contact point	Standard	Double scale spacing	Compact	Carbide contact point	Ruby contact point
Basic set	Full set	Graduation (mm)	Range (mm)	Dial reading	Measuring range	One rev.	10 scale divisions	Hysteresis	Repeatability										
513-517-10E	513-517-10T	0.01	0.8	0-40-0	9	—	5	4	3	50	0.3 or less	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
513-514-10E	513-514-10T	0.01	0.5	0-25-0	10	—	5	5	3	51	0.3 or less	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
513-515-10E	513-515-10T	0.01	1	0-50-0	10	—	5	5	3	51	0.3 or less	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
513-503-10E	513-503-10T	0.002	0.2	0-100-0	4	—	2	3	1	50	0.4 or less	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
513-501-10E	513-501-10T	0.001	0.14	0-70-0	4	—	2	3	1	50	0.5 or less	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

Code No.		Maximum permissible error (MPE)* (in)								Mass (g)	Measuring force (N)	High accuracy	With revolution counter	Long contact point	Standard	Double scale spacing	Compact	Carbide contact point	Ruby contact point
Basic set	Full set	Graduation (in)	Range (in)	Dial reading	One rev.	First 2.5 rev.	Hysteresis	Repeatability											
513-518-10E	513-518-10T	0.001	0.04	0-20-0	±0.001	—	0.0002	±0.0004	50	0.3 or less	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
513-512-10E	513-512-10T	0.0005	0.02	0-10-0	±0.0005	—	0.0002	±0.0002	51	0.3 or less	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
513-504-10E	513-504-10T	0.0001	0.01	0-5-0	±0.0002	—	0.0001	±0.00004	50	0.3 or less	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

* We guarantee the accuracy of completed products by inspecting them with the dial face facing upward.

Note 1: Be sure to perform calibration with reference gage, etc. after exchanging the contact point. The inside parts may be damaged when the contact point is exchanged due to the breakage. In the case the of the significant deterioration in the operation, repair is required.

Note 2: Stem is not included in the mass.


Note 3: 513-5XX-10 is indicated on the dial face and the inspection certificate.

The code No. with suffix (E/T) is a set item which includes accessories. The main unit is not available as a standalone item.


Dial Test Indicators

Pocket Type Dial Test Indicator SERIES 513

DIMENSIONS

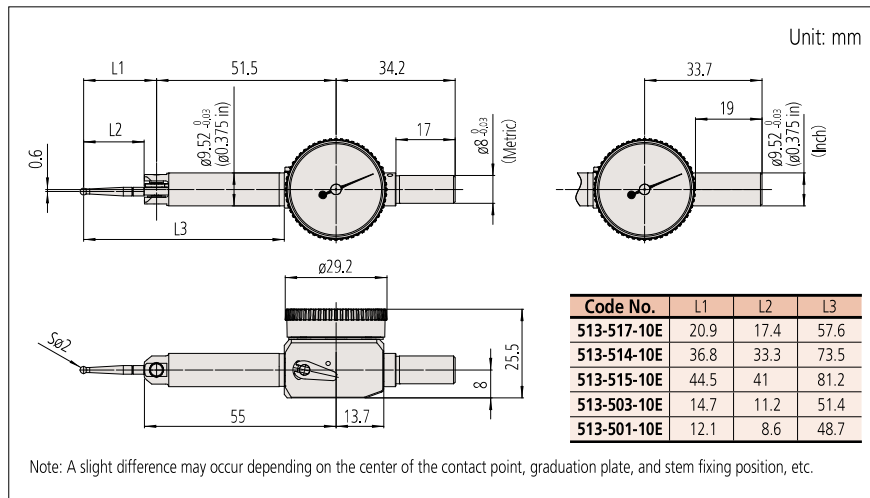


Pocket type can be fixed at the body (at $\varnothing 9.52$ ($\varnothing 0.375$ in))

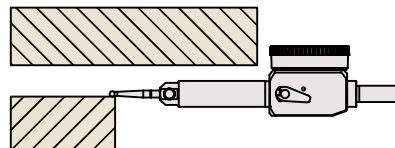

The slim body allows measurements in shallow space.

There are two types of Mitutoyo Dial Test Indicator:
The non-clutch type (without a clutch lever) and the clutch type (with a clutch lever)

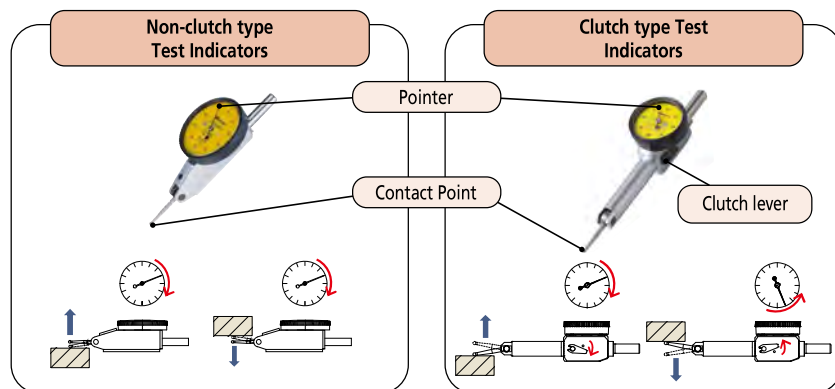


In the non-clutch type, although the contact point may move either in the upward or downward direction, the pointer always rotates clockwise.

In the clutch type, if the clutch lever is set in one position the contact point moves in the upward direction and the pointer rotates clockwise. Conversely, if the lever is set in the other position the contact point moves in the downward direction and the pointer rotates counterclockwise.

Contact points, Stems and Holders Optional Accessories for Dial Test Indicators

Contact point (for Metric Models Only*)

* Except for universal type dial test indicator (513-304-10).

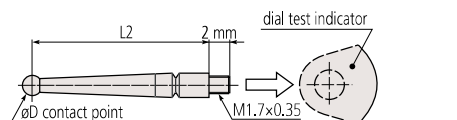

Ø0.5 mm contact point (Steel) **Ø0.7 mm contact point (Steel)**



190547 (L2=11.2 mm) **190548** (L2=11.2 mm)
21CAB109 (L2=15.2 mm) **21CAB110** (L2=15.2 mm)
190549 (L2=17.4 mm) **190550** (L2=17.4 mm)
190654 (L2=18.7 mm) **190653** (L2=18.7 mm)
21CAB111 (L2=33.9 mm) **21CAB112** (L2=33.9 mm)
190656 (L2=41.0 mm) **190655** (L2=41.0 mm)

Ø1 mm contact point (Carbide) **Ø2 mm contact point (Carbide)**



103017 (L2=11.2 mm) **103010** (L2=11.2 mm)
131314 (L2=15.2 mm) **103011** (L2=15.2 mm)
103013 (L2=17.4 mm) **103006** (L2=17.4 mm)
137558 (L2=18.7 mm) **137557** (L2=18.7 mm)
131316 (L2=33.9 mm) **131324** (L2=33.9 mm)
136235 (L2=41.0 mm) **136013** (L2=41.0 mm)

Ø2 mm contact point (Ruby) **Ø3 mm contact point (Carbide)**



21CZA209 (L2=11.2 mm) **103018** (L2=11.2 mm)
21CZB068 (L2=15.2 mm) **131315** (L2=15.2 mm)
21CZA201 (L2=17.4 mm) **103014** (L2=17.4 mm)
21CZA210 (L2=18.7 mm) **137559** (L2=18.7 mm)
21CZA211 (L2=41.0 mm) **131317** (L2=33.9 mm)
136236 (L2=41.0 mm)

Swivel Clamps

For Ø6 mm stem,
Ø8 mm stem, and
dovetail



902053

For Ø4 mm stem,
Ø8 mm stem, and
dovetail




900321

For 0.157 inch DIA. stem,
0.375 inch DIA. stem,
and dovetail



900322


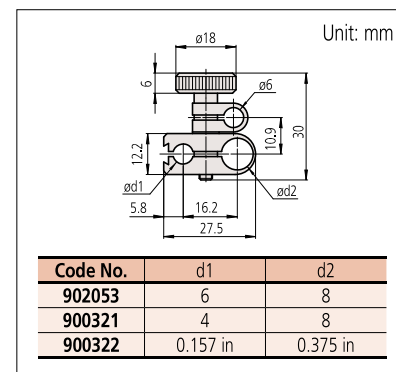


Universal Holder (dovetail clamp)

- A universal holder is an attachment used to mount a dial test indicator in a machine tool spindle so that it can be used to align the spindle axis with a workpiece feature such as a hole center, or a machine axis with an edge. (See diagram on the right.) It also gives some protection against accidental impacts on the indicator.



21CZA233 (Ø8 mm stem)
21CZA231 (0.25 inch DIA. stem)
21CZA229 (Ø6 mm stem)



Dial Test Indicators

Contact points, Stems and Holders Optional Accessories for Dial Test Indicators

Spanner



102037

Holding Bars

07
Indicators



9x9 mm

953638 (Length: 50 mm)
900209 (Length: 100 mm)



ø8 mm (0.315 inch DIA) 900211 (Length: 115 mm/4.528 in)



0.25 in x 0.5 in

953639 (Length: 2 in)
900306 (Length: 4 in)

Stems with Knurled Clamp Ring

ø4 mm
(0.157 inch DIA.)



21CZB131

ø8 mm



21CZB129

0.375 inch DIA.



21CZB130


Stem DIA. ød	Stem with dovetail (Individual item)	Nut (Individual item)	Full set (Stem with dovetail+Nut)
	Code No.		
ø4	21CAB106	190322	21CZB131
ø6	21CAB103	190322	21CZB128
ø8	21CAB104	190322	21CZB129
ø0.375 in	21CAB105	190322	21CZB130

Centering Holder

- Allows large diameter cylinders or holes to be centered on a machine tool.




901959 (ø8 mm stem)
901997 (0.25 inch DIA. stem)

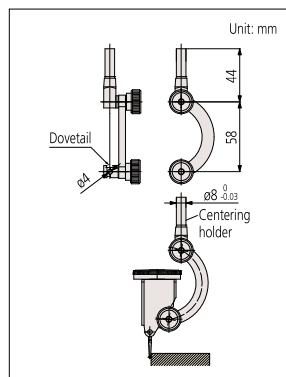


Optional Accessories for Pocket Type Dial Test Indicators

Contact point (for Metric Models Only)

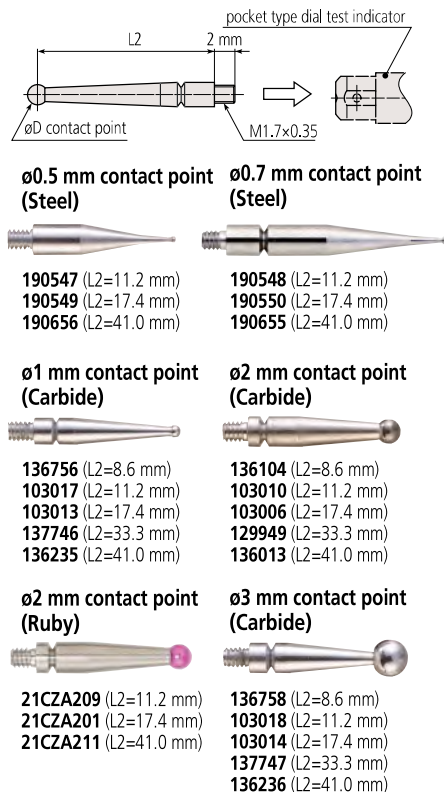

Universal Holder (screw clamp)

- A universal holder is an attachment used to mount a dial test indicator in a machine tool spindle so that it can be used to align the spindle axis with a workpiece feature such as a hole center, or a machine axis with an edge. (See diagram below.) It also gives some protection against accidental impacts on the indicator.

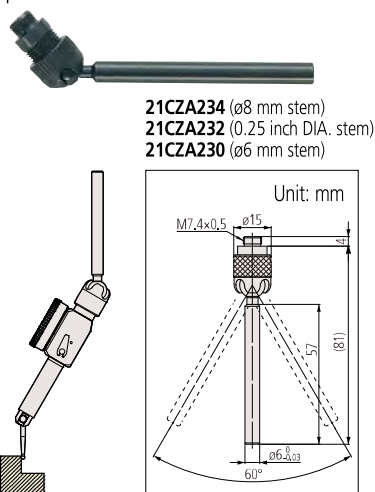

Swivel Clamps

For ø6 mm stem, ø8 mm stem, and dovetail



902053

For ø4 mm stem and ø8 mm stem, and dovetail




900321

For 0.157 inch DIA. stem and 0.375 inch DIA. stem, and dovetail



900322

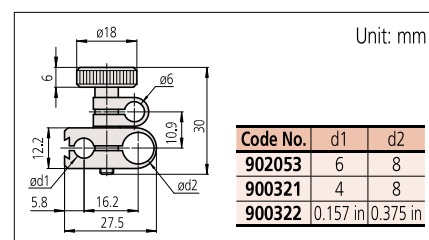


Spanner



301336

Holding Bars

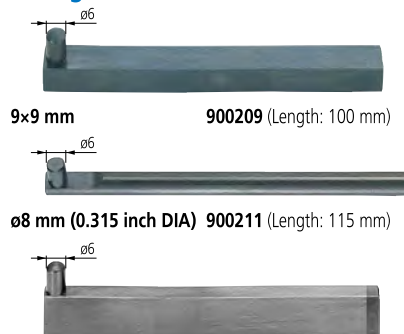

0.25x0.5 in

953639 (Length: 2 in)
900306 (Length: 4 in)

Note: Suitable for height gages with a scribe section of 12.7x6.35 mm.

Stems

ø4 mm (0.157 inch DIA.) ø8 mm (0.315 inch DIA.) 0.375 inch DIA.



102036



102822



102081